

Expedition

Designed by Robert Kaufman Fabrics

Featuring

*Nature
Studies*











Finished quilt measures: 48" x 48"

Pattern Level: Experienced Intermediate

"I know the ropes and would like to test my skills!"

ROBERT KAUFMAN
F A B R I C S

Fabric and Supplies Needed

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	AWR-14632-286 WILD	5/8 yard		F	K001-1154 GOLD	1 yard
	B	K001-1019 BLACK	1/2 yard		G	K001-1162 HONEY	1/2 yard
	C	K001-1069 CHAMPAGNE	1/4 yard		H	K001-1187 KHAKI	1 yard
	D	K001-1080 COAL	1/4 yard		I	K001-1237 MOCHA	1/2 yard

You will also need:
1/3 yard Binding and 3 yards Backing Fabric and Batting

Notes Before You Begin

- Please read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Press all seam allowances open after each seam is sewn, unless otherwise noted.
- Remember to measure twice and cut once!

- Print five copies of page 7 at 100% and six copies of page 8 at 100% and cut foundation templates out along gray lines.

Tips For Paper-piecing

- Sew the sections in numerical order.
 - Place your fabric on the unprinted side of the template and sew on the printed side.
 - Use a short stitch length (about a 1.5).
 - Backstitch in the seam allowance at the beginning and ending of each seam.
 - Trim the seam allowance to 1/4" after each seam and press flat with a dry iron.
- This will keep your seams crisp and your quilt flat.

Cutting Instructions

Fabric A

- Fussycut six squares 10-1/2" x 10-1/2" from the larger pictures.
- Fussycut four squares 4-1/8" x 4-1/8" **on point** from the smaller pictures
(It may help to cut a 4-1/8" square from template plastic, so you can center it over the design and use the template as a guide.)

Fabric B

- Cut two strips 4-1/2" x WOF, then subcut into thirty-six rectangles 1-1/2" x 4-1/2".
- Cut five strips 1-1/2" x WOF.

Fabric C

- Cut two strips 4" x WOF, then subcut into twenty-four rectangles 2" x 4".
Cut the rectangles on the diagonal to make triangles.



Fabric D

- Cut five strips 1-1/2" x WOF.


Fabric F

- Cut three strips 1-1/2" x WOF.
- Cut three strips 4" x WOF, then subcut into forty-eight rectangles 2" x 4".
Cut the rectangles on the diagonal to make triangles. *(These amounts are based on Kona solids which are the same front and back. You will need to cut twice as many rectangles if you choose a fabric that has a front and back)*



Fabric G

- Cut five strips 1-1/2" x WOF.
- Cut one square 4-1/8" x 4-1/8".
- Cut two squares 3-1/2" x 3-1/2" and then cut on the diagonal to make two triangles for each block.
- Cut one square 6-1/4" x 6-1/4", then cut **twice** on the diagonal to make four triangles.



Fabric H

- Cut two strips 4-1/2" x WOF, then sub cut into thirty-six rectangles 1-1/2" x 4-1/2".
- Cut eight strips 1-1/2" x WOF.
- Cut two strips 4" x WOF, then subcut into twenty-four rectangles 2" x 4". Cut the rectangles on the diagonal to make triangles.




Fabric I

- Cut five strips 1-1/2" x WOF and sub cut one strip into four strips 1-1/2" x 10".

Assembly Instructions


1. Paper-piece and assemble Block 1

- Using the Fabric B and Fabric H 1-1/2" x 4-1/2" rectangles, paper-piece eighteen Template 1 squares.
- Trim squares along seam allowance line and remove papers.
- Sew squares together, as pictured, to make two blocks.
- Finished blocks should measure 10-1/2" x 10-1/2".

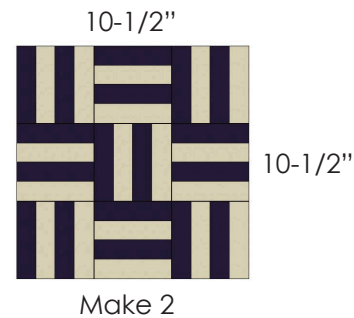


2. Paper-piece Templates 2 and 3

- Using the Fabric F and H triangles, paper-piece twelve copies of Template 2.
- Trim fabric to seam allowance line and remove papers.
- Using the Fabric C and F triangles, paper-piece twelve copies of Template 3.
- Trim fabric to seam allowance line and remove papers.
- Sew Template 2 to Template 3. Repeat to make twelve units.

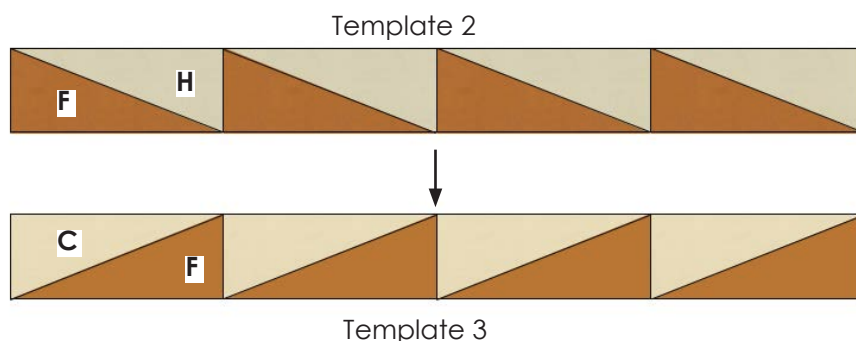

3. Assemble the Sashing Blocks


- Sew a Fabric F 1-1/2" x WOF strip lengthwise to a Fabric H 1-1/2" x WOF strip. Repeat to make three strip sets.
- Cut the strip sets into twelve 3" x 10-1/2" lengths.
- Sew a strip set to the bottom of a unit you made in Step 2. Repeat to make twelve sashing blocks.

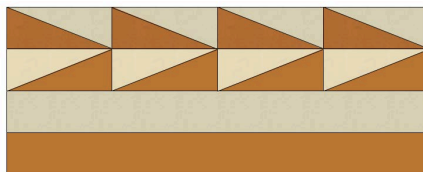

Sashing Block: Make 12

4. Make Sashing Strip Sets



- Sew Fabric B, D, G and H 1-1/2" x WOF strips together lengthwise. Repeat to make five strip sets.

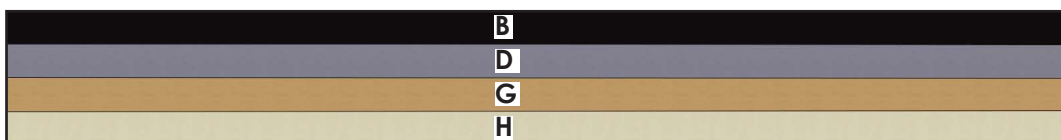

- From three strip sets, cut a total of twelve rectangles 4-1/2" x 10-1/2".
- From the remaining two strip sets, cut a total of sixteen squares 4-1/2" x 4-1/2".


5. Make the Center Block

- Sew two larger Fabric F triangles to either side of a Fabric A 4" x 4" square. Repeat to make a second set, making sure that the Fabric A square is oriented in the correct direction.
- Sew a fabric A 4" x 4" square to either side of a Fabric F 4" x 4" square.
- Sew the units together as pictured.




- Sew a smaller Fabric F triangle to each corner to complete the block.

- Trim block to 10-1/2" x 10-1/2"

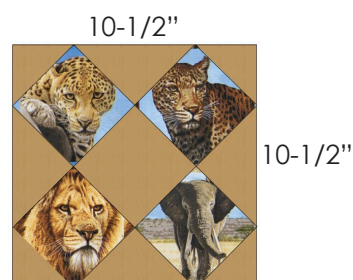

6. Assemble the Quilt Top

- Follow the assembly diagram to sew the blocks into rows and then sew the rows together to finish the quilt top.

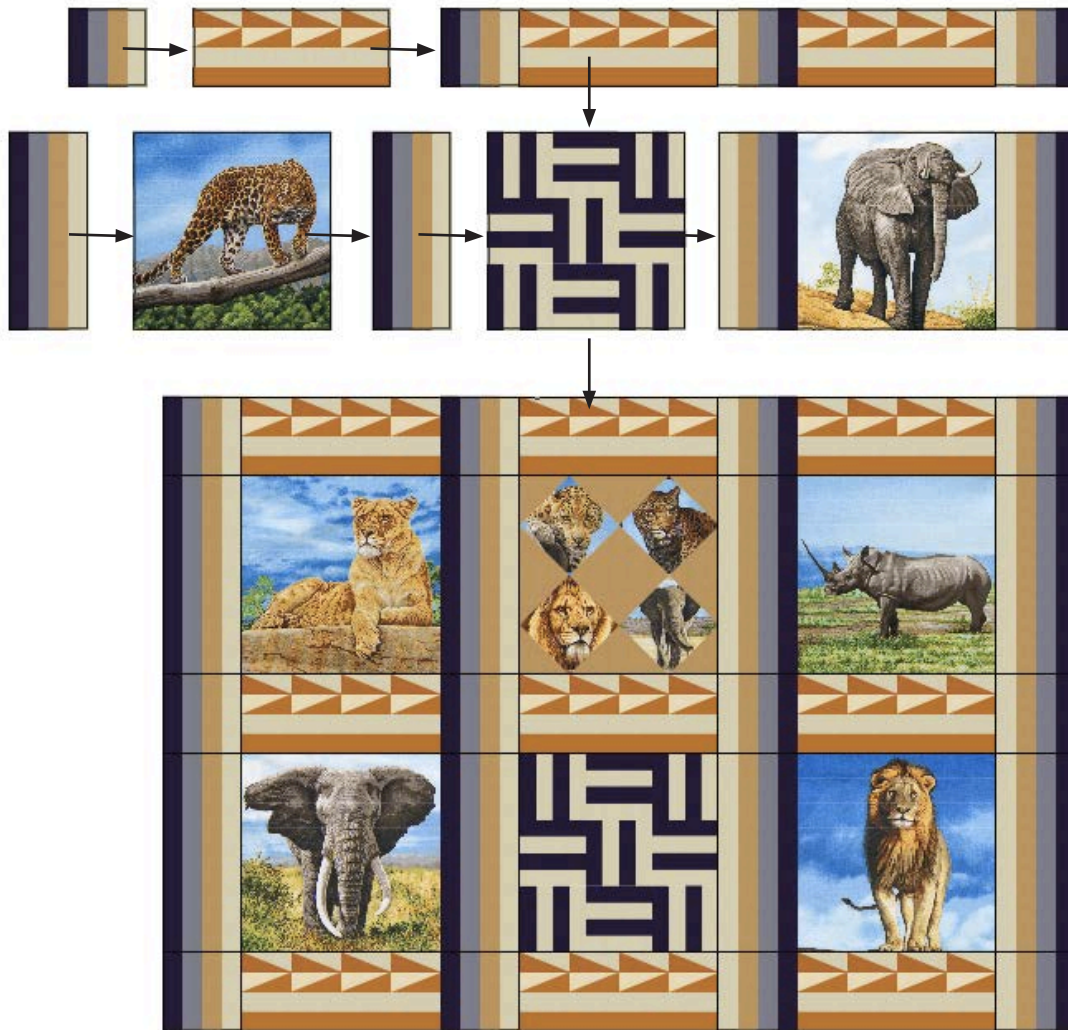

7. Attach the Borders

- Sew a Fabric I 1-1/2" x 10-1/2" strip to a short side of each Fabric I 1-1/2" x WOF strip to make four border strips.
- Sew a border strip to the top and bottom of the quilt top and trim excess.
- Sew the remaining two strips to the sides of the quilt top and trim excess.



Your quilt top is complete! Baste, quilt, bind & enjoy.

Expedition:Template 1

Expedition: Template 1

1	2	3	4
---	---	---	---

Expedition: Template 1

1	2	3	4
---	---	---	---

Expedition: Template 1

1	2	3	4
---	---	---	---

Expedition: Template 1

1	2	3	4
---	---	---	---

Expedition: Templates 2 and 3

