WEATHER VANE

Designed by Darlene Zimmerman www.feedsacklady.com

Teaturing Danlene Jimmehman

Morningside Farm



Finished project measures: 66" x 76"

Pattern Level: Experienced Intermediate

"I know the ropes and would like to test my skills!"



Fabric and Supplies Needed

Fabric amounts based on yardage that is 40" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	ADZ 15879-3 RED	3/4 yard		J	ADZ-15881-3 RED	fat quarter
	В	ADZ-15879-73 LAKE	3/4 yard		K	ADZ-15881-73 LAKE	fat quarter
	C	ADZ 15879-36 ALOE	7/8 yard		L	ADZ-15881-140 SCREAMIN' YELLOW	fat quarter
	D	ADZ-15878-5 YELLOW	fat quarter		М	ADZ-15882-3 RED	fat quarter
	E	ADZ-15878-36 ALOE	fat quarter		Ν	ADZ-15882-80 EVENING	fat quarter
	F	ADZ-15878-73 LAKE	fat quarter		0	ADZ-15882-140 SCREAMIN' YELLOW	fat quarter
	G	ADZ-15880-36 ALOE	fat quarter		Р	ADZ-15883-3 RED	fat quarter
	Н	ADZ-15880-80 EVENING	fat quarter	* # # # # # # # # # # # # # # # # # # #	Q	ADZ-15883-5 YELLOW	fat quarter
	I	ADZ-15880-140 SCREAMIN' YELLOW	fat quarter	* *	R	ADZ-15883-73 LAKE	fat quarter

Fabric and Supplies Needed

Fabric amounts based on yardage that is 40" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage	
. #	S	ADZ-15880-3 RED	3/4 yard		U	ADZ 15878-3 RED	1/2 yard	
	Т	ADZ 15877-200 VINTAGE	2-3/4 yards	You will also need: 4 yards for backing Required Tool: Easy Angle (EZ Quilting #8823759A)				
				Copyright 2015, Robert Kaufman				

Notes Before You Begin

For individual use only - Not for resale

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 40" wide.
- Right sides together has been abbreviated to RST
- Remember to measure twice and cut once!

Cutting Instructions

From each of Fabrics A and B, cut:

six 2" x WOF strips. Subcut:
one hundred twenty 2" squares
six 2" x WOF strips. Subcut:
one hundred eighty 2" Easy Angle triangles

From Fabric C. cut:

thirteen 2" x WOF strips. Subcut: forty-nine 2" x 9-1/2" sashing strips

From each of Fabrics D-R, cut:

two 3-1/2" x 21" strips. Subcut: ten 3-1/2" squares two 2" x 21" strips. Subcut: eight 2" squares sixteen Easy Angle triangles

From Fabric S, cut:

five 2" x WOF strips. Subcut:

twenty 2" squares for cornerstones one hundred-twenty 2" Easy Angle triangles six 2" x WOF strips for the inner border

From Fabric T, cut:


three 6-1/2" x WOF strips for the top and bottom borders two 6-1/2" x 78" strips, cut lengthwise, for side borders


From Fabric U, cut:

seven 2-1/4" x WOF strips for binding

Assembling the Blocks


Step 1 Place the Fabric S and the Fabric A triangles right sides together and sew on the diagonal edge. Press toward the red triangle. Make sixty. At this point the squares should measure 2". Sew an additional sixty triangle-squares using Fabric S and Fabric B triangles.






Step 2 Using the remaining Fabric A and B triangles and the print triangles cut from Fabrics D-R, sew sixteen triangle squares from each of the fifteen prints. Press toward the darker print. The triangle-squares should measure 2".







Step 3 Sew eight corner units using two of the units from Step 2, one unit from Step 1 and a matching 2" print square. Repeat to make one hundred twenty units. Press. At this point the units should measure 3-1/2" square.

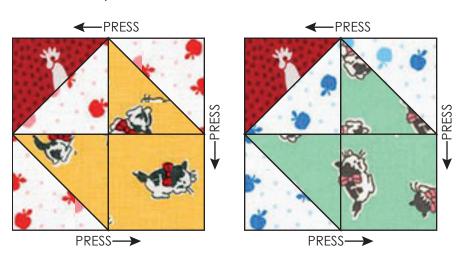


Step 4 Choose four identical corner units from Step 3 and four contrasting 3-1/2" squares to make a block. Using the 2" apple print squares that match the corner units, place one square on the corner of the contrasting 3-1/2" square. Sew on the diagonal, trim the seam allowance to 1/4" and press toward the apple print triangle. Repeat on an adjacent corner. Repeat to make four identical units.

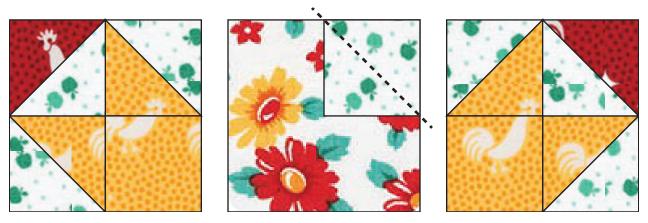


Step 5 Using the Step 3 and 4 units, and a 3-1/2" square to match the corners, assemble a block. Press as shown. The block should measure 9-1/2" at this point. Repeat to make a total of thirty blocks; fifteen with the Fabric A background and fifteen with the Fabric B background.

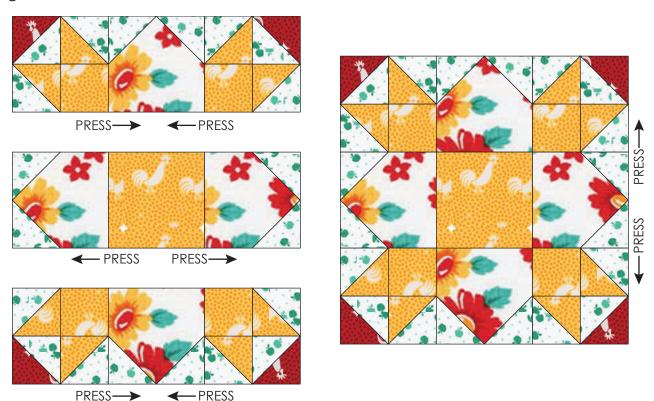

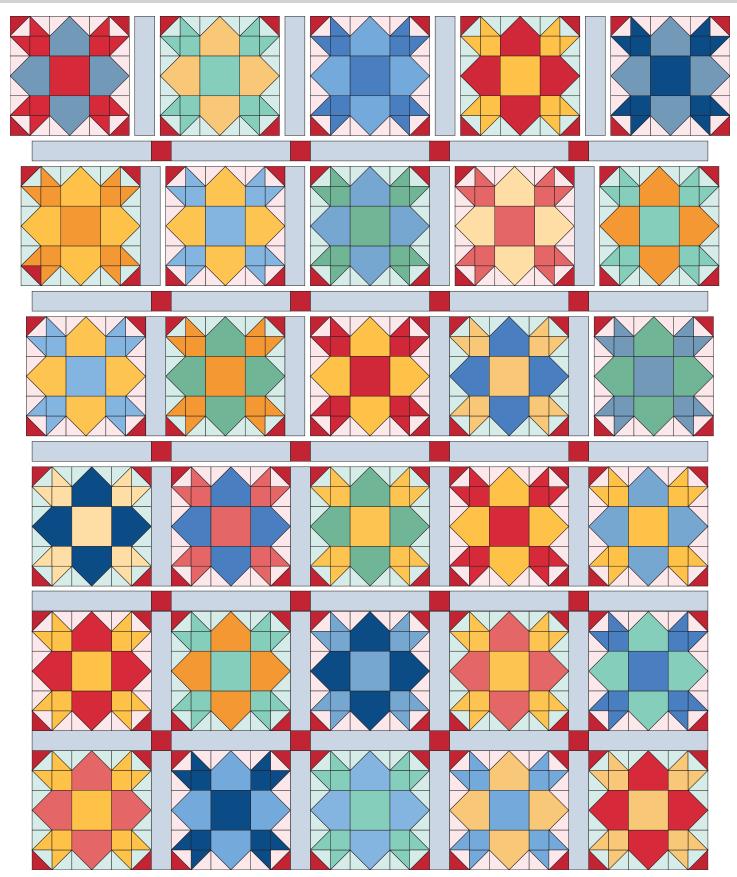

Step 1 Arrange the blocks in six rows of five blocks. Sew the 2" x 9-1/2" sashings between the blocks in each row. Press toward the sashing.

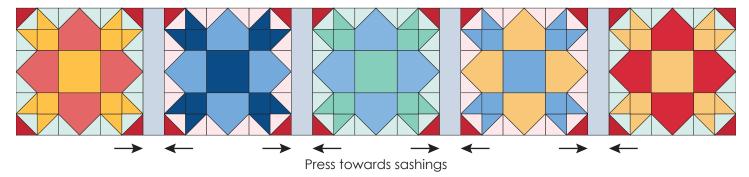

Step 2 Sew five sashing strips and four cornerstones end to end to make a horizontal sashing row. Make five rows. Press toward the sashing strips.



Step 3 Sew the block rows and horizontal sashing rows together to complete the quilt top. Press toward the horizontal sashing rows.

Adding the Borders

Step 1 Piece, measure and trim two 2" borders the width of the quilt. Sew to the top and bottom of the quilt top, pressing toward the borders.

Step 2 Piece, measure and trim two 2" borders the length of the quilt. Sew to the sides of the quilt, pressing toward the borders.

Step 3 Repeat this procedure for the barn panel outer borders. Press toward the borders.

Finishing the Quilt

Step 1 Layer, baste and quilt as desired.

Step 2 Before binding, hand or machine baste a scant 1/4" from the edge of the quilt to keep the layers from shifting.

Step 3 Sew the binding strips together with diagonal seams pressed open. Fold the binding in half, wrong sides together and press to make a double binding. Sew the binding to the quilt with a $\frac{1}{4}$ " seam allowance, mitering the corners.

Step 4 Add a label to the back of your quilt!