


AMERICANA

Designed by Robert Kaufman Fabrics
www.robertkaufman.com

Featuring **Petite Foulard**
& **Bandana**

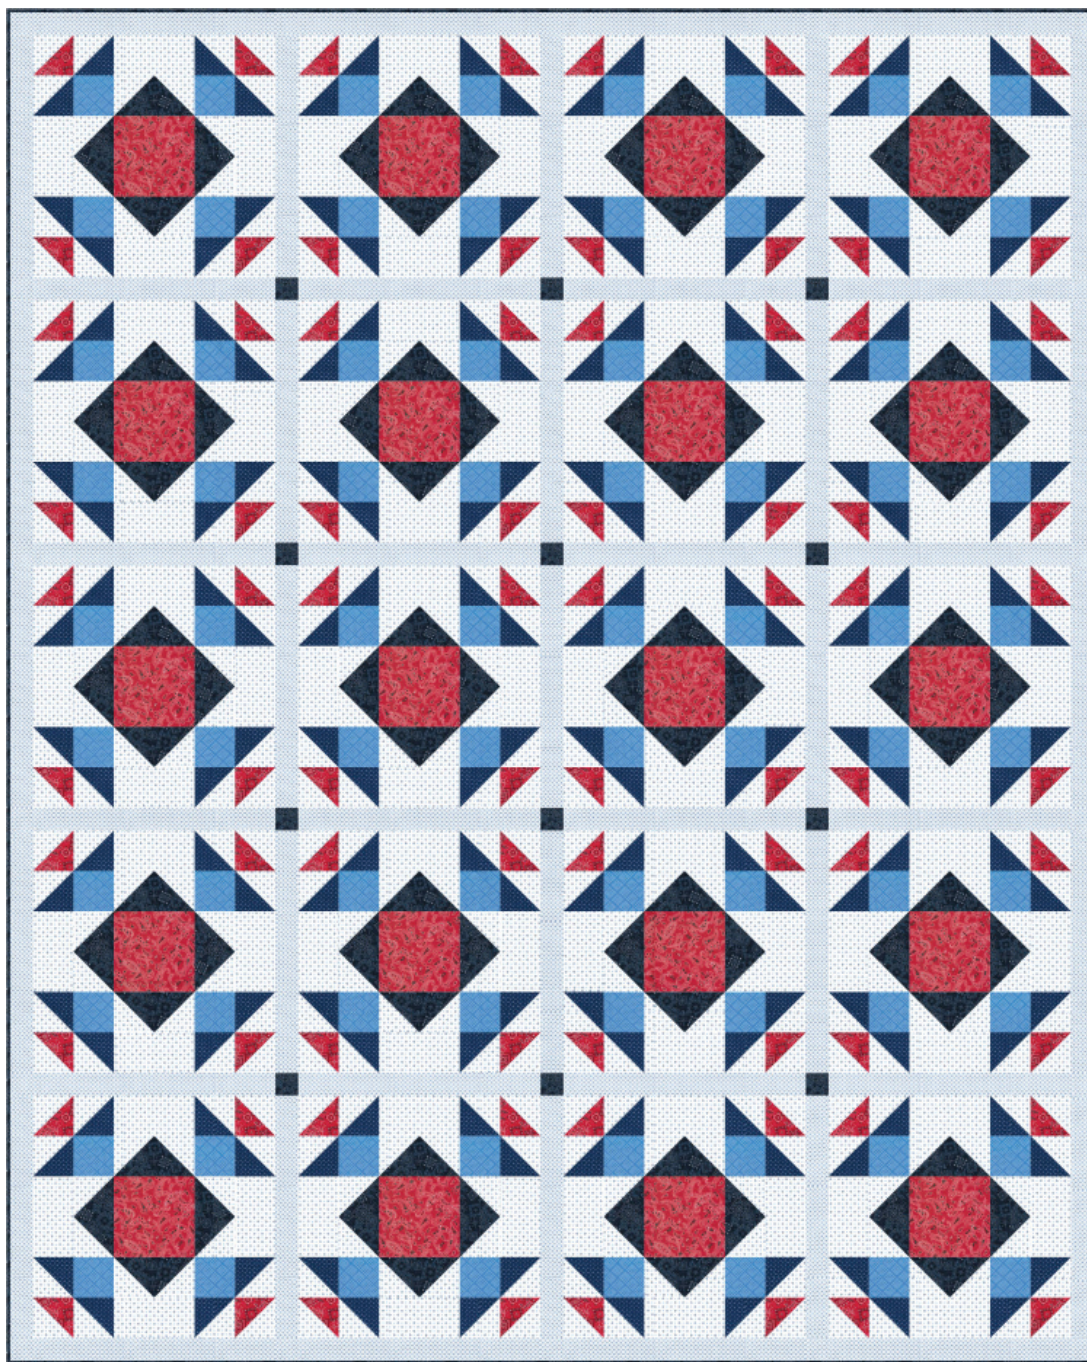

Finished quilt measures: 68" x 84-1/2"

Pattern Level: Enthusiastic Novice

"I am a total beginner and want to learn more!"

ROBERT KAUFMAN
F A B R I C S

For questions about this pattern, please email Patterns@RobertKaufman.com.

Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	SB-82052D10-1 BLUE	3 yards		E	SB-82052D2-4 NAVY	7/8 yard
	B	SB-83004D2-5 RED	3/4 yard		F	SB-83004D3-5 RED	1/2 yard
	C	SB-82052D11-2 SKY	5/8 yard		G	SB-82052D2-1 BLUE	1-1/2 yards
	D	SB-83004D3-6 NAVY * includes binding	1-3/8 yard	<div>You will also need: 5-1/4 yards for backing</div>			
Copyright 2016, Robert Kaufman For individual use only - Not for resale							

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

Note: This quilt uses two time saving construction methods. You will make all half-square triangles eight at a time and all flying geese units four at a time, so do not be alarmed if the cut sizes seem too large for the final block.

From Fabric A, cut:

twelve 2-1/2" x WOF strips. Subcut:
 eighty 2-1/2" x 5-1/2" rectangles
seven 3-3/8" x WOF strips. Subcut:
 eighty 3-3/8" squares for the flying geese units
five 7" x WOF strips. Subcut:
 thirty 7" squares for the half-square triangle blocks

From Fabric B, cut:

three 5-1/2" x WOF strips. Subcut:
 twenty 5-1/2" squares

From Fabric C, cut:

six 3" x WOF strips. Subcut:
 eighty 3" squares

From Fabric D, cut:

one 2" x WOF strip. Subcut:
 twelve 2" squares
four 6-1/4" x WOF strips. Subcut:
 twenty 6-1/4" squares for the flying geese units
eight 2-1/2" x WOF strips

From Fabric E, cut:

four 7" x WOF strips. Subcut:
 twenty 7" squares for the half-square triangle blocks

From Fabric F, cut:


two 7" x WOF strips. Subcut:
 ten 7" squares for the half-square triangle blocks

From Fabric G, cut:



twenty-two 2" x WOF strips. Subcut:
 From fourteen of the strips, cut:
 twenty-seven 2" x 15-1/2" block sashing strips
 Sew the remaining strips together, end-to-end, and trim to yield:
 two 2" x 65" top and bottom sashing strips
 two 2" x 84-1/2" side sashing strips

Assemble the Flying Geese Units

Step 1: Pin two 3-3/8" Fabric A squares in opposing corners of a Fabric D square, RST. The squares will overlap slightly in the center of the large square. Using a ruler, draw a diagonal line through the squares. Repeat with remaining blocks.

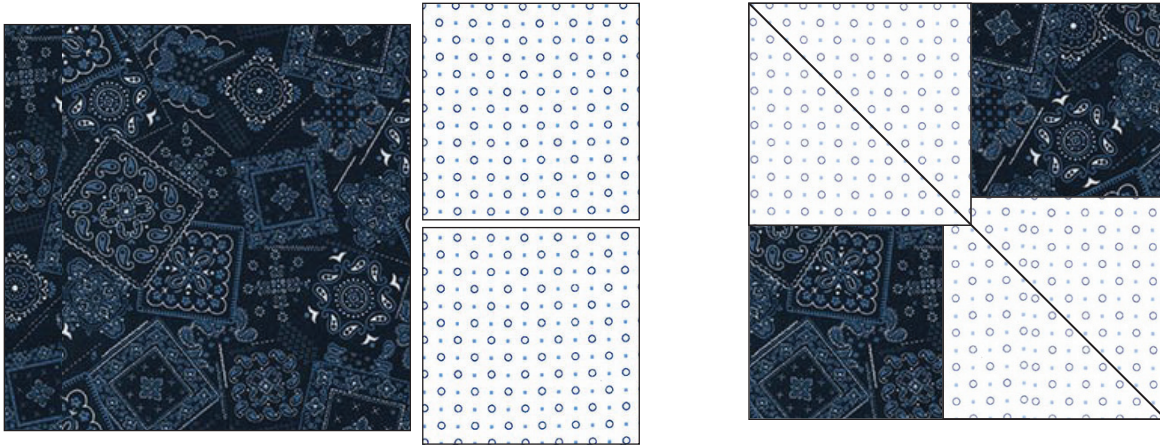


Step 2: Sew scant 1/4" seam on each side of the diagonal line. Set the seam by pressing it flat. Cut along the diagonal line.

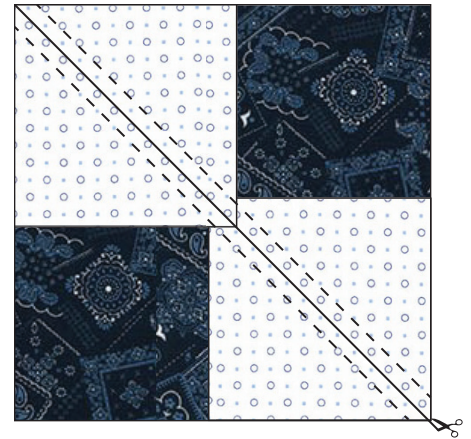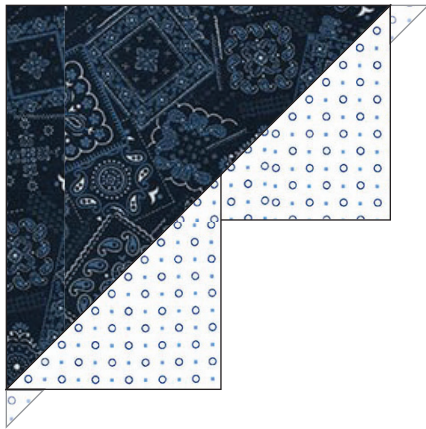


Step 3: Iron fabric toward smaller triangles. Repeat with the second unit.

Step 4: Place one 3-3/8" Fabric A square at the corner of sewn block unit. Draw diagonal line in pencil. Sew a scant 1/4" seam on each side of diagonal line. Set seam (press). Cut along diagonal line.


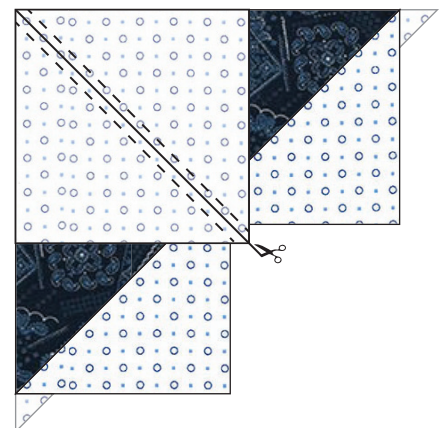


Step 5: Press the seam toward smaller triangle. Trim off small dog ears left by the seam allowance. Trim to 3" x 5-1/2" if necessary. Repeat to make four flying geese blocks. Repeat with all remaining Fabric D squares 3-3/8" Fabric A squares to make a total of eighty flying geese blocks.

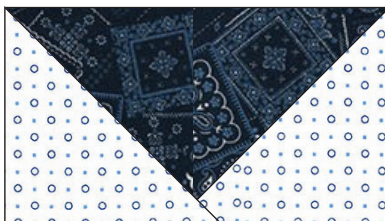


Assemble the Half Square Triangle Units

Step 6: On the wrong side of each Fabric A square, mark both diagonals with a pencil.

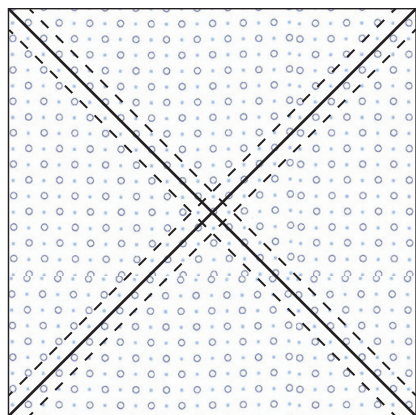
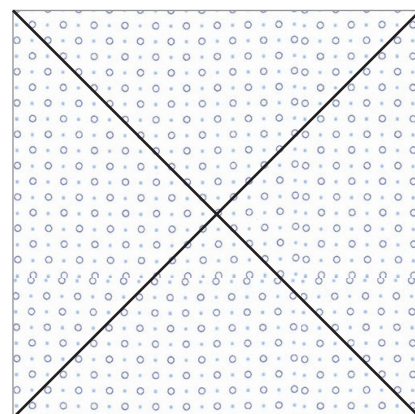


Step 7: Place one 7" Fabric A square RST with a 7" Fabric E square. Sew 1/4" away from both sides of the two marked lines.

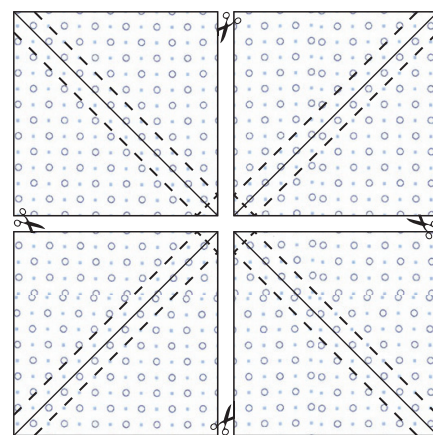


Step 8: Cut the square in half vertically and horizontally.

Step 9: Cut along the marked lines, creating eight half-square triangles (HSTs). Press toward the darker fabric. Trim to 3" square, if necessary. Repeat with all remaining 7" squares, pairing each Fabric A square with either Fabric E and F.

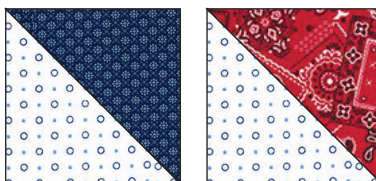

Assemble the Blocks

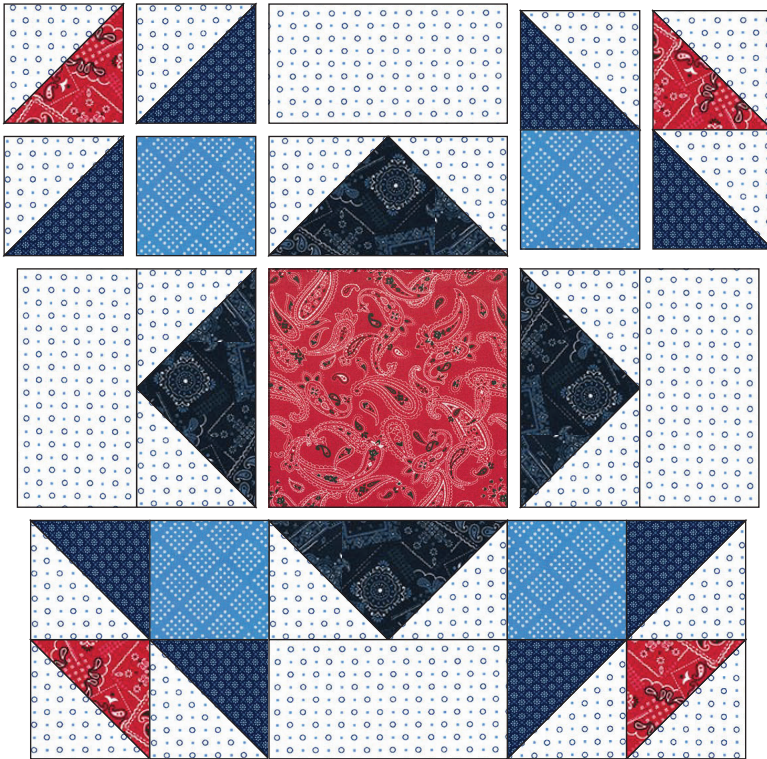

Step 10: Gather:
 one Fabric B square
 four Fabric A rectangles
 four A/F HSTs
 eight A/E HSTs
 four Fabric C squares
 four flying geese units


Step 11: Arrange as illustrated in the Block Assembly Diagram. Sew one rectangle to the top of each flying geese unit. Press toward the rectangle.

Step 12: Sew one A/F HST, two A/E HSTs and one Fabric C square together to form a four-patch unit. Press square seams toward the A/E units and press the row seam open. Repeat to make four 4-patch units for the block.

Step 13: Sew the assembled units together in three rows of three. Press the unit seams away from the flying geese units and press the row seams open. Trim the resulting block to 15-1/2" square if necessary. Repeat to make twenty blocks.

Assemble the Sashing


Step 14: Gather four blocks and three block sashing strips. Sew together, alternating strips with blocks and beginning and ending the rows with blocks. Press toward the sashing. Repeat to make five rows.

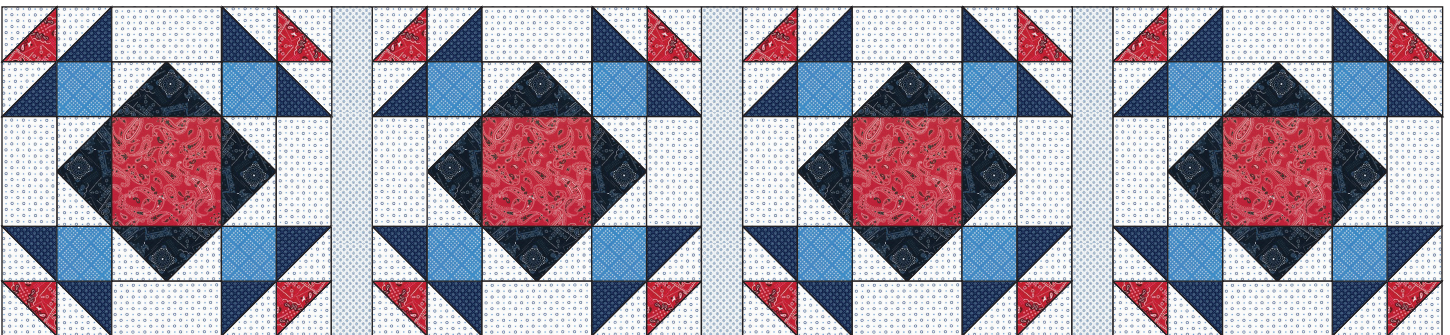

Step 15: Gather four block sashing strips and three 2" Fabric D squares. Sew together, alternating strips with squares and beginning and ending the rows with strips. Press toward the sashing. Repeat to make four pieced sashing rows.



Assemble the Quilt

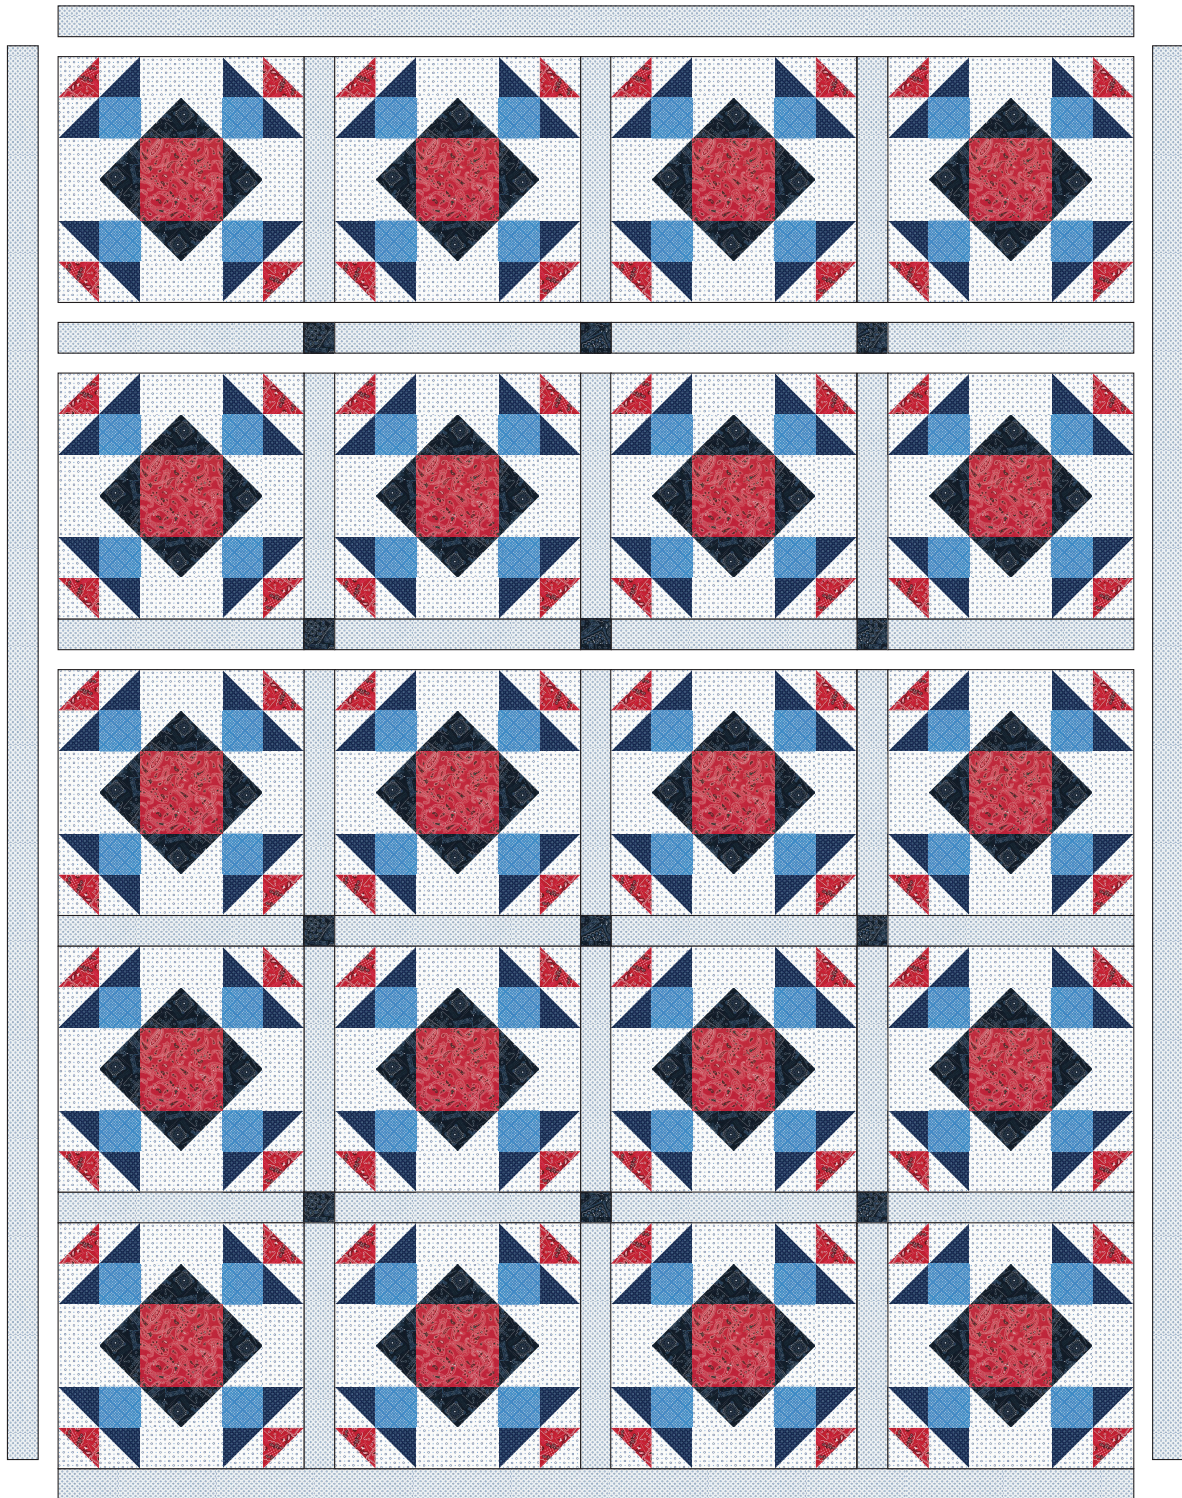

Step 16: Sew the block rows and sashing rows together as indicated in the Quilt Assembly Diagram. Sew a 65" sashing strip to the top and bottom of the quilt. Press all seams toward the sashing rows.

Step 17: Sew the side sashing strips to the sides of the quilt. Press the seams toward the sashing rows.

Your quilt top is now complete! Baste, quilt, bind and enjoy!