

CELEBRATE FALL

Designed by Elise Lea for RK
www.robertkaufman.com

Featuring ARTISAN
BATIKS

Celebrate Fall Lynn



Finished quilt measures: 46-12" x 58-1/4"







Difficulty Rating: **Intermediate**

ROBERT KAUFMAN
F A B R I C S

For questions about this pattern, please email Patterns@RobertKaufman.com.

Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
 <p>TEN-1094-42 CELEBRATE FALL</p> <p>One Ten Square Pack</p> <p>Plus additional yardage of:</p> <p>A  AMD-21126-15 IVORY 3/4 yard</p> <p>B  AMD-7000-15 IVORY 1-1/4 yard</p> <p>Copyright 2021, Robert Kaufman For individual use only - Not for resale</p>				 C AMD-21126-14 NATURAL 2/3 yard			
				 D AMD-7000-16 BROWN 1/3 yard			
				 Binding AMD-21130-179 RUST 1/2 yard			
				<p>You will also need: 3-1/4 yards for backing</p>			

Notes Before You Begin


- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

From the Ten Square Pack:

Set one print aside for the cornerstones. From this print, cut:
seven 1-1/4" x 10" strips. Subcut:
forty-nine 1-1/4" squares for the cornerstones

Select thirty-two remaining 10" squares. Each square will make one Leaf Block. Three prints will be used twice.



From each of the squares, cut:

two 3-1/2" squares

three 3" squares

From Fabric A, cut:

two 12" x WOF strips. Subcut:

four 12" squares. Cut each square along both diagonals, creating sixteen side setting triangles. Note: two triangles will not be used.

Trim the remainder of the strip to 6-5/8" wide. Subcut:

two 6-5/8" squares. Cut each square in half along one diagonal, creating four corner setting triangles.

From Fabric B, cut:

six 3-1/2" x WOF strips. Subcut:

sixty-four 3-1/2" squares for the HSTs

three 3" x WOF strips. Subcut:

thirty-two 3" squares

four 2-5/8" x WOF strips. Subcut:

sixty-four 2-5/8" squares for the stem units. Mark a diagonal line on the back of each square.

From Fabric C, cut:

sixteen 1-1/4" x WOF strips. Subcut:

eighty 1-1/4" x 8" sashing strips

From Fabric D, cut:

three 3" x WOF strips. Subcut:


thirty-two 3" squares for the stem units

From the Binding Fabric, cut:

six 2-1/2" x WOF strips

Assemble the Half-Square Triangles (HSTs)


Step 1: Pair a 3-1/2" Fabric B square with a 3-1/2" print square, RST. Mark a diagonal line on the wrong side of one square. Sew 1/4" away from both sides of the marked line. Cut on the marked line, creating two half-square triangles (HSTs). Press toward the darker fabric. Trim to 3" square. Repeat to make four HSTs in this fabric pairing.




Step 2: Repeat Step 1 to make thirty-two sets of four HSTs.

Assemble the Stem Units

Step 3: Place a 2-5/8" Fabric B square in one corner of a 3" Fabric D square, right sides together. Sew along the diagonal, as shown. Trim the excess fabric, leaving a 1/4" seam allowance. Press toward the corner. Repeat on the opposite corner, with a second 2-5/8" Fabric B square. Make thirty-two Stem Units.

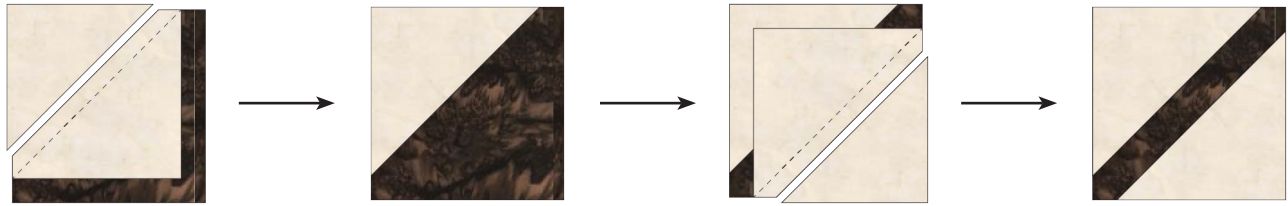

Assemble the Blocks



Step 4: Gather:
one 3" Fabric B square
three 3" matching print squares
four matching print HSTs
one Fabric D Stem Unit

Arrange the units into three rows of three. Note the fabric placement and orientation in the Block Assembly Diagram.

Step 5: Sew the pieces together to form the rows. Press the seams in opposite directions every other row.


Step 6: Sew the rows together, nesting the seams and pressing the seams to one side to form the block. The resulting Block will measure 8" square.

Step 7: Repeat Steps 4-6 to make a total of thirty-two Blocks.



Step 8: Arrange the Blocks together in diagonal rows, as indicated in the Quilt Assembly Diagram. Sew each row together, using Fabric C sashing strips between each block and at the beginning and end of each row. Press seams toward the blocks. Make six block rows, with two single blocks remaining. Sew sashing strips to the opposite sides of these blocks, as shown.

Step 9: Sew the side setting triangles to the ends of the rows, aligning the right angles together, as shown. The angled end will extend beyond the block. Press.

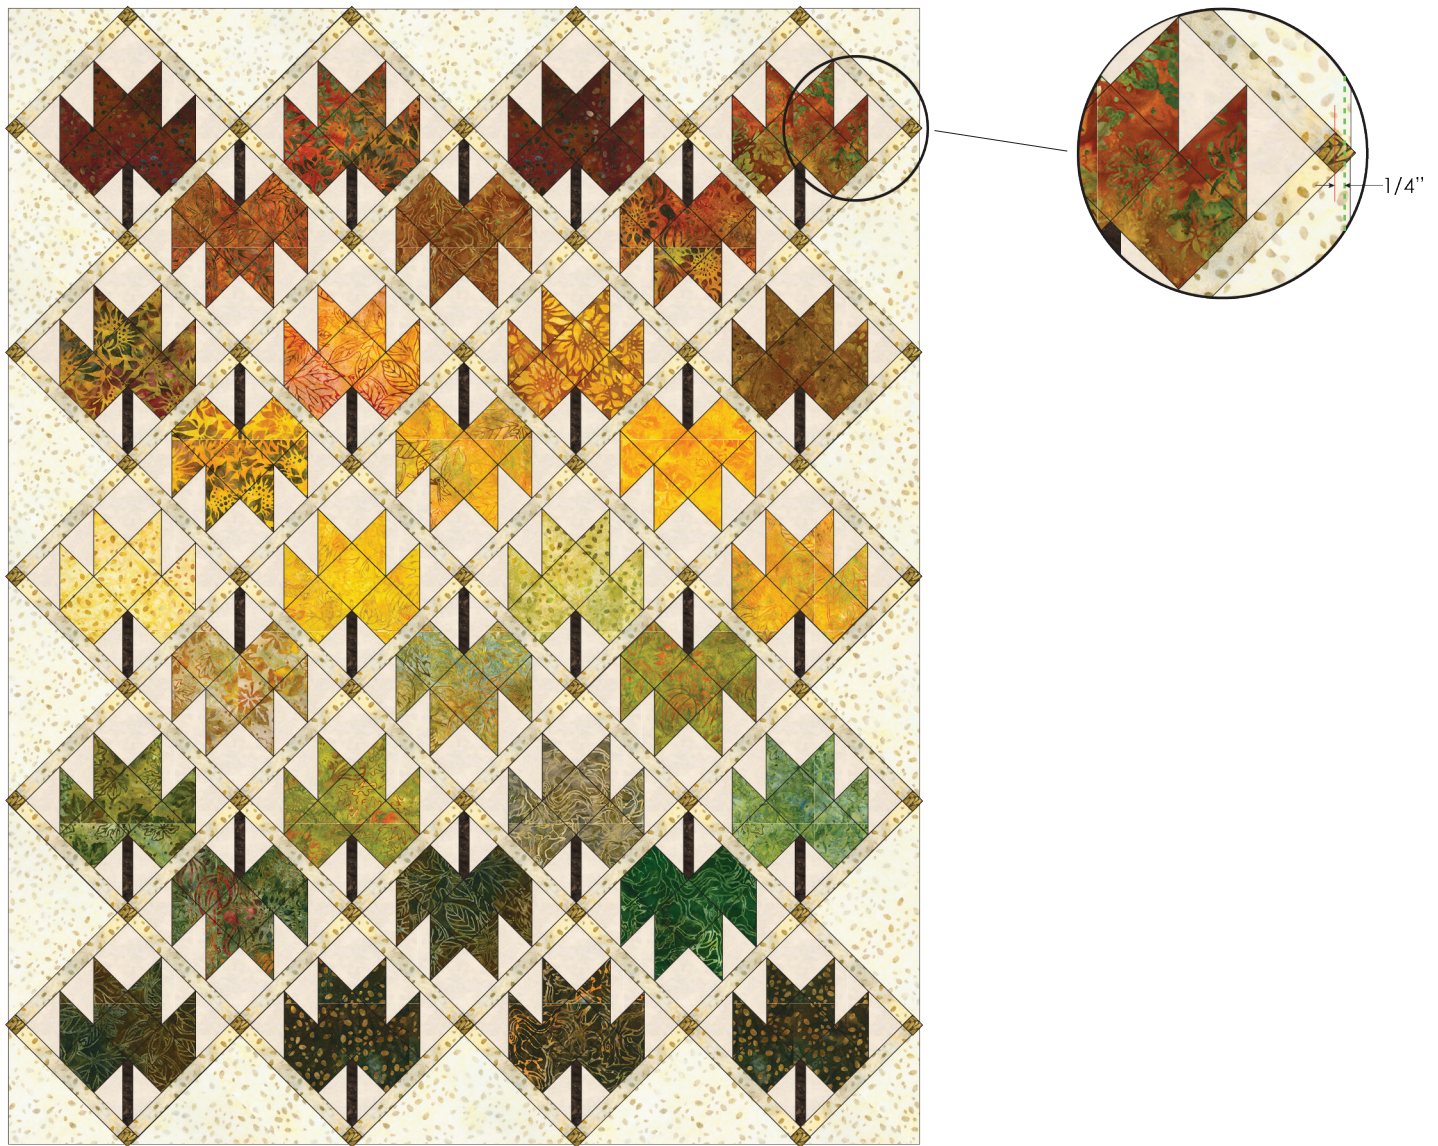

Step 10: Gather cornerstone squares and sashing strips. Following the Quilt Assembly Diagram, sew each row together, using cornerstones between each sashing strip and at the beginning and end of each row. Press seams toward the sashing. Repeat to make nine sashing rows.

Step 11: Sew the sashing and block rows together, pinning and nesting the seams. Press seams open or to the sashing.

Step 12: Sew the corner setting triangles to each of the four corners. Press.

Step 13: Trim all four sides evenly, allowing a 1/4" seam allowance from the diagonal of each cornerstone, as shown.

Your quilt top is finished! Baste, quilt, bind and enjoy!

This pattern may be used for personal purposes only and may not be reproduced in any form without the express permission from Robert Kaufman Fabrics. This pattern is not for resale. All patterns, unless otherwise attributed, are © Robert Kaufman Co., Inc. 2005-2021. All rights reserved.