Dazzling Jewels

designed by Peggy Toole for Robert Kaufman Fabrics instructions written by Heidi Pridemore





Dazzling Jewels

Quilt designed by Peggy Toole, Instructions by Heidi Pridemore Quilt approximate size 41" x 54" All border strip length measurements are approximate. Please measure your quilt top before cutting the length of each border.

Note: Starch all fabrics before cutting for easier assembly.

Fabric Requirements:	Cutting:
Fabric A (border print) 1-1/2 yards of APTM 10874-201	 See instructions to cut (5) sets of medallions using Template 1 (T-1) From the remaining fabric, cut (2) 5-1/2" x Length of Fabric (LOF) strips of similar pattern for the top and bottom borders.
Fabric B (tonal cream print) 1-3/4 yards of APTM 10875-89	 Cut (3) 5-1/8" x 42" strips. Use T-1 template to cut (34) triangles. Cut (4) 7" x 42" strips. Sub-cut the strips into (44) 3" x 7" strips for templates T-3 and T-4. Cut (4) 4" x 42". Sub-cut the strips into (48) 3" x 4" strips for template T-5.
Fabric C (garnet print) 1 yard of APTM 10875-105	 Cut (2) 2-3/4" x 18" strips for template T-2. Cut (3) 7" x 42" strips. Sub-cut the strips into (44) 2" x 7" strips for templates T-3 and T-4.
Fabric D (purple print) 1-3/4 yards of APTM 10875-20	 Cut (1) 5-1/8" x 42" strip. Sub-cut the strip into (8) triangles using template T-1. Cut (5) 7"x 42" strips. Sub-cut the strips into (44) 4" x 7" pieces for templates T-3 and T-4. Cut (2) 1-1/2" x 42" strips for the top and bottom inner borders. Cut (6)2-1/2" x 42" strips for the binding.
Fabric E (pink floral) 1-1/8 yards of APTM 10877-201	 Cut (2) 5-1/8" x 42" strips. Sub-cut the strips into (24) triangles using template T-1. Cut (4) 6" x 42" strips. Sub-cut the strips into (24) 6" squares for template T-5.
Fabric F (rust stripe) 5/8 yard of APTM 10876-201	Cut (2) 3-1/2" x LOF strips. Center each on the same printed motif using template T-2.
Backing (your choice) 3-1/2 yards	Cut (2) 49" x 42" strips. Piece the strips together to make one 49" x 68" backing.



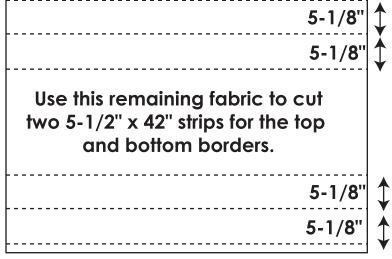


Fig. 1

Template Instructions:

- 1) Trace Template One (T-1) and Template Two (T-2), including the horizontal line, onto template plastic and cut out on the drawn lines. To check if you are accurate, each side of the triangle should measure 5-7/8" from corner to corner with 60° angles on each corner.
- 2) Copy and print (22) copies of Template Three (T-3) and Template Four (T-4) to use for paper piecing.
- 3) Copy and print (24) copies of Template Five (T-5) to use for paper piecing.

Assembly Instructions:

- 4) To cut the medallion triangles from the Fabric A, trim 1" from each selvage edge of Fabric A (see fig. 1). Cut (2) 5-1/8" x LOF strip from each salvage edge. Find one repeat point on the strip and use template T-1 to cut one triangle. Cut five more triangles using the same reference point and template T-1 for one medallion set. Repeat to cut a second medallion set from the strip. Repeat with the remaining (3) 5-1/8" border print Fabric A strips. Lay out each set (you have eight) and select the (5) best medallion sets for the quilt. Set aside these (5) medallion sets. **NOTE: See pillow pattern for other uses for the remaining medallion sets.**
- 5) Sew (1) 2-3/4" Fabric C strip to the top of (1) 3-1/2" x LOF Fabric F strip to make one strip set. Repeat to make (4) strip sets. Using Template 2, align the horizontal line on the template with the sewn seam on the strip set and cut (6) template T-2 triangles with a Fabric F strip on the wide bottom of the triangle.
- 6) Refer to the sheet for templates 3 and 4 fabric placement and use your favorite method of paper (foundation) piecing to complete (22) triangles of each template 3 and template 4. TIP: Make sure to shorten your stitch length when sewing the fabric to the paper template in order to make it easier to tear the paper away. Set aside the completed fabric triangles from templates T-3 and T-4.
- 7) Refer to the sheet for template 5 for fabric placement and use your favorite method of paper (foundation) piecing to complete (24) triangles of template 5. TIP: Shorten your stitch length when sewing the fabric to the paper template to make it easier to tear the paper away.
- 8) Refer to the quilt photo for the layout and sew together the top row of triangles. Repeat to sew together the bottom row of triangles. Trim the two end triangles on each row in half, leaving a 1/4" seam allowance. Measure the rows and trim the 1-1/2" x 42" Fabric D strips and (2) 5-1/2" x 42" Fabric A strips to make the width of the triangles rows.
- 9) Refer to the quilt photo for row orientation and sew (1) Fabric D strip & (1) Fabric A strip to each row of sewn triangles to make the top and bottom borders.
- 10) Refer to the quilt photo to layout the (8) middle rows of triangles. **NOTE: You will trim the end** triangles in half after the quilt top is sewn together. Sew the triangles together into horizontal rows. Sew the rows together to make the quilt top.
- 11) Trim the end triangles in half, leaving a 1/4" seam allowance to square up the quilt top.
- 12) Sew the top and bottom borders from Step 9 to the guilt top to complete.
- 13) Layer, quilt and bind as desired.
 - © 2011 Robert Kaufman Fabrics For Personal Use Only Not For Re-sale

Dazzling Jewels pillow

Designed by Heidi Pridemore

Pillow approximate size 24" square

All border strip length measurements are approximate. Please measure your quilt top before cutting the length of the borders.

Note: Starch all fabrics before cutting for easier assembly. Fabric Requirements: **Cutting:** Fabric A (border print) • See instructions to cut (1) set of medallions using template 1 (T-1). 1-1/2 yards of **APTM 10874-201** • From the remaining fabric, cut (2) 16-1/2" x 20-1/2" strips for the pillow backing. Fabric B (cream print) • Cut (1) 7" x 42" strip. Sub-cut the strip into (12) 3" x 7" strips for 3/8 yard of **APTM 10875-89** templates T-3 and T-4. • Cut (1) 4" x 42" strip. Sub-cut the strip into (12) 3" x 4" strips for use in template T-5. • Cut (1) 7" x 42" strip. Sub-cut the strip into (12) 2" x 7" strips for use Fabric C (garnet print) 1/4 yard of **APTM 10875-105** in templates T-3 and T-4. Fabric D (purple print) • Cut (1) 7"x 42" strip. Sub-cut the strip into (12) 4" x 7" for use in 1/4 yard of **APTM 10875-20** templates T-3 and T-4.

template T-1.

Template Instructions:

Fabric E (pink floral)

1/2 yard of **APTM 10877-201**

- 1) Trace Template One (T-1) onto template plastic and cut out on the drawn lines. To check if you are accurate each side of the triangle should measure 5-7/8" from corner to corner with 60° angles in each corner.
- 2) Copy and print (6) copies of each template 3(T-3) and template 4(T-4) to use for paper piecing.
- 3) Copy and print six copies of Template 5 (T-5) to use for paper piecing.

Selvage Edge 5-1/8"

Use this remaining fabric to cut two 16-1/2" x 20-1/2" pieces for backing panels.


Fig. 1


• Cut (2) 5-1/8" x 42" strips. Sub-cut the strips into (18) triangles using


• Cut (2) 2" x 20-1/2" strips for the top and bottom borders.

Assembly Instructions:

- 4) To cut the medallion triangles from Fabric A, trim 1" from one selvage edge of the Fabric A (**fig. 1**). Cut (1) 5-1/8" x LOF strip from the trimmed salvage edge. Find (1) repeat point on the strip, use T-1 to cut (1) triangle. Cut (5) more triangles using the same reference point and T-1 for (1) medallion set. Set aside.
- 5) Refer to the Template 3 and 4 sheet for fabric placement and use your favorite method of paper (foundation) piecing to complete (6) triangles of each Template 3 and Template 4. **TIP: Make sure to shorten your stitch length when sewing the fabric to the paper template in order to make it easier to tear the paper away.** Set aside the completed T-3 and T-4.
- 6) Refer to Template 5 for fabric placement and use your favorite method of paper (foundation) piecing to complete (6) triangles of Template 5. TIP: Make sure to shorten your stitch length when sewing the fabric to the paper template to make it easier to tear the paper away.
- 7) Refer to the pillow photo to lay out and sew together the triangles to make the horizontal rows. Sew the rows together to make the pillow top. Trim the end triangles in half, leaving a 1/4" seam allowance after the rows are sewn together to make the pillow top.
- 8) Sew (1) 2" \times 20-1/2" Fabric E strip to the top and bottom of the pillow top. trim the pillow top to measure 20-1/2" square.
- 9) To make the pillow back panels, fold over the 20-1/2" side on the 16-1/2" x 20-1/2" Fabric A panel by a 1/4" twice and top stitch in place. Repeat with the second 16-1/2" x 20-1/2" Fabric A panel.
- 10) Place the pillow front and two back panels, right sides together, overlapping the two back panels, and pin in place. Use a 1/4" seam allowance to sew the back panels and pillow front together.
- 11) Turn the completed pillow right side out and insert the 20" pillow form.

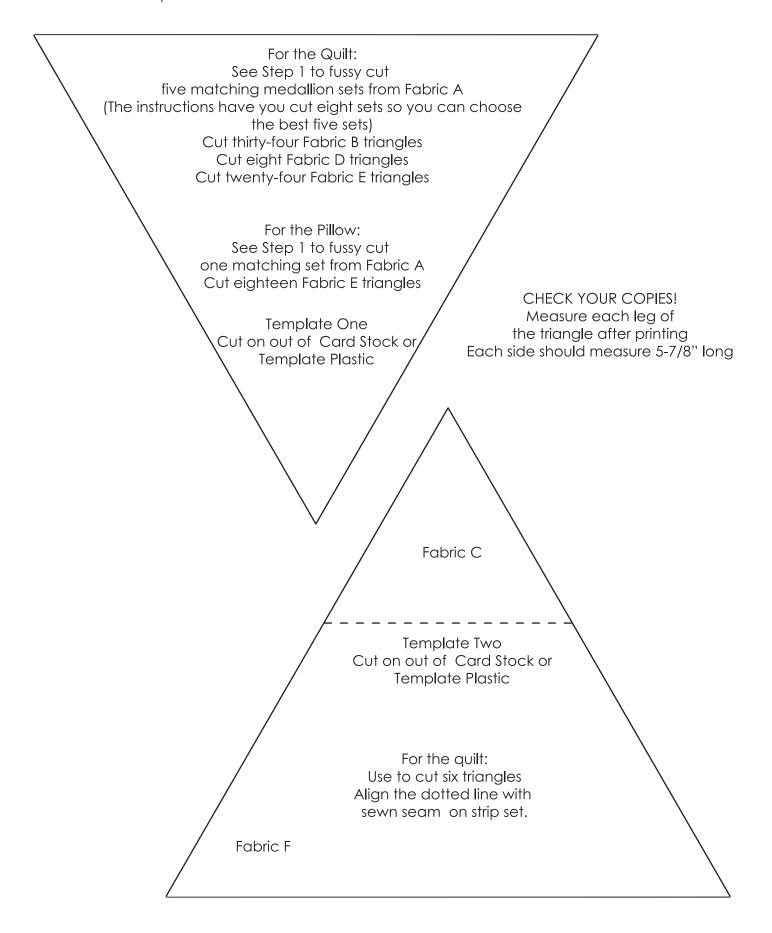

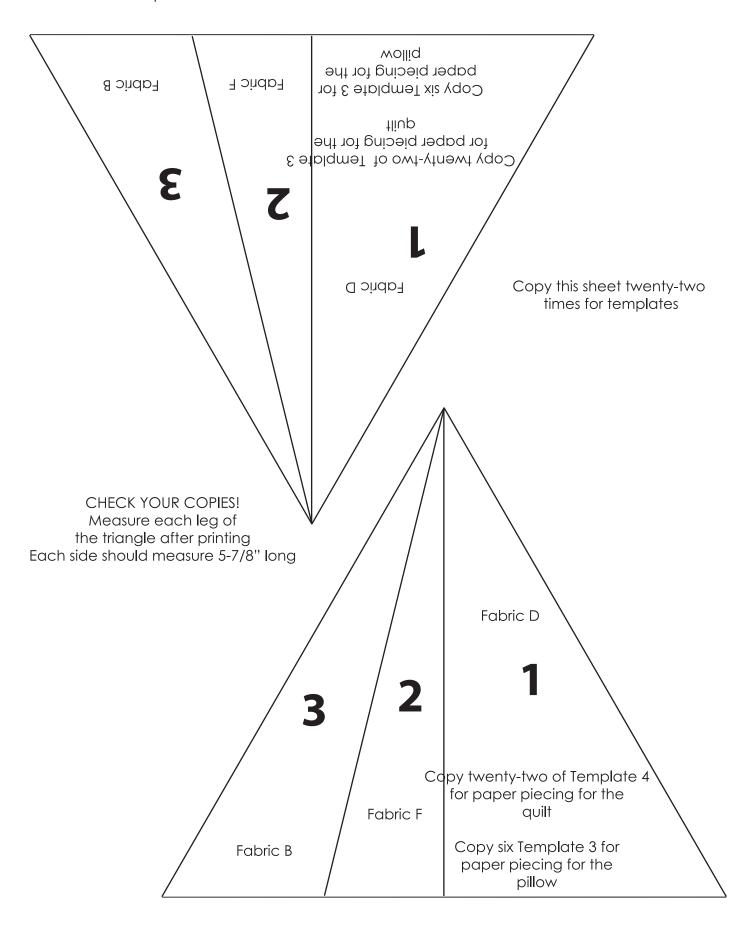

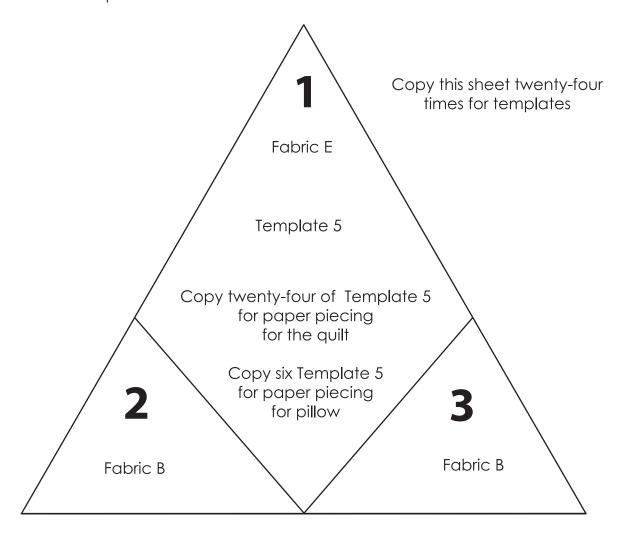

CHECK YOUR COPIES!

Measure each leg of
the triangle after printing
Each side should measure 5-7/8" long