


DISCO

Designed by Ariga Wilson for RK
www.robertkaufman.com

Featuring *pearl light*

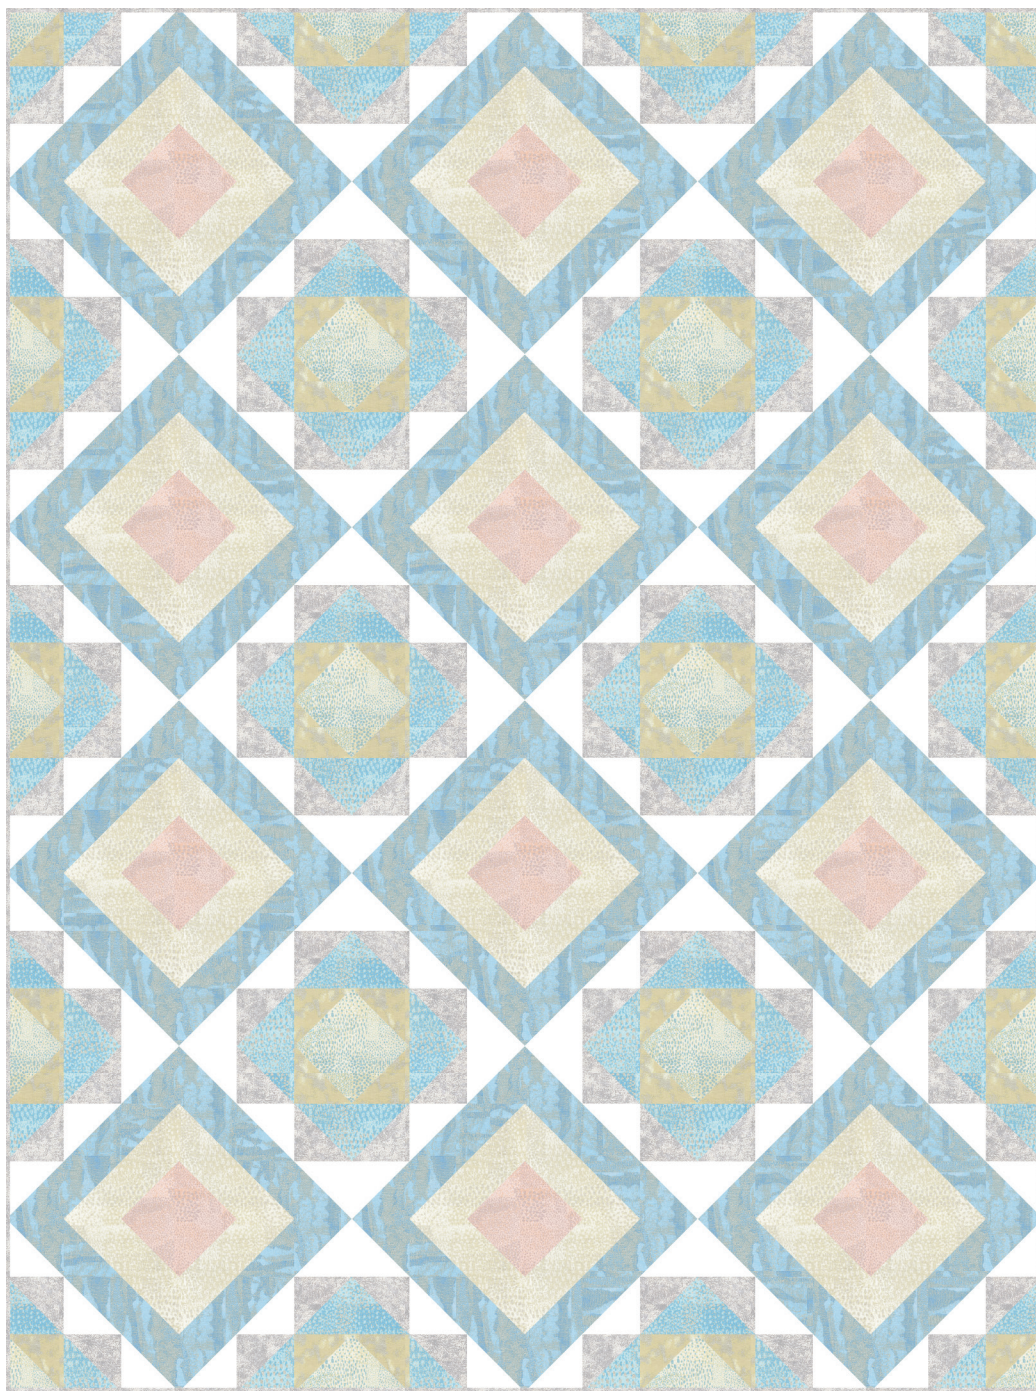

Finished quilt measures: 54" x 72"




Difficulty Rating: **Beginner**

ROBERTKAUFMAN
F A B R I C S

For questions about this pattern, please email Patterns@RobertKaufman.com.

Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	SRKP-20286-362 ICE PEACH	1/2 yard		F	SRKP-20284-15 IVORY	3/8 yard
	B	SRKP-20286-15 IVORY	1 yard		G	SRKP-20286-63 SKY	2/3 yard
	C	SRKP-20285-63 SKY	1-1/2 yard		H	SRKP-20287-290 ASH	3/4 yard
	D	K001-1387 WHITE	1 yard		Binding*	SRKP-20287-290 ASH	1/2 yard
	E	SRKP-20286-245 MIST	3/8 yard				<i>*Also used for Fabric H</i>
Copyright 2021, Robert Kaufman For individual use only - Not for resale				You will also need: 3-1/2 yards for backing			

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

From Fabric A, cut:

two 7-1/4" x WOF strips. Subcut:
six 7-1/4" squares for the Flying Geese

From Fabric B, cut:

three 7-1/4" x WOF strips. Subcut:
twelve 7-1/4" squares for the Flying Geese
three 3-7/8" x WOF strips. Subcut:
twenty-four 3-7/8" squares for the Flying Geese

From Fabric C, cut:

three 7-1/4" x WOF strips. Subcut:
twelve 7-1/4" squares for the Flying Geese
three 4" x WOF strips. Subcut:
twenty-four 4" squares for the HSTs
five 3-7/8" x WOF strips. Subcut:
forty-eight 3-7/8" squares for the Flying Geese

From Fabric D, cut:

three 4" x WOF strips. Subcut:
twenty-four 4" squares for the HSTs
five 3-7/8" x WOF strips. Subcut:
forty-eight 3-7/8" squares for the Flying Geese

From each of Fabrics E and F, cut:

three 4" x WOF strips. Subcut:
twenty-four 4" squares for the HSTs

From Fabric G, cut:

two 7-1/4" x WOF strips. Subcut:
nine 7-1/4" squares for the Flying Geese
two 4" x WOF strips. Subcut:
fourteen 4" squares for the HSTs

From Fabric H, cut:


two 4" x WOF strips. Subcut:
fourteen 4" squares for the HSTs
four 3-7/8" x WOF strips. Subcut:
thirty-six 3-7/8" squares for the Flying Geese

From the Binding Fabric, cut:


seven 2-1/2" x WOF strips

Assemble the Flying Geese


Step 1: Pin two 3-7/8" Fabric B squares in opposing corners of a 7-1/4" Fabric A square, RST. The squares will overlap slightly in the center of the large square. Using a ruler, draw a diagonal line through the squares.




Step 2: Sew scant 1/4" seam on each side of the diagonal line. Set the seam by pressing it flat. Cut along the diagonal line, creating two identical units.




Step 3: Press the fabric toward smaller triangles. Repeat with the second unit.



Step 4: Place one 3-7/8" Fabric B square at the corner of sewn block unit. Draw diagonal line in pencil. Sew a scant 1/4" seam on each side of diagonal line. Set seam (press). Cut along diagonal line, creating two identical units.




Step 5: Press the seam toward smaller triangle. Trim off small dog ears left by the seam allowance. Trim to 3-1/2" x 6-1/2" if necessary. Repeat to make four flying geese blocks.



Step 6: Repeat with all remaining 3-7/8" Fabric B squares and 7-1/4" Fabric A squares to make a total of twenty-four A/B flying geese blocks.


Step 7: Repeat the process in Steps 1-5 to make a total:



forty-eight B/C flying geese blocks




forty-eight C/D flying geese blocks




thirty-six G/H flying geese blocks (two will not be used)

Assemble the Half-Square Triangles (HSTs)


Step 8: Pair a 4" Fabric C square with a Fabric D square, RST. Mark a diagonal line on the wrong side of one square. Sew 1/4" away from both sides of the marked line. Cut on the marked line, creating two half-square triangles (HSTs). Press toward the darker fabric. Trim to 3-1/2" square. Repeat to make forty-eight C/D HSTs.



Step 9: Repeat Step 8 to make:




forty-eight E/F HSTs



twenty-eight G/H HSTs

Assemble the Quilt


Step 10: Arrange the units to form Row A. Note the fabric placement and block orientation in the Quilt Assembly Diagram. Sew together to form the Row. Do not press the seams yet. Repeat to make two of Row A.




Step 11: Arrange the units to form Row B. Note the fabric placement and block orientation in the Quilt Assembly Diagram. Sew together to form the Row. Do not press the seams yet. Repeat to make eight of Row B.




Step 12: Arrange the units to form Row C. Note the fabric placement and block orientation in the Quilt Assembly Diagram. Sew together to form the Row. Do not press the seams yet. Repeat to make four of Row C.



Step 13: Arrange the units to form Row D. Note the fabric placement and block orientation in the Quilt Assembly Diagram. Sew together to form the Row. Do not press the seams yet. Repeat to make three of Row D.



Step 14: Arrange Rows A-D together, following the Quilt Assembly Diagram. Note the orientation of each row. Press each row, pressing the unit seams in opposite directions every other row.

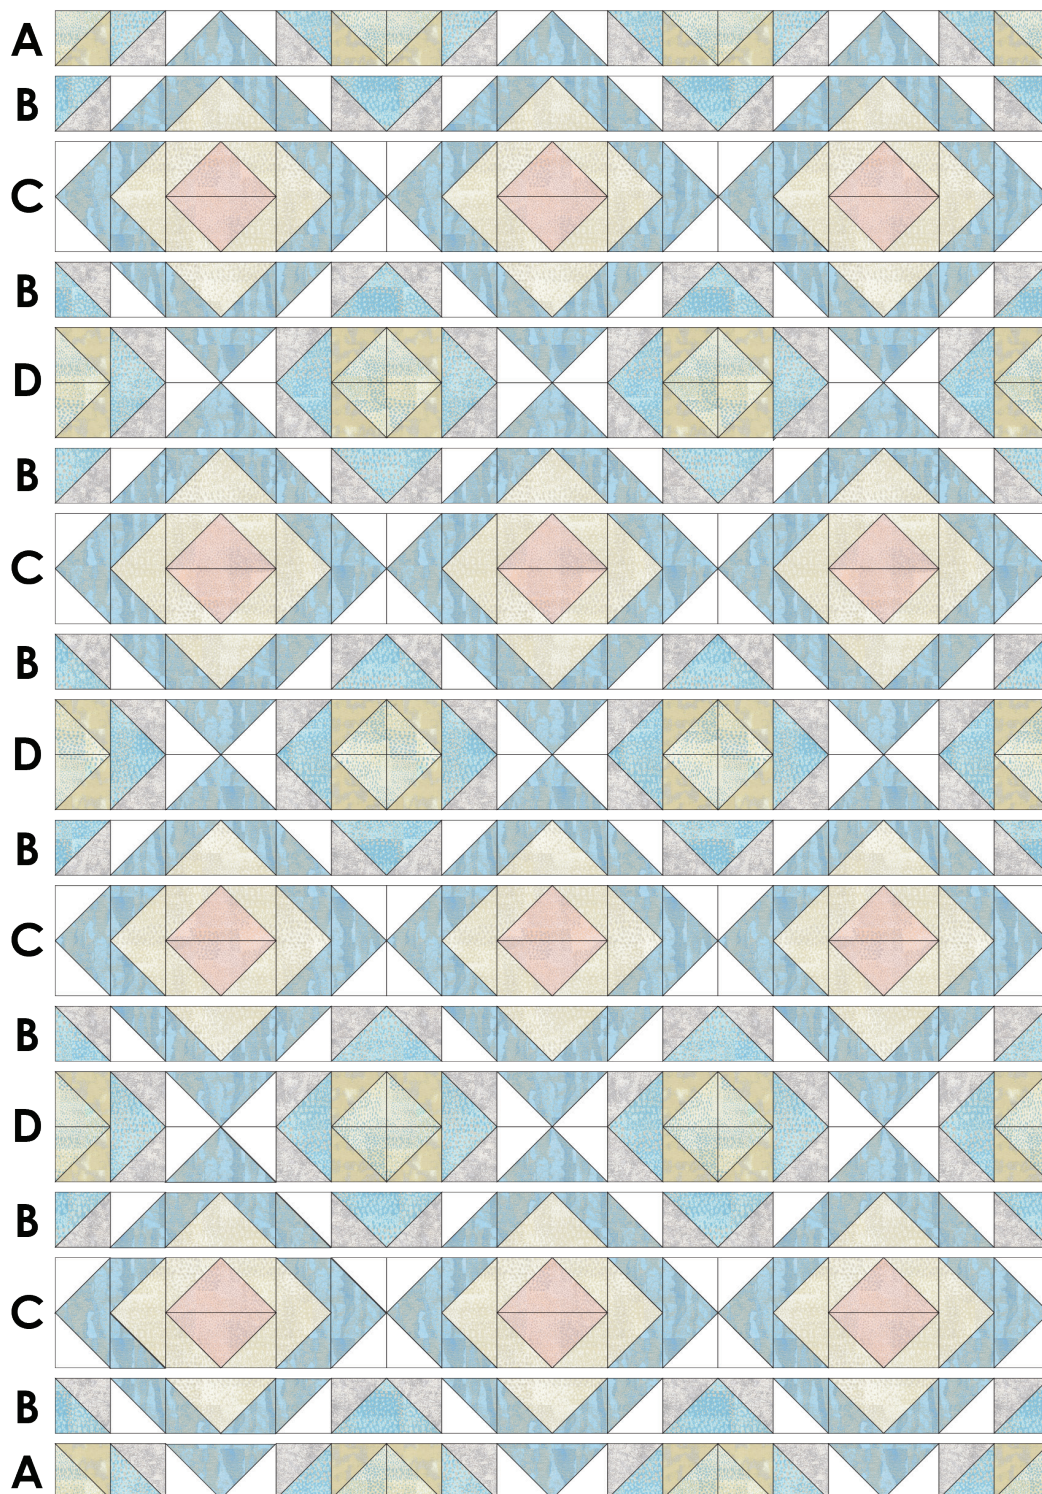

Step 15: Sew the rows together to form the quilt center. Press the row seams open.

Your quilt top is complete! Baste, quilt, bind and enjoy!

This pattern may be used for personal purposes only and may not be reproduced in any form without the express permission from Robert Kaufman Fabrics. This pattern is not for resale. All patterns, unless otherwise attributed, are © Robert Kaufman Co., Inc. 2005-2021. All rights reserved.