


GOING MY WAY

Designed by Elisabeth Hardy for RK
www.robertkaufman.com

Featuring *Hello*
LUCKY By Hello! *Lucky*

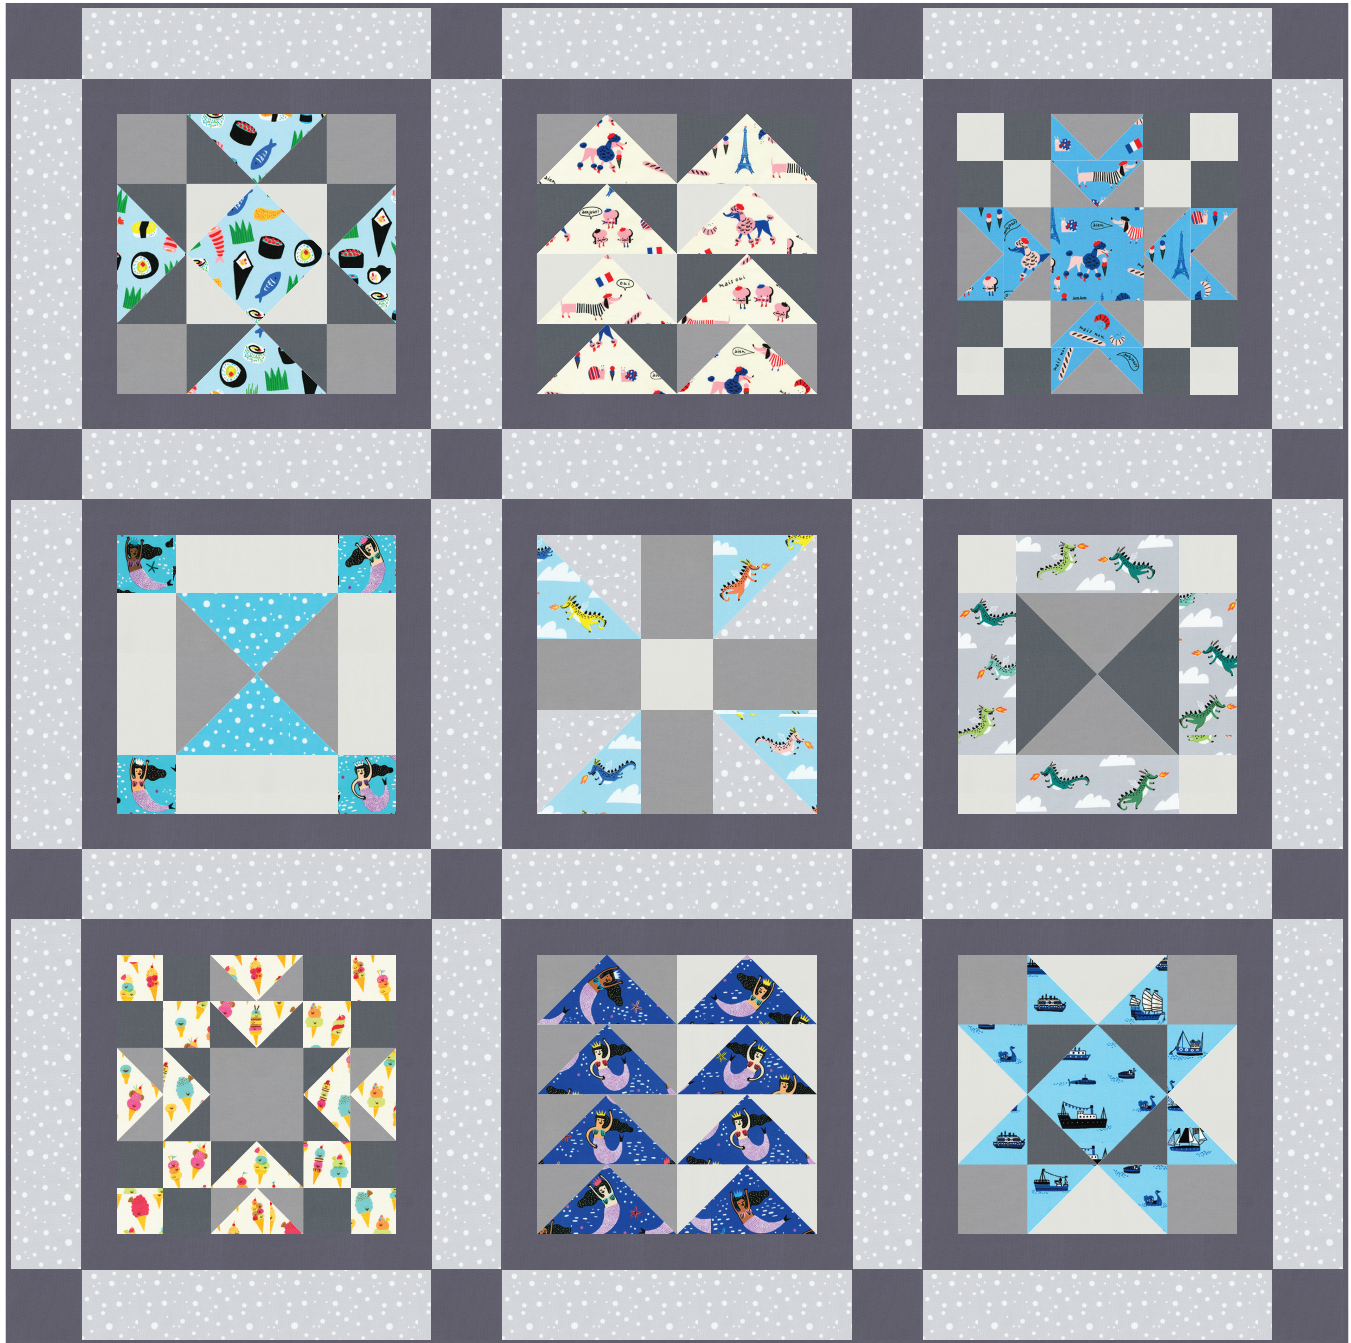

Finished quilt measures: 57" x 57"




Difficulty Rating: **Intermediate**

ROBERTKAUFMAN
F A B R I C S

For questions about this pattern, please email Patterns@RobertKaufman.com.

Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

| Color | Fabric | Name/SKU | Yardage | Color | Fabric | Name/SKU | Yardage |
|---|--------|------------------------|------------|---|----------|---|------------|
|  | A | AILD-18674-4 BLUE | 1/4 yard |  | I | AILD-18669-70 AQUA | 1/8 yard |
|  | B | K001-839 DOVE | 1/2 yard |  | J | AILD-18670-70 AQUA | 1/4 yard |
|  | C | K001-106 METAL | 1/2 yard |  | K | AILD-18665-12 GREY | 1-1/8 yard |
|  | D | K001-854 OVERCAST | 5/8 yard |  | L | AILD-18670-12 GREY | 1/4 yard |
|  | E | K001-1080 COAL | 1-1/8 yard |  | M | AILD-18673-84 CREAM | 1/3 yard |
|  | F | AILD-18671-15 IVORY | 1/3 yard |  | N | AILD-18669-9 NAVY | 1/3 yard |
|  | G | AILD-18671-4 BLUE | 1/3 yard |  | O | AILD-18667-4 BLUE | 1/3 yard |
|  | H | AILD-18665-4 BLUE | 1/4 yard |  | Binding* | K001-1080 COAL <i>*Also used for Fabric E</i> | 1/2 yard |

Copyright 2019, Robert Kaufman
For individual use only - Not for resale

You will also need:
3-5/8 yards for backing

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

Tip: Organize each cut piece of fabric in stacks labeled by block number. This will help when piecing each block.

*A note about fussy cutting: Most of the print fabrics in this quilt call for fussy cutting (cutting around a certain motif on the fabric to showcase it in the finished block). For rectangles, look at the final block and note if it will be a full rectangle in the block or a flying geese unit, as this may affect where you choose to fussy cut. **All dimensions are listed width first, then height, in order for the print to be oriented correctly in the final quilt.** For squares, look at the final block to note if it will be a full square or a half-square triangle. As in the rectangles, this may affect which are you choose to fussy cut.*

From Fabric A, fussy cut:

- one 4-3/4" square, cut on point for Block 1
- two 3-1/2" x 6-1/2" rectangles for Block 1
- two 6-1/2" x 3-1/2" rectangles for Block 1

From Fabric B, cut:

- one 3-7/8" x WOF strip. Subcut:
 - two 3-7/8" squares. Cut in half along one diagonal for Block 1.
- two 3-1/2" x WOF strips. Subcut:
 - four 3-1/2" squares for Block 2
 - one 3-1/2" square for Block 5
 - eight 3-1/2" squares for Block 8
 - four 3-1/2" x 6-1/2" rectangles for Block 9
- one 3" x WOF strip. Subcut:
 - four 3" x 7-1/2" rectangles for Block 4
 - four 3" squares for Block 6
- one 2-1/2" x WOF strip. Subcut:
 - eight 2-1/2" squares for Block 3

From Fabric C, cut:

- two 2-1/2" x WOF strips. Subcut:
 - eight 2-1/2" squares for Block 3
 - sixteen 2-1/2" squares for Block 7
- one 8-1/4" x WOF strip. Subcut:
 - one 8-1/4" square. Cut in half along both diagonals. Set two triangles aside for Block 6. Save the remaining two for another project.

Trim the remainder of the strip to 7-3/4" wide, then subcut:
one 3-7/8" x 7-3/4" rectangle. Cut the rectangle in half to make two 3-7/8" squares.
Cut in half along one diagonal and set aside for Block 9.
Trim the remainder of the strip to TWO 3-1/2" wide strips, then subcut:
eight 3-1/2" squares for Block 1
eight 3-1/2" squares for Block 2

From Fabric D, cut:

one 8-1/4" x WOF strip. Subcut:
one 8-1/4" square. Cut in half along both diagonals. Set two triangles aside for Block 4
and two aside for Block 6.
Trim the remainder of the strip to 4-1/2" wide, then subcut:
one 4-1/2" square for Block 7
Trim the remainder of the strip to 3-1/2" wide, then subcut:
four 3-1/2" squares for Block 1
two 3-1/2" x WOF strips. Subcut:
four 3-1/2" squares for Block 2
four 3-1/2" x 5" rectangles for Block 5
eight 3-1/2" squares for Block 8
four 3-1/2" squares for Block 9
two 2-1/2" x WOF strips. Subcut:
four 2-1/2" x 4-1/2" rectangles for Block 3
eight 2-1/2" squares for Block 3
eight 2-1/2" squares for Block 7

From Fabric E, cut:

two 3-1/2" x WOF strips. Subcut:
sixteen 3-1/2" squares for the cornerstones
fifteen 2" x WOF strips. Subcut:
eighteen 2" x 15-1/2" strips for the top/bottom block borders
eighteen 2" x 12-1/2" strips for the side block borders

From Fabric F, fussy cut:

eight 6-1/2" x 3-1/2" rectangles for Block 2

From Fabric G, fussy cut:

one 4-1/2" square for Block 3
two 2-1/2" x 4-1/2" rectangles for Block 3
two 4-1/2" x 2-1/2" rectangles for Block 3
eight 2-1/2" squares for Block 3

From Fabric H, cut:

one 8-1/4" square. Cut in half along both diagonals. Set two triangles aside for Block 4. Save
the remaining two for another project.

From Fabric I, fussy cut:

four 3" squares for Block 4

From Fabric J, cut:

two 5-1/2" squares for Block 5

From Fabric K, cut:

two 15-1/2" x WOF strips. Subcut:
twenty-four 3-1/2" x 15-1/2" sashing strips
two 5-1/2" squares for Block 5

From Fabric L, fussy cut:

two 3" x 7-1/2" rectangles for Block 6
two 7-1/2" x 3" rectangles for Block 6

From Fabric M, fussy cut:

four 2-1/2" x 4-1/2" rectangles for Block 7
four 4-1/2" x 2-1/2" rectangles for Block 7
eight 2-1/2" squares for Block 7

From Fabric N, fussy cut:

eight 6-1/2" x 3-1/2" rectangles for Block 8

From Fabric O, fussy cut:

one 4-3/4" square, cut on point, for Block 9
eight 3-1/2" squares for Block 9

From the Binding Fabric, cut:


six 2-1/2" x WOF strips

Assemble Blocks 1 and 9


Step 1: Sew a 3-7/8" Fabric B triangle to opposite sides of the 4-3/4" Fabric A center square. Press toward the triangles. Sew two 3-7/8" Fabric B triangles to the remaining two edges of the square. Press. Trim the square-in-a-square unit to 6-1/2" square, if needed.



Step 2: Place a 3-1/2" Fabric C square RST at one end of a 3-1/2" x 6-1/2" Fabric A rectangle. Mark a diagonal line on the wrong side of the square, as shown. Sew on the marked line and trim away the excess fabric, leaving a 1/4" seam allowance. Press toward the triangle.

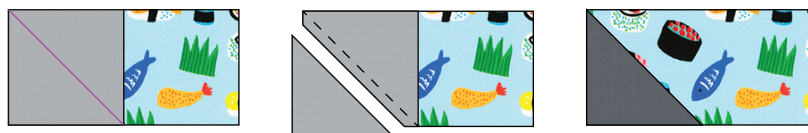

Step 3: Repeat Step 2 at the remaining end of the rectangle. The resulting flying geese block should measure 3-1/2" x 6-1/2".

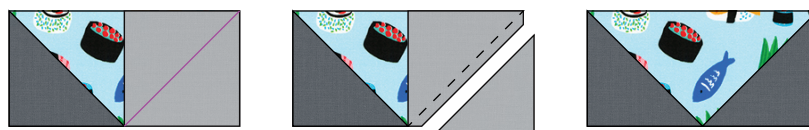

Step 4: Repeat with all remaining Fabric A, Block 1 rectangles.

Step 5: Gather:

four 3-1/2" Fabric D squares

four flying geese units from Step 4

one square-in-a-square center unit from Step 1


Arrange the units into three rows of three. Note the fabric placement and block orientation in the Block Assembly Diagram.

Step 6: Sew the units together to form the rows. Press the seams away from the flying geese units.


Step 7: Sew the rows together, nesting the seams and pressing the seams to one side to form the block.

Step 8: Sew a 2" x 12-1/2" Fabric E strip to the left and right edges of the block. Press. Sew a 2" x 15-1/2" Fabric E strip to the top and bottom edges of the block. Press.

The resulting block should measure 15-1/2" square.

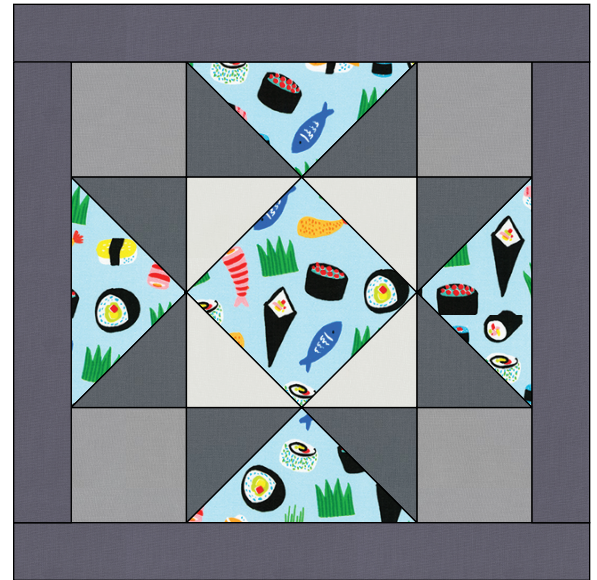

Repeat Steps 1-8 to make Block 9, referring to the fabric placement shown in this block diagram:

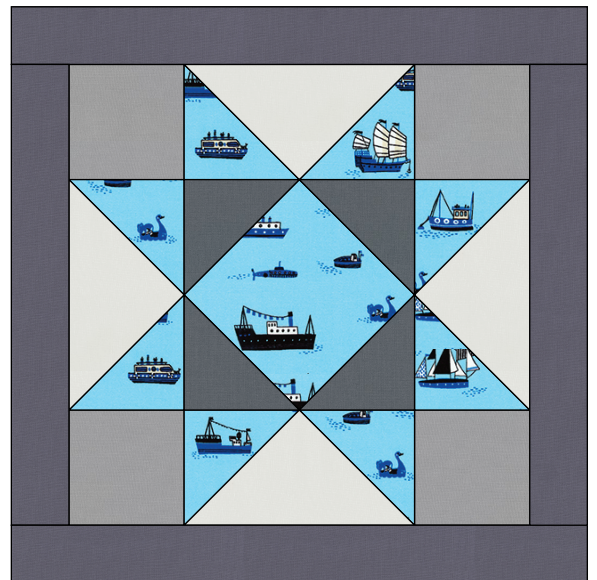

Assemble Blocks 2 and 8

Step 9: Using the process described in Steps 2-4, make a total of eight flying geese units, all with Fabric F rectangles: two units will use Fabric B squares, two units will use Fabric D squares and four units will use Fabric C squares. Trim all flying geese to 6-1/2" x 3-1/2".


Step 10: Arrange the units into four rows of two. Note the fabric placement and block orientation in the Block Assembly Diagram.

Step 11: Sew the units together to form the rows. Press the seams in opposite directions every other row.


Step 12: Sew the rows together, nesting the seams and pressing the seams to one side to form the block.

Step 13: Sew a 2" x 12-1/2" Fabric E strip to the left and right edges of the block. Press. Sew a 2" x 15-1/2" Fabric E strip to the top and bottom edges of the block. Press.

The resulting block should measure 15-1/2" square.

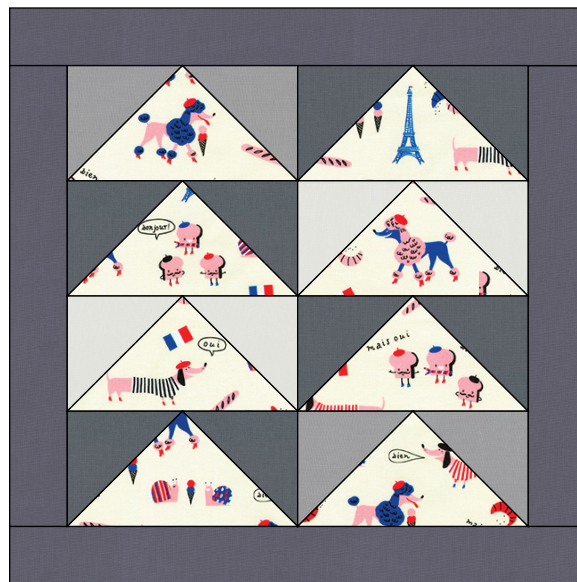

Repeat Steps 9-13 to make Block 8, referring to the fabric placement shown in this block diagram:

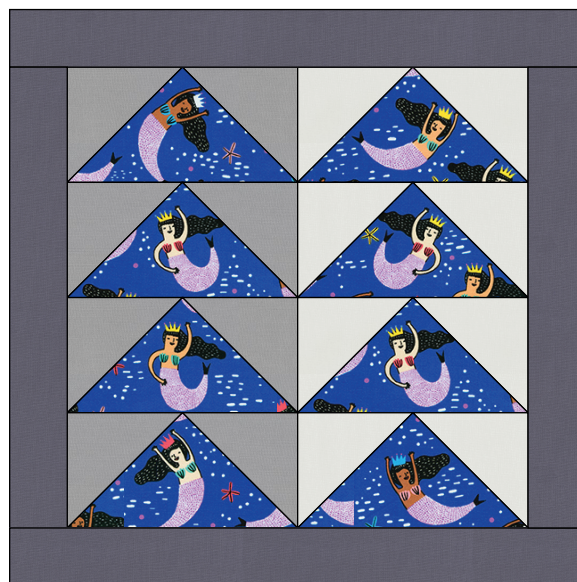

Assemble Blocks 3 and 7

Step 14: Using the process described in Steps 2-4, make a total of eight flying geese units, in the fabric combinations shown. Trim all flying geese to $4\frac{1}{2}'' \times 2\frac{1}{2}''$ (or $2\frac{1}{2}'' \times 4\frac{1}{2}''$).

Step 15: Gather:

eight $2\frac{1}{2}''$ Fabric B squares
eight $2\frac{1}{2}''$ Fabric C squares
four G/D flying geese
four D/G flying geese
one $4\frac{1}{2}''$ Fabric G square

Arrange the units into five rows of five. Note the fabric placement and block orientation in the Block Assembly Diagram. *Note: feel free to sew four four-patch units and make four flying geese pair units first, then sew the units together in three rows of three.*



Step 16: Sew the units together to form the rows. Press the seams toward in opposite directions every other row.

Step 17: Sew the rows together, nesting the seams and pressing the seams to one side to form the block.



Step 18: Sew a $2'' \times 12\frac{1}{2}''$ Fabric E strip to the left and right edges of the block. Press. Sew a $2'' \times 15\frac{1}{2}''$ Fabric E strip to the top and bottom edges of the block. Press.

The resulting block should measure $15\frac{1}{2}''$ square.

Repeat Steps 14-18 to make Block 7, referring to the fabric placement shown in this block diagram:

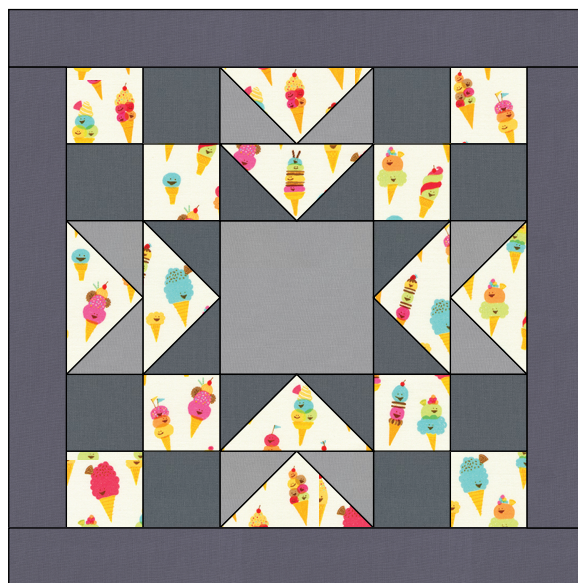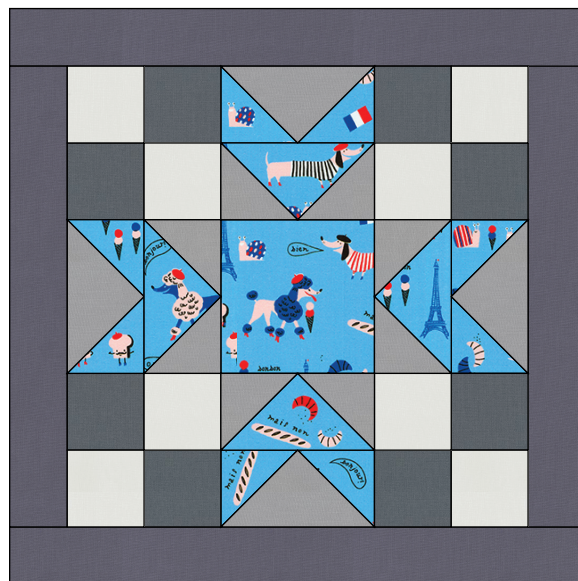


Step 19: Arrange two Fabric H and two Fabric D triangles to form an hourglass block, as shown in the example here.

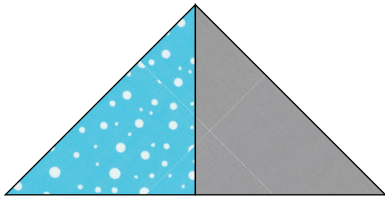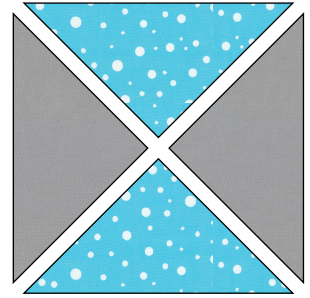

Step 20: Sew one H triangle to one D triangle to form a pair. Repeat with the remaining triangles. Press both seams to the darker fabric.

Step 21: Sew the triangles together along the longest edge, nesting the seams and pressing the seam open or to one side. Trim to 7-1/2" square.

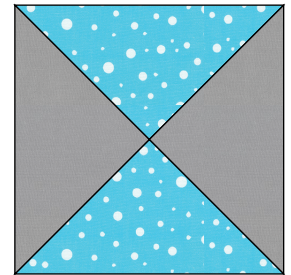


Step 22: Gather:
the hour-glass block from Step 21
four 3" Fabric I squares
four 3" x 7-1/2" Fabric B rectangles

Arrange the units into three rows of three. Note the fabric placement and block orientation in the Block Assembly Diagram.

Step 23: Sew the units together to form the rows. Press the seams toward the rectangles.


Step 24: Sew the rows together, nesting the seams and pressing the seams to one side to form the block.

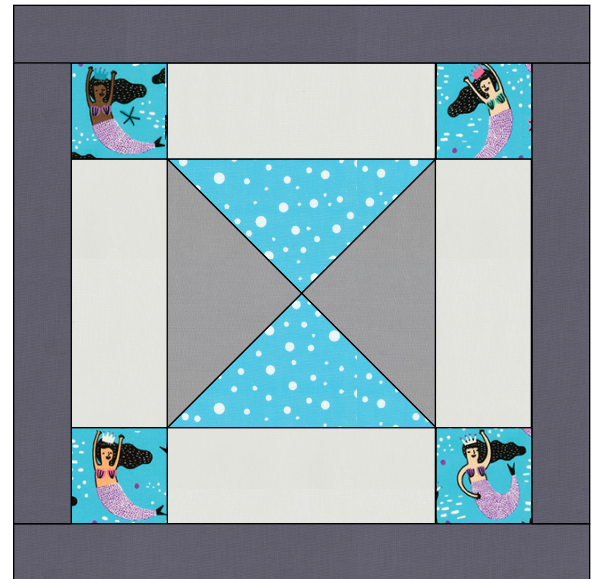

Step 25: Sew a 2" x 12-1/2" Fabric E strip to the left and right edges of the block. Press. Sew a 2" x 15-1/2" Fabric E strip to the top and bottom edges of the block. Press.



The resulting block should measure 15-1/2" square.

Repeat Steps 19-25 to make Block 6, referring to the fabric placement shown in this block diagram:

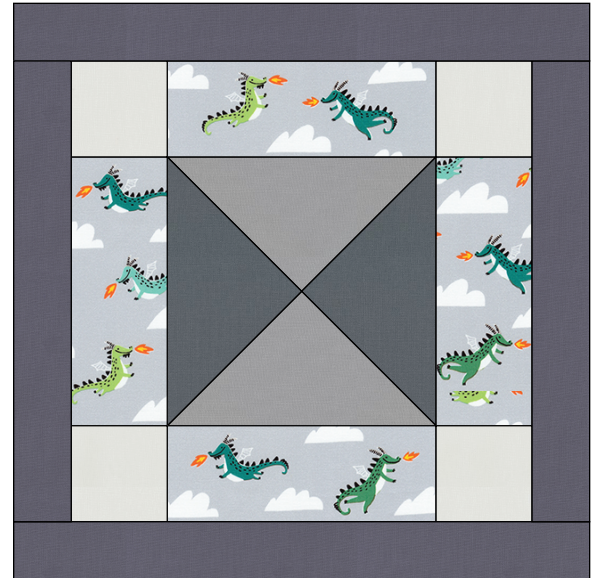

Assemble Block 5

Step 26: Pair a 5-1/2" Fabric J square with a 5-1/2" Fabric K square, RST. Mark a diagonal line on the wrong side of one square. Sew 1/4" away from both sides of the marked line. Cut on the marked line, creating two half-square triangles (HSTs). Press toward the darker fabric. Trim to 5" square. Repeat to make four J/K HSTs. *Note: In order for the Fabric J print to be oriented correctly on the final block, mark one diagonal from the upper left to lower right and the other diagonal for the second set of HSTs from the upper right to lower left.*

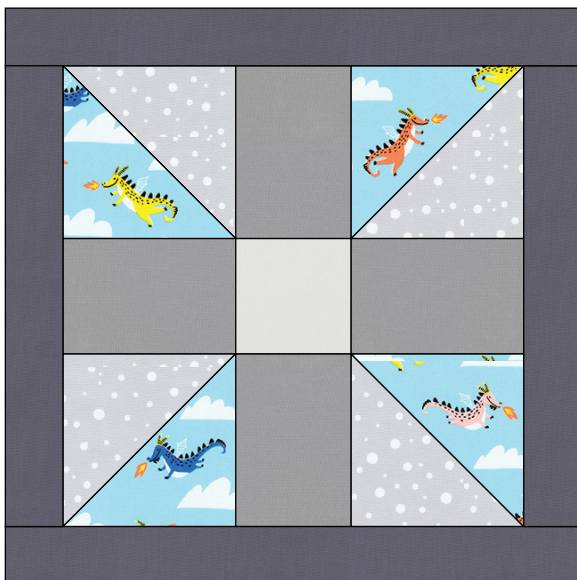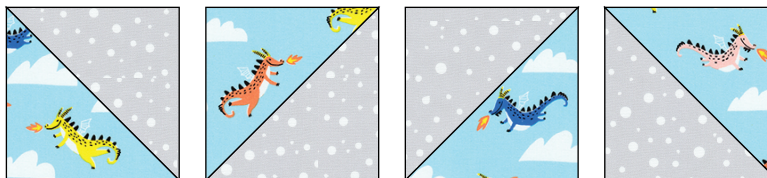

Step 27: Gather:

- four J/K HSTs from Step 26
- four 3-1/2" x 5" Fabric D rectangles
- one 3-1/2" Fabric B square

Arrange the units into three rows of three. Note the fabric placement and block orientation in the Block Assembly Diagram.


Step 28: Sew the units together to form the rows. Press the seams toward Fabric D.

Step 29: Sew the rows together, nesting the seams and pressing the seams to one side to form the block.

Step 30: Sew a 2" x 12-1/2" Fabric E strip to the left and right edges of the block. Press. Sew a 2" x 15-1/2" Fabric E strip to the top and bottom edges of the block. Press.

The resulting block should measure 15-1/2" square.

Assemble the Quilt

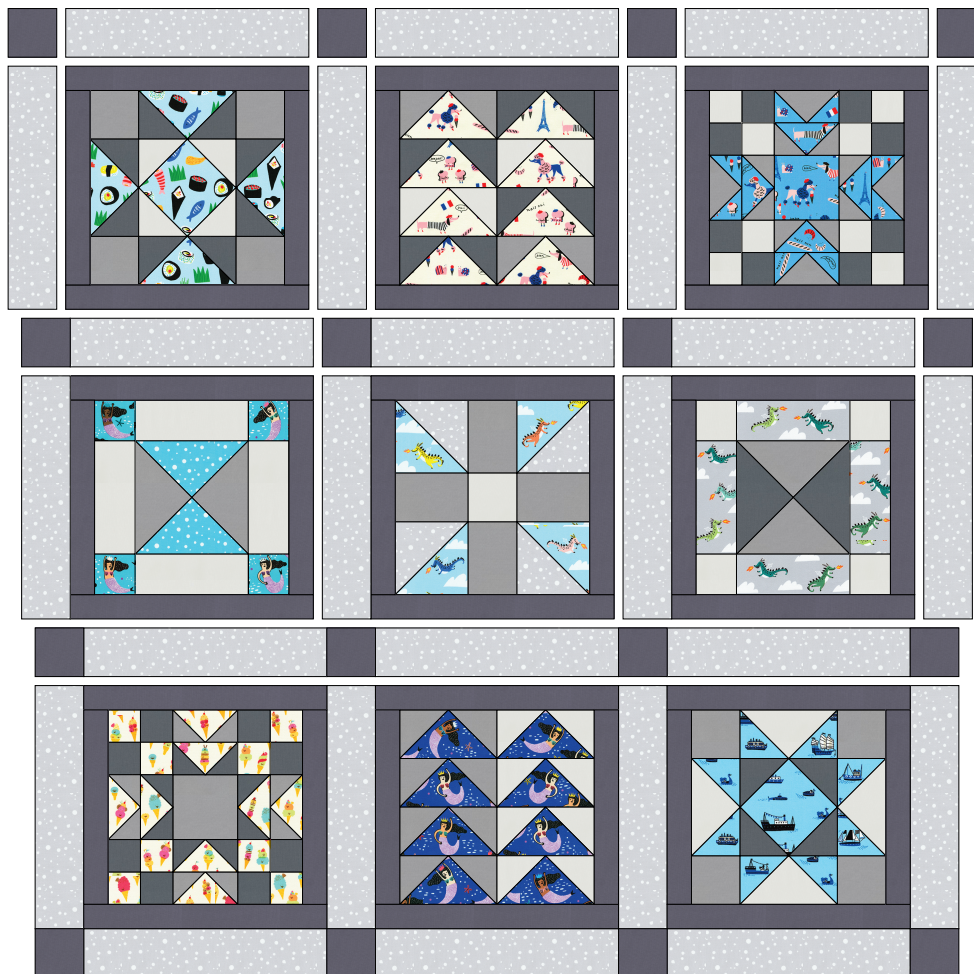

Step 31: Arrange Blocks 1-9 together as indicated in the Quilt Assembly Diagram. Sew each row together, using Fabric K sashing strips between each block and at the beginning and end of each row. Press seams toward the sashing. Repeat to make three block rows.

Step 32: Gather four cornerstone squares and three sashing strips. Sew each row together, using cornerstones between each sashing strip and at the beginning and end of each row. Press seams toward the sashing. Repeat to make four sashing rows.

Step 33: Sew the sashing and block rows together, pinning and nesting the seams. Press seams open or to the sashing.

Your quilt top is complete. Baste, quilt, bind and enjoy!

This pattern may be used for personal purposes only and may not be reproduced in any form without the express permission from Robert Kaufman Fabrics. This pattern is not for resale. All patterns, unless otherwise attributed, are © Robert Kaufman Co., Inc. 2005-2019. All rights reserved.