


HEN HOUSE

Designed by Elise Lea for RK
www.robertkaufman.com

Featuring **down on the farm**

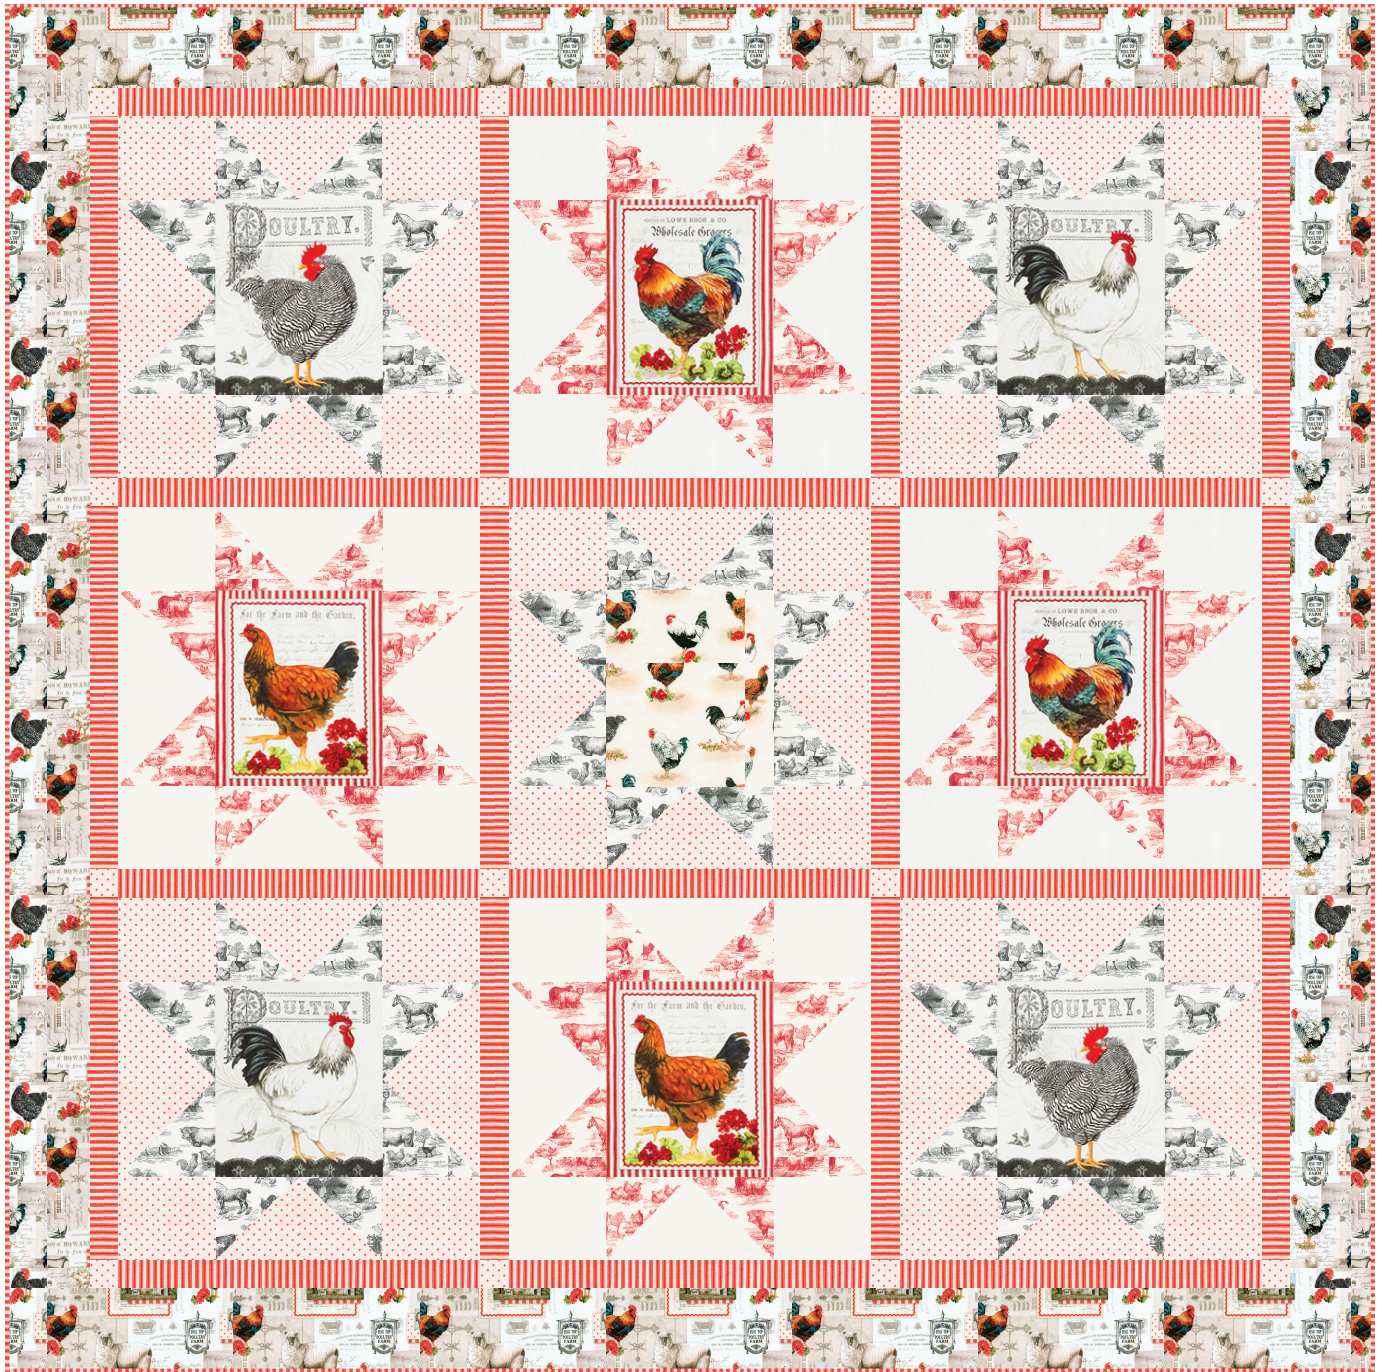

Finished quilt measures: 74" x 74"










Difficulty Rating: **Intermediate**

ROBERT KAUFMAN
F A B R I C S

For questions about this pattern, please email Patterns@RobertKaufman.com.

Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	AGBD-18642-276 COUNTRY	2/3 yard (one full panel)		F	K001-1339 SNOW	1 yard
	B	AGBD-18644-276 COUNTRY	1/3 yard		G	AGBD-18816-3 RED	3/4 yard
	C	AGBD-18645-2 BLACK	3/4 yard		H	AGBD-18643-276 COUNTRY	1-7/8 yard
	D	AGBD-18645-3 RED	5/8 yard		Binding*	AGBD-18816-3 RED <i>*Also used for Fabric G</i>	5/8 yard
	E	AGBD-18817-3 RED	1-1/4 yard	<div>You will also need: 4-3/4 yards for backing</div>			
Copyright 2019, Robert Kaufman For individual use only - Not for resale							

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

From Fabric A, fussy cut:

eight 9-1/2" x 11" rectangles for the block centers

From Fabric B, cut:

one 9-1/2" x 11" rectangle for a block center

From Fabric C, cut:

four 6-1/4" x WOF strips. Subcut:
twenty 6-1/4" squares for the HSTs

From Fabric D, cut:

three 6-1/4" x WOF strips. Subcut:
sixteen 6-1/4" squares for the HSTs

From Fabric E, cut:

four 6-1/4" x WOF strips. Subcut:
twenty 6-1/4" squares for the HSTs
three 5" x WOF strips. Subcut:
twenty 5" x 5-3/4" rectangles
one 2" x WOF strip. Subcut:
sixteen 2" squares for the cornerstones

From Fabric F, cut:

three 6-1/4" x WOF strips. Subcut:
sixteen 6-1/4" squares for the HSTs
three 5" x WOF strips. Subcut:
sixteen 5" x 5-3/4" rectangles

From Fabric G, cut:

twelve 2" x WOF strip. Subcut:
twenty-four 2" x 20" sashing strips

From Fabric H, cut:


two 5" x length of fabric strips. Subcut:
two 5" x 65" side outer borders
From the remaining width of fabric, cut:
five 5" x WOF strips. Sew together, end-to-end, then trim:
two 5" x 74" top/bottom outer borders

From the Binding Fabric, cut:

eight 2-1/2" x WOF strips

Assemble the Half-Square Triangles

Step 1: Pair each 6-1/4" Fabric C square with a Fabric E square, RST, with the Fabric C print going the same direction on your work surface. On half of the pairs, mark a diagonal line on the wrong side of one square from upper left to lower right and on the remaining half of the pairs, mark the diagonal like from upper right to lower left. Sew 1/4" away from both sides of the marked line. Cut on the marked line, creating two half-square triangles (HSTs). Press toward the darker fabric. Trim half of each style to 5" square and the remaining half to 5-3/4" square. Repeat to make forty C/E HSTs.

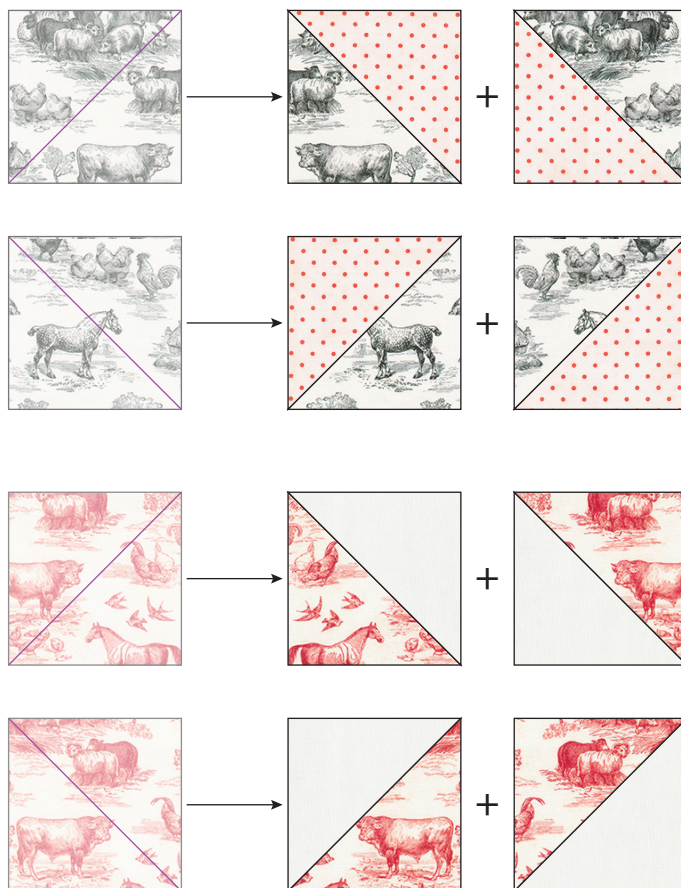

Step 2: Repeat Step 1 to make thirty-two D/F HSTs. As in Step 1, trim half of each style to 5" square and the remaining half to 5-3/4" square.

Assemble the A Blocks



Step 3: Gather:

- four 5-3/4" C/E HSTs (one of each orientation)
- four 5" C/E HSTs (one of each orientation)
- four Fabric E rectangles
- one Fabric A block center

Arrange the units as shown. Note the fabric placement and block orientation in the Block Assembly Diagram. Sew the HSTs together to form pairs, as shown. Press.

Step 4: Sew the units together in three rows of three to form rows. Press the seams away from the HST pairs.

Step 5: Sew the rows together, nesting the seams and pressing the seams to one side to form the block. The block will measure 20" square.

Repeat Steps 3-5 to make a total of five A Blocks. Note that one block will have Fabric B as the block center.

Assemble the B Blocks



Step 6: Repeat Steps 3-5 to make a total of four B Blocks, using D/F HSTs and Fabric D rectangles.

Assemble the Quilt


Step 7: Arrange the A and B Blocks together as indicated in the Quilt Assembly Diagram. Sew each row together, using Fabric G sashing strips between each block and at the beginning and end of each row. Press seams toward the sashing. Repeat to make three block rows.

Step 8: Gather four Fabric E cornerstone squares and three Fabric G sashing strips. Sew each row together, using cornerstones between each sashing strip and at the beginning and end of each row. Press seams toward the sashing. Repeat to make four sashing rows.

Step 9: Sew the sashing and block rows together, pinning and nesting the seams. Press seams open or to the sashing.

Step 10: Sew the side outer borders to the sides of the quilt center. Press toward the borders. Sew the top and bottom outer borders to the quilt center. Press toward the borders.

Your quilt top is complete! Baste, quilt, bind and enjoy!

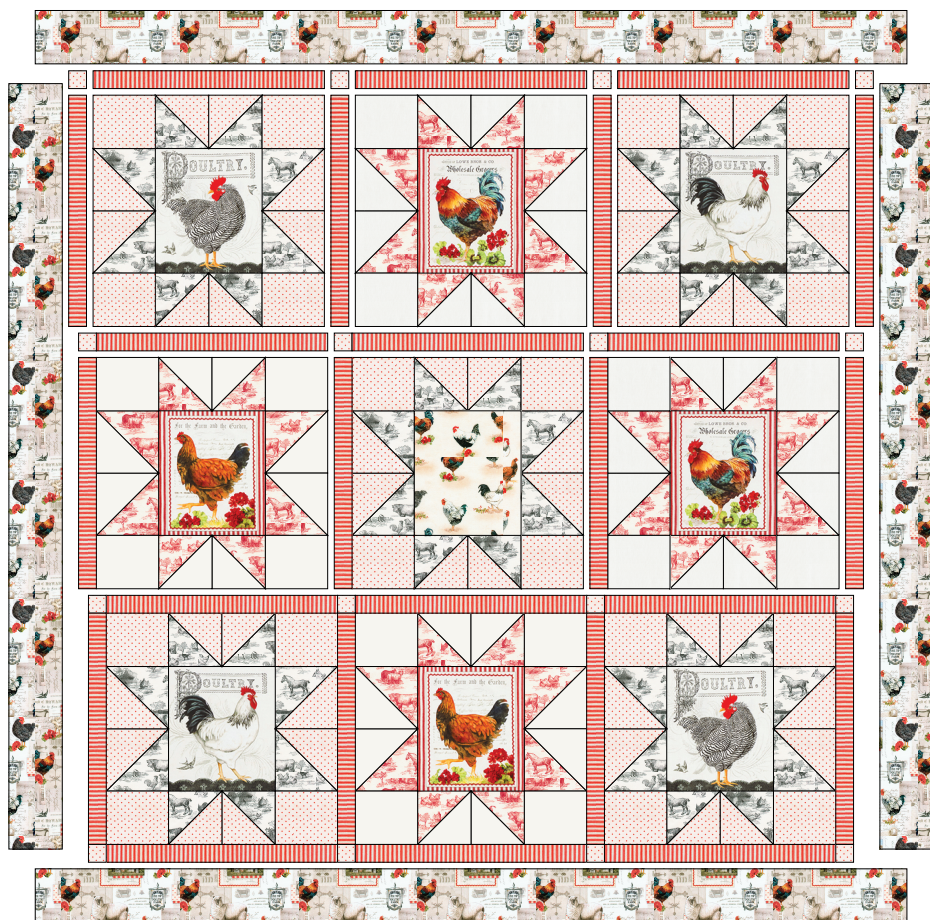

This pattern may be used for personal purposes only and may not be reproduced in any form without the express permission from Robert Kaufman Fabrics. This pattern is not for resale. All patterns, unless otherwise attributed, are © Robert Kaufman Co., Inc. 2005-2019. All rights reserved.