
HERE TO THERE

Designed by Robert Kaufman Fabrics www.robertkaufman.com

Featuring

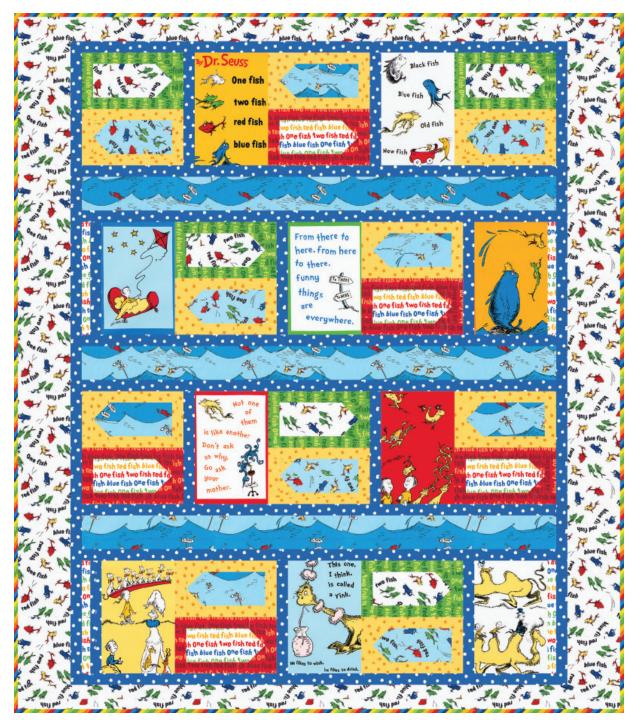

Finished quilt measures: 54-1/2" x 62-1/2"

Pattern Level: Confident Beginner

"I have basic block construction down and would like to learn a new trick!"



For questions about this pattern, please email Patterns@RobertKaufman.com.

Fabric and Supplies Needed

Fabric amounts based on yardage that is 43" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
		FQ-1126-8 One Fish Two Fish	1 bundle			ADE-12778-246 WATER	3/4 yard
blue fis		ADE-16328-1 WHITE	7/8 yard	A A A A A A A A A A A A A A A A A A A		ADE-16329-4 BLUE	1/8 yard
		ADE-12778-130 SUNSHINE	1/2 yard		3-1/2 y	will also need: ards for backing ards for binding	
					Copyright 2016, Robert Kaufman or individual use only - Not for resale		
Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
A CONTRACTOR	A	ADE-16327-203 CELEBRATION	2/3 yard (one panel)	io f <i>i</i> sh fish 0	F	ADE-16330-7 GREEN	1/4 yard
blue fis	в	ADE-16328-1 WHITE	7/8 yard	two fi	G	ADE-16330-203 CELEBRATION	1/4 yard
red fish	С	ADE-16328-4 BLUE	1/4 yard		Н	ADE-12778-130 SUNSHINE	1/2 yard
	D	ADE-16329-4 BLUE	3/8 yard		Ι	ADE-12778-246 WATER	3/4 yard
o tish fish O	Е	ADE-16330-3 RED	1/4 yard	You will also need: 3-1/2 yards for backing 5/8 yards for binding			

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 43" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

Cutting instructions are written for FQs. If using yardage, in some cases you may not need the same WOF quantity or size as the FQ cutting option in order to get the pieces needed. Adjust your WOF cuts accordingly to maximize the yardage.

Fabric A

Fussy cut ten panel blocks to 7" x 10-1/2"

Fabric **B**

From the FQ cut one strip 7-1/2" x 17-1/2"

sub cut into five 3-1/2" x 7-1/2" strips

From the 7/8yd

cut three strips 3" x WOF - set aside for outer border cut three strips 5-1/2" x WOF - set aside for outer border

Fabric C

Cut one strip 7-1/2" x 17-1/2" sub cut into five 3-1/2" x 7-1/2" strips

Fabric D

From the FQ cut one strip 7-1/2" x 17-1/2" sub cut into five 3-1/2" x 7-1/2" strips From the 3/8yd cut three strips 3-1/2" x 42-1/2" - cut selvages sparingly

Fabric E & F

Cut one strip 2" x 20" sub cut into ten 2" squares Cut one strip 9-1/2" x 15" sub cut into ten 9-1/2" x 1-1/2" strips Cut one strip 3-1/2" x 15" sub cut into ten 3-1/2" x 1-1/2" strips

Fabric G

Cut five 3-1/2" x 7-1/2" strips Cut four 1-1/4" x 10-1/2" strips

Fabric H

Cut one strip 2" x WOF sub cut into twenty 2" squares Cut seven strips 1-1/2" x WOF sub cut five strips into twenty 9-1/2" x 1-1/2" strips sub cut two strips into twenty 3-1/2" x 1-1/2" strips

Fabric I

Cut fifteen 1-1/2" x WOF strips

sub cut four strips into ten 1-1/2" x 10-1/2" strips - cut selvedges sparingly set the remaining strips aside for the inner border

Assemble the Blocks

Step 1 Sew a Fabric H 2" square to the upper left corner of a Fabric C 3-1/2" x 7-1/2" strip using the solid line in the diagram as a guide. Trim excess and press toward the triangle.





Step 2 Repeat with another Fabric H 2" square in the lower left corner of the block.

Step 3 Sew a 1-1/2" x 3-1/2" Fabric H strip to the left and right side of the block from Step 2. Press toward Fabric H.

Step 4 Sew a 1-1/2" x 9-1/2" Fabric H strip to the top and bottom of the block from Step 3. Press the seam toward Fabric H. Repeat steps 1-4 to create a total of five blocks. Label blocks as A1 and set aside. (See fig. 1)

Step 5 Repeat Steps 1-4 with Fabric D and Fabric H. Label as A2 and set aside. (See fig. 2)

Step 6 Repeat Steps 1-4 with Fabric B and Fabric F, but sew the squares on the right edge instead of the left. Label as A3 and set aside. (See fig. 3)

Step 7 Repeat Steps 1-4 with Fabric G and Fabric E, but sew the squares on the right edge instead of the left. Label as A4 and set aside. (See fig. 4)

Step 8 Sew an A3 block to the top of an A1 block (see fig. 5). Press seams toward A3. Label as B1 and set aside. Repeat with all A3 and A1 blocks.




fig. 1 - A1 blocks



fig. 5 B1 blocks



fig. 2 - A2 blocks





fig. 4 - A4 blocks

Step 9 Sew an A2 block to the top of an A4 block (see fig. 6). Press seams toward A4. Label as B2 and set aside. Repeat with all A2 and A4 blocks.

Step 10 Sew a fussy cut panel to the left side of four B1 blocks (label as C1) and four B2 blocks (label as C2) using the Quilt Assembly Diagram as a guide for which panel piece goes with which blocks. Press seams toward panels.

fig. 6 B2 blocks **Row 1** Start with your remaining B1 block that does not have a panel attached to it and sew a 1-1/2" x 10-1/2" Fabric I strip to the right side of your block, followed by a C2 block, another 1-1/2" x 10-1/2" Fabric I strip and ending with a C1 block. Use the Quilt Assembly Diagram to determine which panel to use. Press seams right.




Row 2 Start with a 1-1-4" x 10-1/2" Fabric G strip and sew a 1-1/2" x 10-1/2" Fabric I strip to the right edge. Next add a C1 block, another 1-1/2" x 10-1/2" Fabric I strip, a C2 block, and yet another 1-1/2" x 10-1/2" Fabric I strip. Finish with one of the extra fussy cut panel blocks ending with a 1-1/4" x 10-1/2" Fabric G strip. Again use the Quilt Assembly Diagram to determine which panel goes where. Press seams right.



Row 3 Repeat directions for Row 1 except this time start with your remaining B2 block, and switch the positions of the C1 and C2 blocks. Continue to use the Quilt Assembly Diagram to determine which panel to use. Press seams right.



Row 4 Repeat directions for Row 2 except this time switch the positions of the C1 and C2 blocks. Continue to use the Quilt Assembly Diagram to determine which panel to use. Press seams right.



Assemble the Quilt Top



Quilt Assembly Diagram

Step 1 Sew a 1-1/2" x 42-1/2" Fabric I sashing strip to the top and bottom of Rows 1-4. Press toward sashing.

Step 2 Sew together rows with sashing in order starting with Row 1 and alternating with the Fabric D strips. Press toward sashing

Step 3 Sew three 1-1/2" x WOF Fabric I strips end to end. From the resulting strip cut two strips 1-1/2" x 57-1/2". Sew to the left and right sides of quilt top. Press toward sashing.

Add the Borders

Step 1 Sew three 5-1/2" x WOF Fabric B strips end to end. From the resulting strip cut two strips 5-1/2" x 57-1/2". Sew to the left and right sides of quilt top. Press toward sashing.

Step 2 Sew three 3" x WOF Fabric B strips end to end. From the resulting strip cut two strips 3" \times 54-1/2". Sew to the top and bottom of quilt top. Press toward sashing.

Finish the Quilt

Step 1 Cut backing fabric into two pieces 1-3/4yds x WOF. Sew together along selvage edge, press seam, and trim as desired.

Step 2 Layer your backing face down, then batting, then your quilt top face up.

Step 3 Baste through all layers, then quilt as desired.