


PEARL STARS

Designed by Ariga Wilson for RK
www.robertkaufman.com

Featuring **KONA**[®]
cotton solids

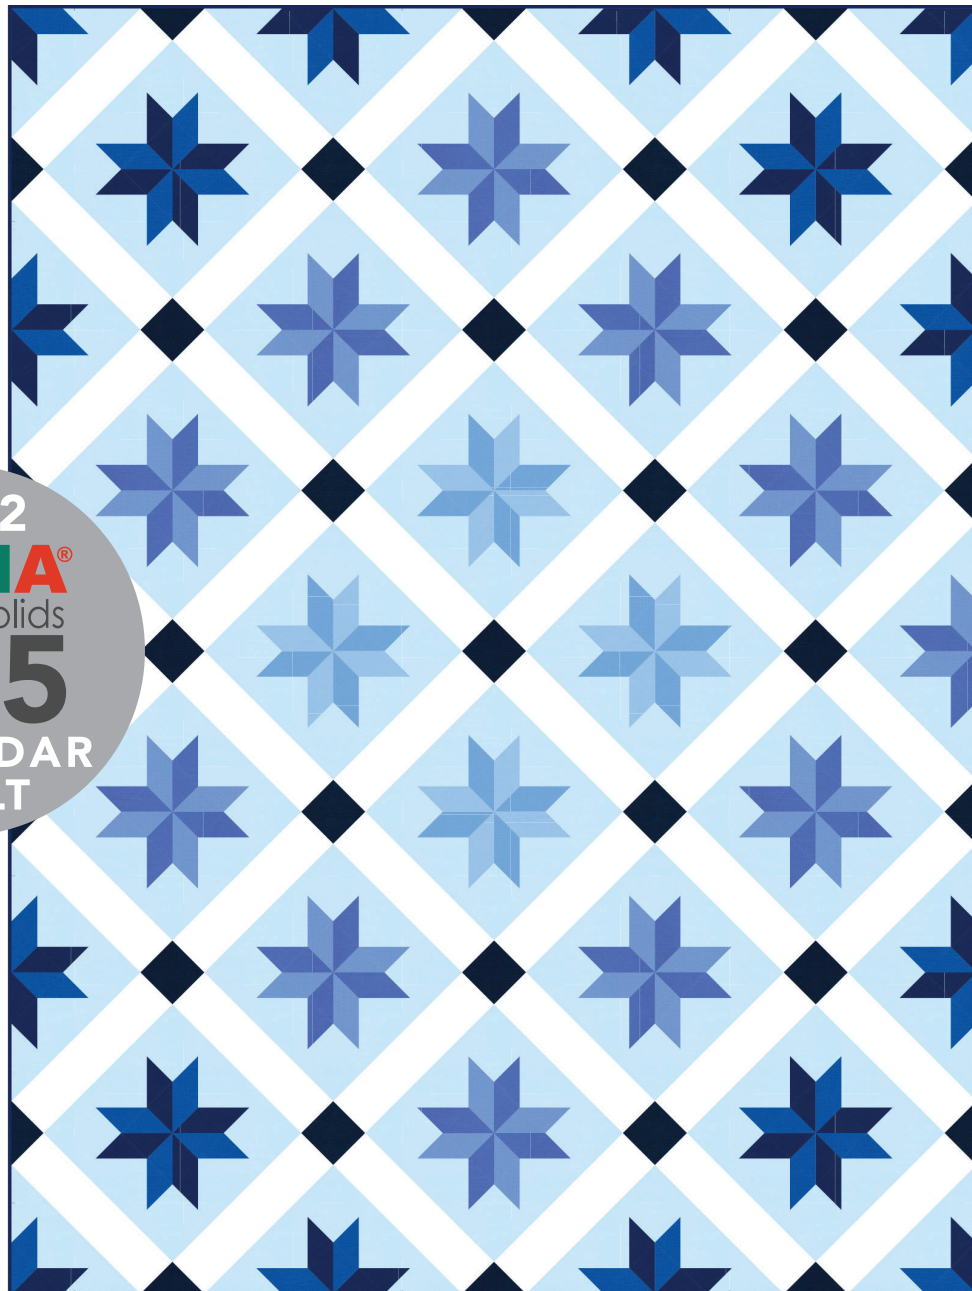

2022
KONA[®]
cotton solids
365
CALENDAR
QUILT

Finished quilt measures: 53" x 71"











Difficulty Rating: **Intermediate**

ROBERTKAUFMAN
F A B R I C S

For questions about this pattern, please email Patterns@RobertKaufman.com.

Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	K001-1387 WHITE	1-5/8 yards		F	K001-1171 HYACINTH	3/8 yard
	B	K001-152 CLOUD	2-1/4 yards		G	K001-1285 PERIWINKLE	1/4 yard
	C	K001-140 NIGHTFALL	1/3 yard		H	K001-27 CORNFLOWER	1/4 yard
	D	K001-848 BLUEPRINT	1/3 yard		I	K001-412 NAUTICAL	1/3 yard
	E	K001-196 BLUE JAY	3/8 yard		Binding*	K001-412 NAUTICAL <i>*Also used for Fabric I</i>	1/2 yard
<p>Copyright 2021, Robert Kaufman For individual use only - Not for resale</p>				<p>You will also need: 3-1/2 yards for backing</p>			

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

From Fabric A, cut:

twelve 4-1/2" x WOF strips. Subcut:
forty-eight 4-1/2" x 10-1/2" rectangle for the Block Sashing

From Fabric B, cut:

two 3-1/2" x WOF strips. Subcut:
fourteen 3-1/2" squares. Cut each square in half along one diagonal.
seven 3" x WOF strips. Subcut:
ninety-six 3" squares for the HSTs
six 2-1/2" x WOF strips. Subcut:
eighty-two 2-1/2" squares
twenty-four 1-1/2" x WOF strips. Subcut:
thirty-six 1-1/2" x 8-1/2" side block borders
sixty 1-1/2" x 10-1/2" top/bottom block borders

From each of Fabrics C and D, cut:

one 3-1/2" x WOF strip. Subcut:
six 3-1/2" squares. Cut each square in half once along the diagonal.
Trim the remainder of the strip to 3" wide, then subcut:
two 3" squares for the HSTs
two 3" x WOF strips. Subcut:
twenty-eight 3" squares for the HSTs, for a total of thirty

From each of Fabrics E and F, cut:

one 3-1/2" x WOF strip. Subcut:
one 3-1/2" square. Cut the square in half once along the diagonal.
Trim the remainder of the strip to 3" wide, then subcut:
twelve 3" square for the HSTs
three 3" x WOF strips. Subcut:
thirty-one 3" squares for the HSTs, for a total of forty-three

From each of Fabrics G and H, cut:

two 3" x WOF strips. Subcut:
sixteen 3" squares for the HSTs

From Fabric I, cut:

three 3" x WOF strips. Subcut:
thirty-one 3" squares for the Cornerstones

From the Binding Fabric, cut:

seven 2-1/2" x WOF strips

Assemble the Half-Square Triangles

Step 1: Pair a 3" Fabric B square with a 3" Fabric C square, RST. Mark a diagonal line on the wrong side of one square. Sew 1/4" away from both sides of the marked line. Cut on the marked line, creating two half-square triangles (HSTs). Press toward the darker fabric. Trim to 2-1/2" square. Repeat to make thirty-six B/C HSTs.




Step 2: Repeat Step 1 to make:



twenty-four
C/D HSTs



thirty-six B/D HSTs




forty-two E/F HSTs




forty-four
B/E HSTs




forty-four B/F HSTs



sixteen G/H HSTs




sixteen B/G HSTs



sixteen B/H HSTs

Assemble the Full Blocks



Step 3: Gather:
four 2-1/2" Fabric B squares
four C/D HSTs
four B/C HSTs
four B/D HSTs


Arrange the units into four rows of four. Note the fabric placement and block orientation in the Block Assembly Diagram.

Step 4: Sew the squares together to form the rows. Press the seams in opposite directions every other row.


Step 5: Sew the rows together, nesting the seams and pressing the seams to one side to form the block center.

Step 6: Sew the side Block Border pieces to the sides of the block center. Press toward the borders. Sew the top and bottom Block Border pieces to the block center. Press toward the borders.


The resulting C/D Block should measure 10-1/2" square. Make four C/D Blocks.



Step 7: Repeat Steps 3-6 to make:



ten E/F Blocks



four G/H Blocks

Assemble the Half Blocks

Step 8: Gather:

- one 2-1/2" Fabric B square
- one C/D HST
- two B/C HSTs
- two B/D HSTs
- two 3-1/2" Fabric B triangles
- one 3-1/2" Fabric C triangle
- one 3-1/2" Fabric D triangle




Arrange the units into four rows, as shown. Note the fabric placement and block orientation in the Block Assembly Diagram.

Step 9: Sew the units together to form the rows. Press the seams in opposite directions every other row.


Step 10: Sew the rows together, nesting the seams and pressing the seams to one side to form the half block center.

Step 11: Sew one top/bottom Block Border piece to the left edge of the block center, aligning the end of the strip with the right angle of the block center. The top of the strip will extend beyond the top point of the block center. Press toward the border. Sew a second top/bottom Block Border piece to the bottom edge of the block, as shown. Press toward the borders.



Repeat to make eight C/D Half Blocks.

Step 12: Repeat Steps 8-11 to make two E/F Half Blocks.



Assemble the Corner Blocks



Step 13: Gather:
one B/D HST
one B/C HST
two 3-1/2" Fabric B triangles
one 3-1/2" Fabric C triangle
one 3-1/2" Fabric D triangle


Arrange the units into two rows, as shown. Note the fabric placement and block orientation in the Block Assembly Diagram.

Step 14: Sew the units together to form the rows. Press the seams in opposite directions.


Step 15: Sew the rows together, nesting the seams and pressing the seams to one side to form the corner block center.

Step 16: Center and sew one top/bottom Block Border piece to the bottom edge of the block. Press toward the border.

Repeat to make four C/D Corner Blocks.



Assemble the Quilt

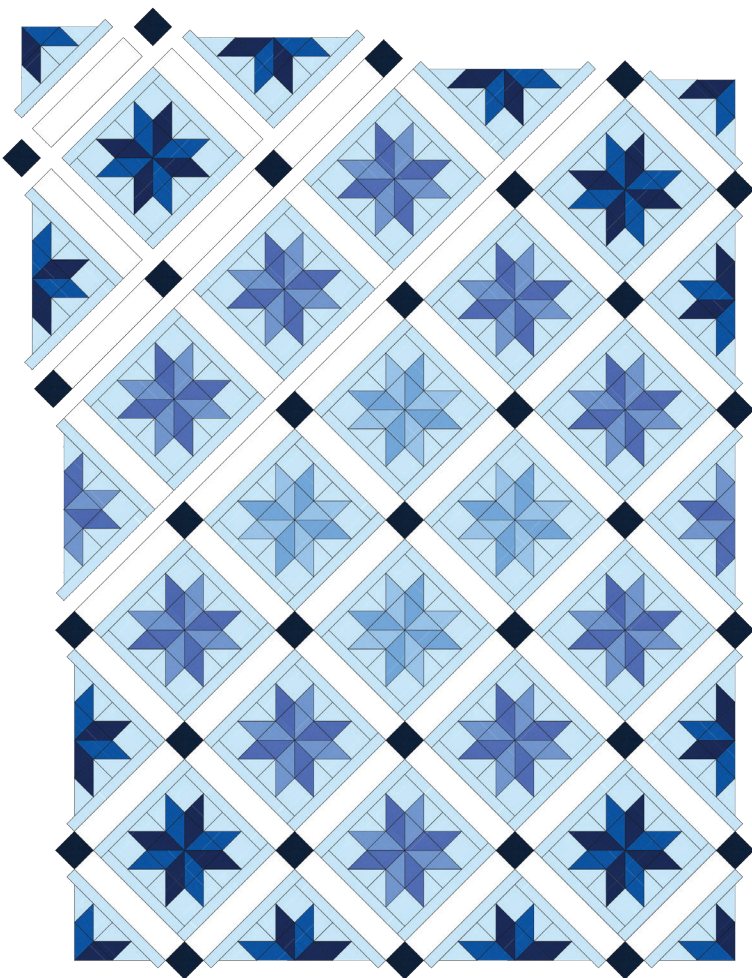


Step 17: Arrange the Corner, Half and Full Blocks together in eight diagonal rows, as indicated in the Quilt Assembly Diagram. Sew each row together, using sashing strips between each block. Press seams toward the sashing.

Step 18: Gather the cornerstone squares and remaining sashing strips. Sew each row together, using cornerstones between each sashing strip. Press seams toward the sashing. Repeat to make seven sashing rows, following the Quilt Assembly Diagram for the number of Cornerstones and sashing strips in each row.

Step 19: Sew the sashing and block rows together, pinning and nesting the seams. Press seams open or to the sashing.

Step 20: Trim the edges of the quilt, resulting in a quilt that is approximately 53" x 71".

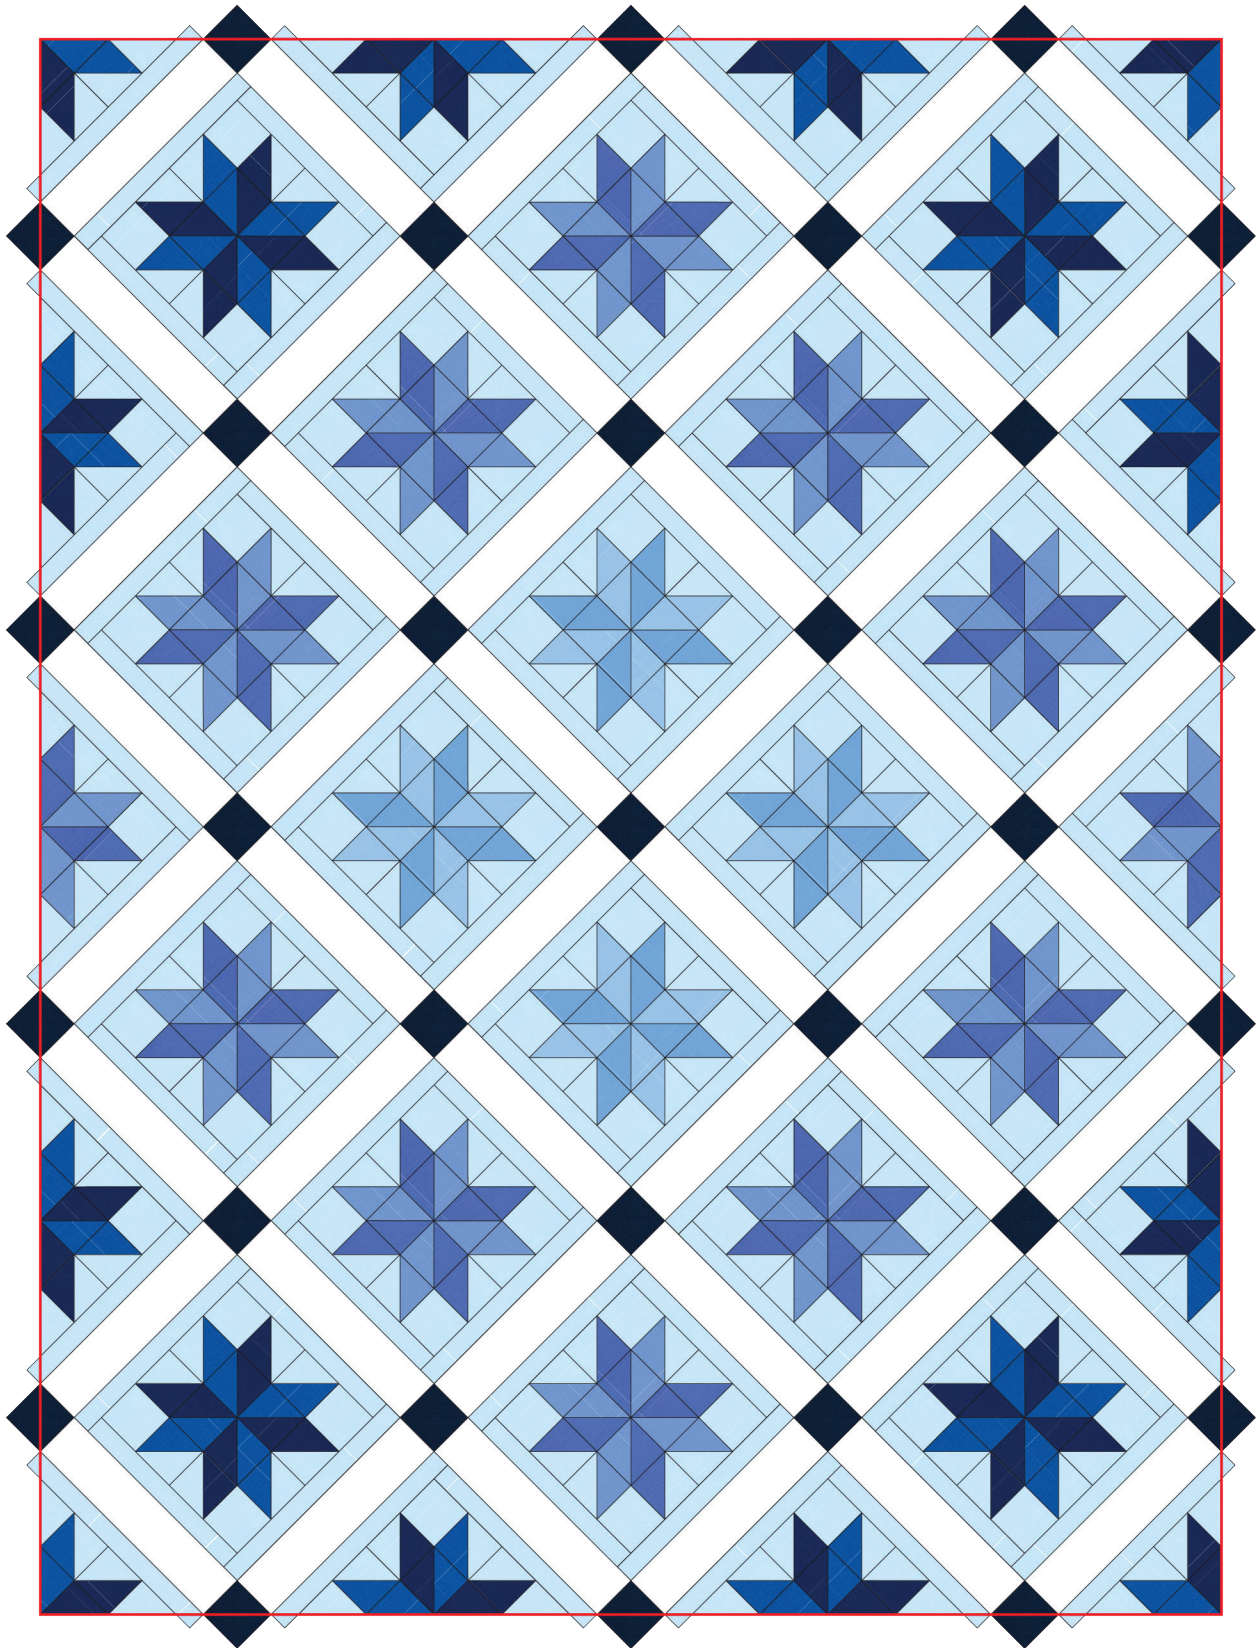

Your quilt top is complete! Baste, quilt, bind and enjoy!

This pattern may be used for personal purposes only and may not be reproduced in any form without the express permission from Robert Kaufman Fabrics. This pattern is not for resale. All patterns, unless otherwise attributed, are © Robert Kaufman Co., Inc. 2005-2021. All rights reserved.