

# QUICK AND EASY SKIRT

Designed by Elise Lea for RK  
[www.robertkaufman.com](http://www.robertkaufman.com)

Featuring **Blaze**




Difficulty Rating: **Beginner**

**ROBERTKAUFMAN**  
F A B R I C S

*For questions about this pattern, please email [Patterns@RobertKaufman.com](mailto:Patterns@RobertKaufman.com).*

## Fabric and Supplies Needed

*Fabric amounts based on yardage that is 42" wide.*

Color	Fabric	Name/SKU	Yardage	
	A	SRKD-19214-101 FLAME	2 yards	<div>You will also need: 1-1/2 to 2 yards of 1" wide elastic</div>
<p>Copyright 2019, Robert Kaufman For individual use only - Not for resale</p>				


## Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Wrong sides together has been abbreviated to WST
- Remember to measure twice and cut once!

## Cutting Instructions

### From Fabric A:

Cut fabric in half down the middle of the fabric parallel to the selvage. You should have two long pieces with the flames on one edge.

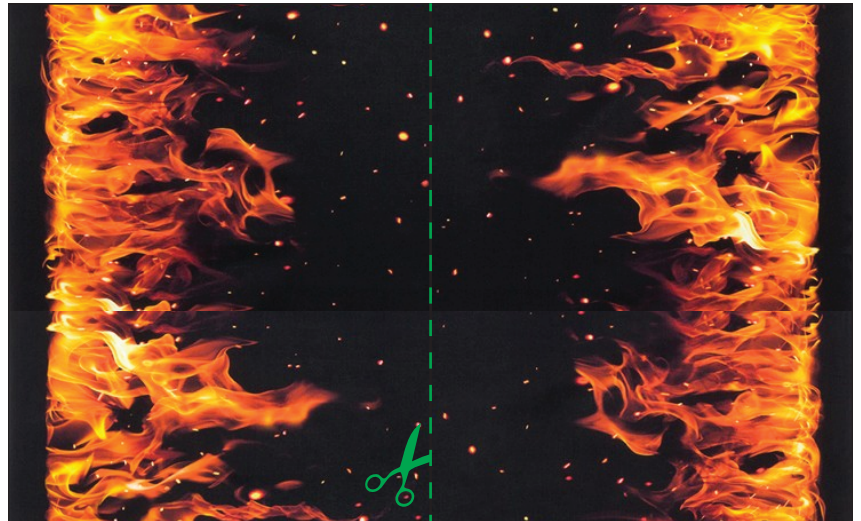

## Assembly Instructions

**Step 1:** Sew the two pieces together to create one long piece with a continuous flame along the bottom.




**Step 2:** Measure your waist. Trim the fabric to be 1-1/2 to 2 times the width of your waist depending on the fullness of the skirt you desire. The more fabric you use, the more full the skirt will be. *Note: The sample on the cover was two times the width of the waist.*

**Step 3:** Trim bottom edge of the skirt 1" away from edge of flames.




**Step 4:** Sew the short side edges RST to create one large loop.

**Step 5:** Fold the bottom edge of skirt WST by 1/2". Fold under again by 1/2" so all raw edges are hidden. Sew along edge of fold.

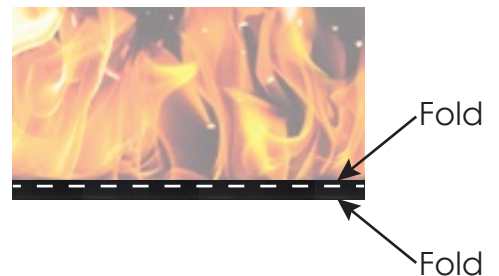



**Step 6:** Make the elastic casing by folding top edge of skirt under by  $\frac{1}{4}$ ", WST. Fold over again by 1- $\frac{1}{4}$ " so all raw edges are hidden. Sew along bottom edge of the casing, leaving a 3" opening at the back for inserting the elastic.

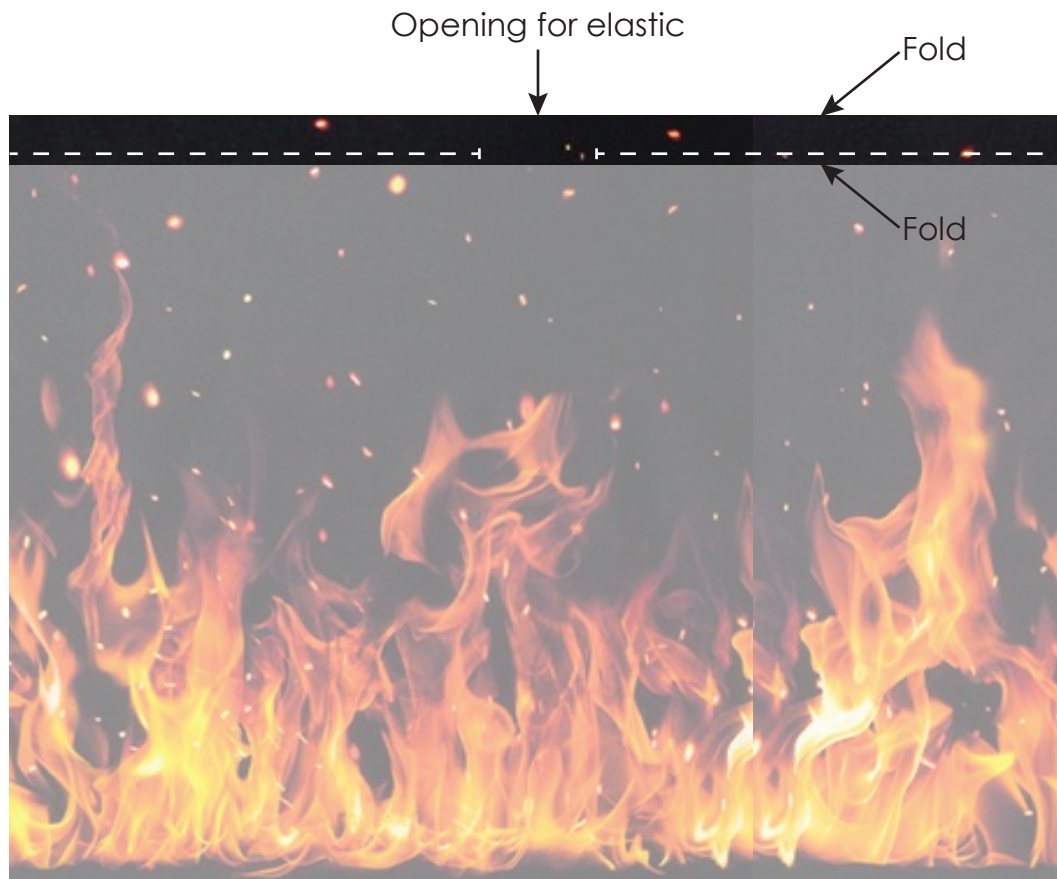

**Step 7:** Cut the elastic to a length that is 1" shorter than the waist measurement.

**Step 8:** Feed the elastic through the waist band casing, taking care to not twist the elastic. Overlap edges of elastic by about 1" and sew a square with an 'X' through the middle to hold elastic in place.

**Step 9:** Sew the opening closed.

Your skirt is complete! Enjoy!