


SLANTED STRIPES RUNNER

Designed by Elise Lea for RK
www.robertkaufman.com

Featuring ARTISAN
FABRICS

Auburn 1000

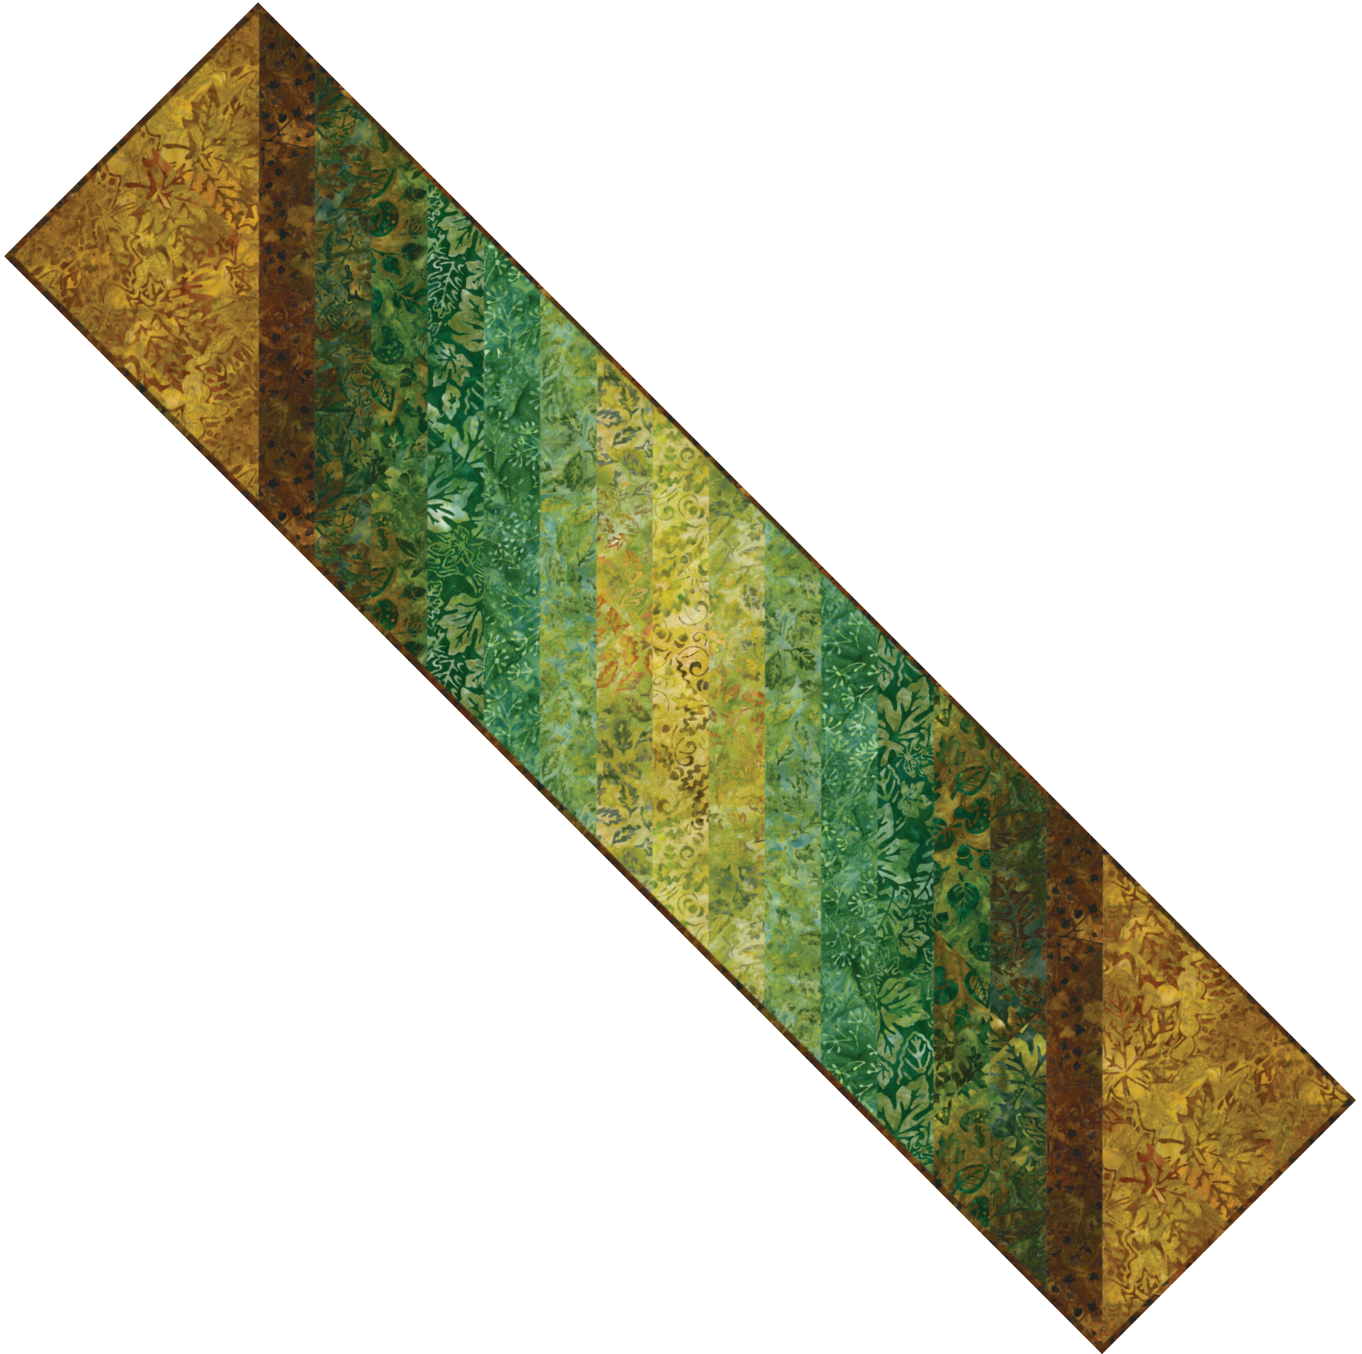

Finished project measures: 55" x 12-1/2"











Difficulty Rating: **Beginner**

ROBERTKAUFMAN
F A B R I C S

For questions about this pattern, please email Patterns@RobertKaufman.com.

Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	AMD-22031-165 COPPER	1/2 yard		F	AMD-22034-224 EVERGREEN	1/8 yard
	B	AMD-22035-180 RUSSET	1/8 yard		G	AMD-22036-43 LEAF	1/8 yard
	C	AMD-22032-44 FOREST	1/8 yard		H	AMD-22036-49 OLIVE	1/8 yard
	D	AMD-22030-49 OLIVE	1/8 yard		I	AMD-22033-46 PEAR	1/8 yard
	E	AMD-22032-224 EVERGREEN	1/8 yard		Binding*	AMD-22035-180 RUSSET	1/3 yard
				<i>*Also used for Fabric B</i>			
<p>Copyright 2023, Robert Kaufman For individual use only - Not for resale</p>				<p>You will also need: 1-1/4 yards for backing</p>			

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

From Fabric A, cut:

one 13-1/2" x WOF strip, subcut:

one 13-1/2" square, then cut the square once on the diagonal to yield two triangles.

From each of Fabrics B-H, cut:

one 2-1/2" x WOF strip, subcut:

two 2-1/2" x 20-1/2" rectangles.

From Fabric I, cut:

one 2-1/2" x WOF strip, subcut:


one 2-1/2" x 20-1/2" rectangle.

From the Binding Fabric, cut:


four 2-1/2" x WOF strips.

Assemble the Project Top

Step 1: Arrange the 2-1/2" Fabric B-I strips in a gradient pattern. When you are happy with the order of your strips, off set the ends of the strips by 2-1/2", then sew the strips together and press.

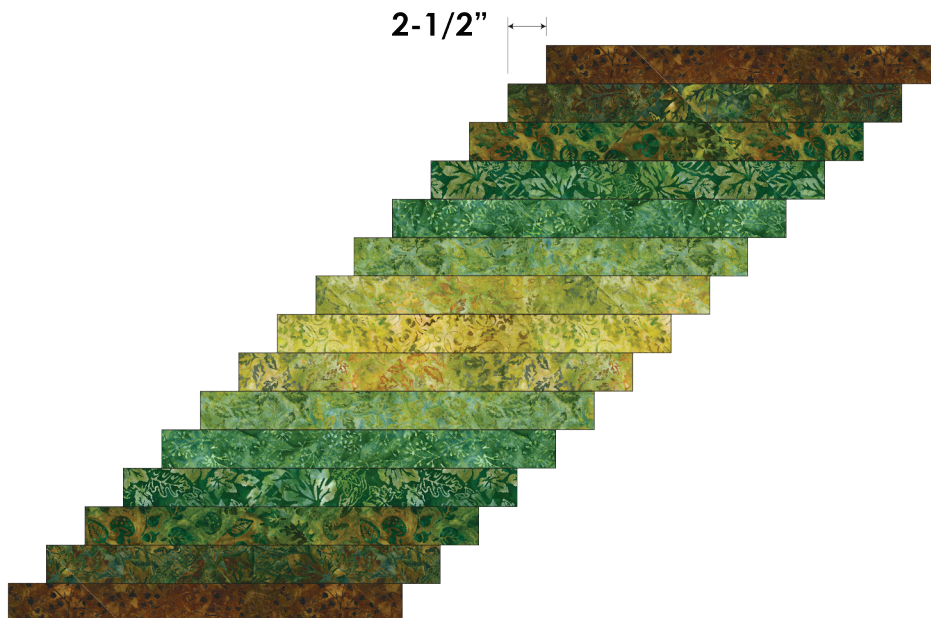

Step 2: Trim the staggered ends of the sewn unit by placing a ruler along the inner points of the strips and cutting along that line.

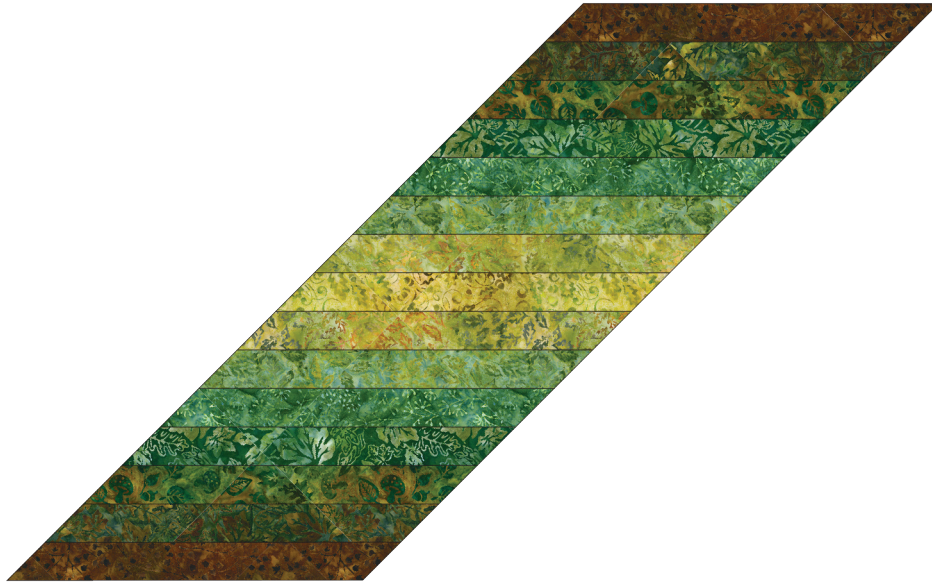

Step 3: Sew a Fabric A triangle to each end of the unit, then press.



Your project top is complete! Baste, quilt, bind, and enjoy!