

STAINED GLASS

Designed by Ariga Wilson for RK
www.robertkaufman.com

Featuring **KONA**[®]
cotton solids



Finished quilt measures: 56" x 64"






Difficulty Rating: **Beginner**

ROBERTKAUFMAN
F A B R I C S

For questions about this pattern, please email Patterns@RobertKaufman.com.




Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	K001-1387 WHITE	1-1/2 yards		J	K001-1328 SEAFOAM	1/4 yard
	B	K001-1090 CREAM	1/4 yard		K	K001-413 PARCHMENT	1/4 yard
	C	K001-1176 ICE PEACH	1/4 yard		L	K001-843 LINGERIE	1/4 yard
	D	K001-1268 OYSTER	1/4 yard		M	K001-184 EGGSHELL	1/4 yard
	E	K001-1271 SHELL	1/4 yard		N	K001-1205 LT. PARFAIT	1/4 yard
	F	K001-1181 IVORY	1/4 yard		O	K001-1242 NATURAL	1/4 yard
	G	K001-1017 BISON	1/4 yard		P	K001-849 DESERT GREEN	1/4 yard
	H	K001-1239 MUSHROOM	1/4 yard		Q	K001-186 STRAW	1/4 yard
	I	K001-841 EUCALYPTUS	1/4 yard		R	K001-478 LIMESTONE	1/4 yard

Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	S	K001-486 COBBLESTONE	1/4 yard		Binding*	K001-1176 ICE PEACH <i>*Also used for Fabric C</i>	1/2 yard
	T	K001-1362 STONE	1/4 yard	<div>You will also need: 4 yards for backing</div>			
Copyright 2021, Robert Kaufman <i>For individual use only - Not for resale</i>							

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

From Fabric A, cut:

thirty-four 1-1/2" x WOF strips. Sew eighteen strips together, then subcut:

- two 1-1/2" x 82" row sashing strips
- two 1-1/2" x 72" row sashing strips
- two 1-1/2" x 62" row sashing strips
- two 1-1/2" x 52" row sashing strips
- two 1-1/2" x 42" row sashing strips
- two 1-1/2" x 32" row sashing strips
- two 1-1/2" x 22" row sashing strips
- two 1-1/2" x 12" row sashing strips

From the remaining sixteen WOF strips, subcut:

- one hundred forty-four 1-1/2" x 4-1/2" block sashing strips.

From each of Fabrics B, C, F, J, M, O, Q and S, cut:

- one 4-1/2" x WOF strip. Subcut:
- nine 4-1/2" squares

From each of Fabrics D, E, G-I, K, L, N, P, R and T, cut:

one 4-1/2" x WOF strip. Subcut:

eight 4-1/2" squares

From the Binding Fabric, cut:

seven 2-1/2" x WOF strips

Assemble the Rows

Step 1: Arrange the B-T squares in piles by row, referring to the Quilt Assembly Diagram for which fabrics go in each row. Label the piles Row 1 - Row 17. Each square will be referred to as a Block.

Step 2: Sew two Blocks together, placing a 1-1/2" x 4-1/2" Fabric A sashing strip between the two Blocks. This is Row 1. Press toward the sashing. Repeat to make Row 17.

Step 3: Sew a 12-1/2" Fabric A strip to one edge of each row, centering along the length. Press toward the sashing.




Step 4: Sew four Blocks together, placing a 1-1/2" x 4-1/2" Fabric A sashing strip between each Block, and following the order in the Quilt Assembly Diagram. Press toward the sashing. This is Row 2. Repeat to make Row 16, following the Quilt Assembly Diagram for fabric placement.

Step 5: Sew a 22" Fabric A strip to one edge of each row, noting the Block placement and centering along the length. Press toward the sashing.



Step 6: Sew six Blocks together, placing a 1-1/2" x 4-1/2" Fabric A sashing strip between each Block. Press toward the sashing. This is Row 3. Repeat to make Row 15, following the Quilt Assembly Diagram for fabric placement.

Step 7: Sew a 32" Fabric A strip to one edge of each row, noting the Block placement and centering along the length. Press toward the sashing.



Step 8: Sew eight Blocks together, placing a 1-1/2" x 4-1/2" Fabric A sashing strip between each Block. Press toward the sashing. This is Row 4. Repeat to make Row 14, following the Quilt Assembly Diagram for fabric placement.

Step 9: Sew a 42" Fabric A strip to one edge of each row, noting the Block placement and centering along the length. Press toward the sashing.




Step 10: Sew ten Blocks together, placing a 1-1/2" x 4-1/2" Fabric A sashing strip between each Block. Press toward the sashing. This is Row 5. Repeat to make Row 13, following the Quilt Assembly Diagram for fabric placement.

Step 11: Sew a 52" Fabric A strip to one edge of each row, noting the Block placement and centering along the length. Press toward the sashing.




Step 12: Sew twelve Blocks together, placing a 1-1/2" x 4-1/2" Fabric A sashing strip between each Block. Press toward the sashing. This is Row 6. Repeat to make Row 12, following the Quilt Assembly Diagram for fabric placement.

Step 13: Sew a 62" Fabric A strip to one edge of each row, noting the Block placement and centering along the length. Press toward the sashing.




Step 14: Sew fourteen Blocks together, placing a 1-1/2" x 4-1/2" Fabric A sashing strip between each Block. Press toward the sashing. This is Row 7. Repeat to make Row 11, following the Quilt Assembly Diagram for fabric placement.

Step 15: Sew a 72" Fabric A strip to one edge of each row, noting the Block placement and centering along the length. Press toward the sashing.



Step 16: Sew sixteen Blocks together, placing a 1-1/2" x 4-1/2" Fabric A sashing strip between each Block. Press toward the sashing. This is Row 8. Repeat to make Row 10, following the Quilt Assembly Diagram for fabric placement.

Step 17: Sew a 82" Fabric A strip to one edge of each row, noting the Block placement and centering along the length. Press toward the sashing.



Step 18: Sew seventeen Blocks together, placing a 1-1/2" x 4-1/2" Fabric A sashing strip between each Block. Press toward the block sashing. This is Row 9. Note that this will not have the row sashing sewn to it at this point.




Assemble the Quilt


Step 19: Center and sew Row 1 to Row 2, as shown, using the block sashing seams to help you align the rows. Press. Repeat to make a second unit like this using Rows 16 and 17.



Step 20: Center and sew Row 3 to Row 4, as shown, using the block sashing seams to help you align the rows. Press. Repeat to make a second unit like this using Rows 14 and 15.

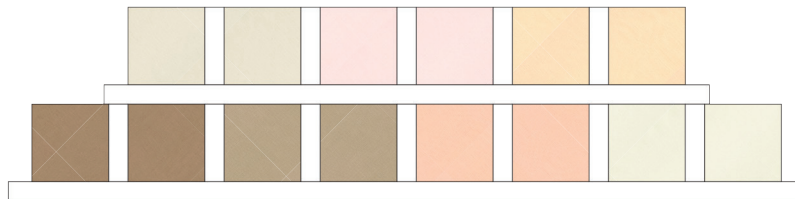


Step 21: Center and sew Row 5 to Row 6, as shown, using the block sashing seams to help you align the rows. Press. Repeat to make a second unit like this using Rows 12 and 13.

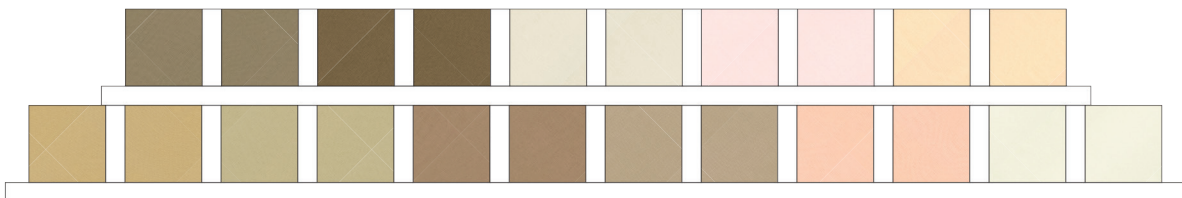



Step 22: Continue to sew rows together in pairs, as in Steps 19-21. (Rows 7 and 8, and Rows 10 and 11). Refer to the Quilt Assembly Diagram for fabric placement.

Step 23: Sew Rows 1-8 together, and Rows 10-17 together. Press. You will have two large triangle portions of the quilt at this point.

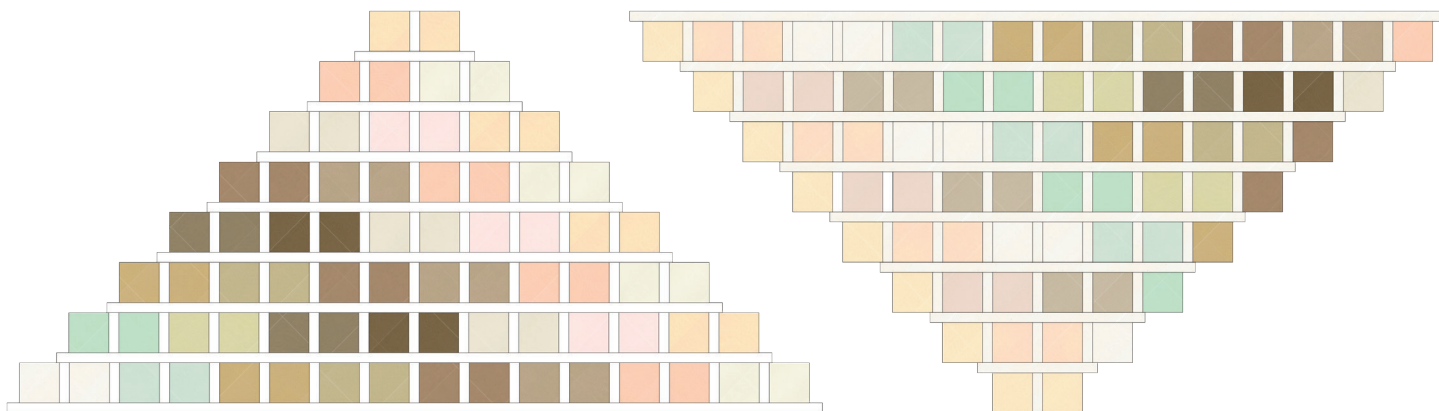

Step 24: Carefully place the remaining row of blocks (Row 9) between the two halves of the quilt. Notice how the two triangular halves are offset to form the final quilt top. Sew this row of blocks to each half. Press.

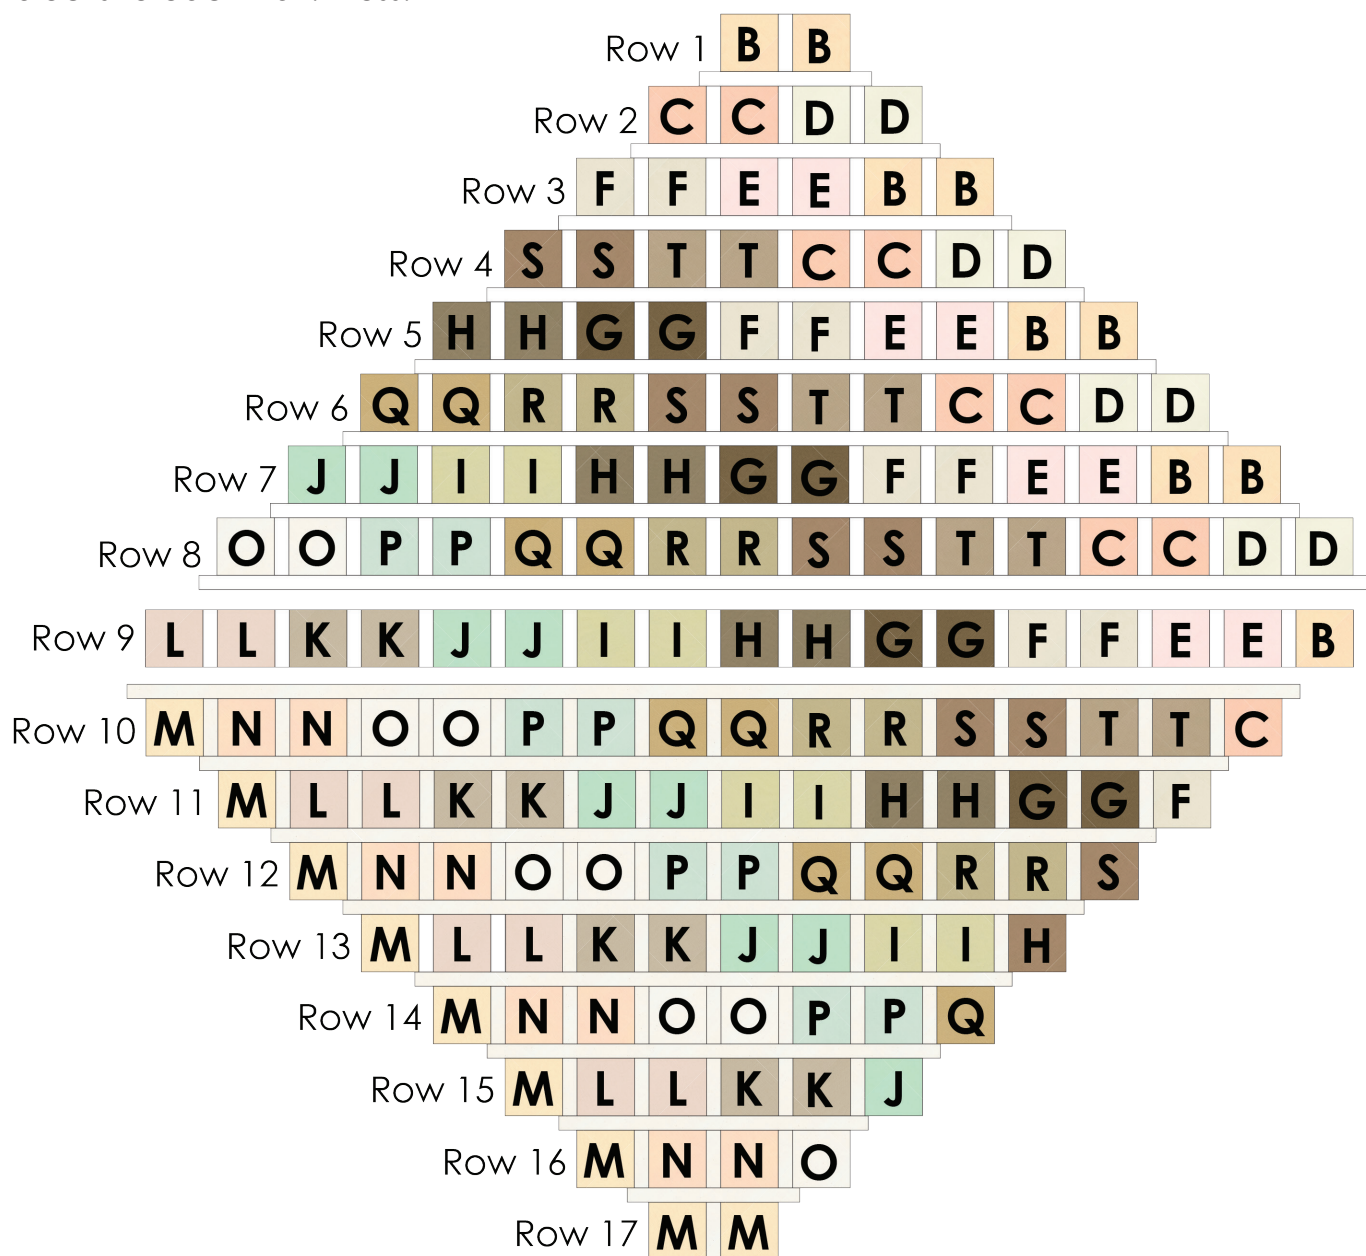

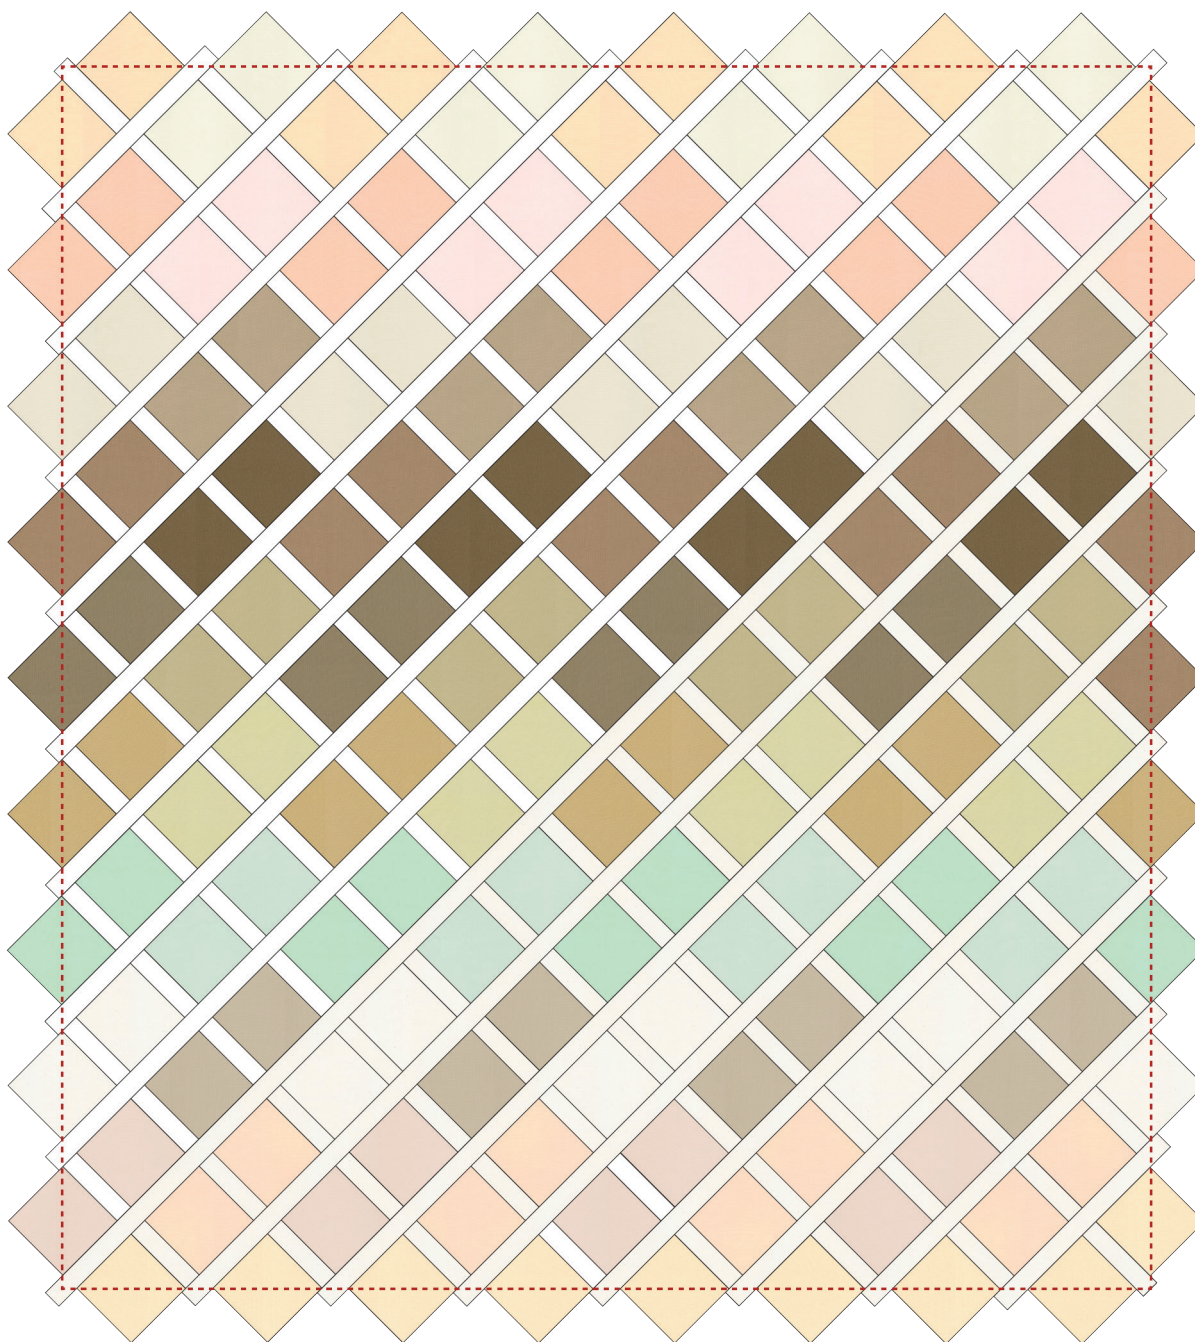

Step 25: Trim the quilt top to approximately 56" x 64", cutting off the ends of each row to square up the quilt. Because the outer edges of the quilt are now bias edges, you may wish to sew a line of stay-stitching around the outermost edge of the quilt, 1/8" from the edge. This will prevent the quilt top from stretching during quilting.

Your quilt top is complete! Baste, quilt, bind and enjoy!