STARFLOWER

Designed by Robert Kaufman Fabrics www.robertkaufman.com

Featuring Light and Shade theredthread.



Finished quilt measures: 92" x 114"





Fabric and Supplies Needed

Fabric amounts based on yardage that is 40" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	FQ-1005-24 LIGHT AND SHADE COMPLETE COLLECTION	1fat quarter bundle		F	K001-1333 SILVER	1 yard
	В	K001-359 PEPPER	4-3/4 yards		G	K001-1514 ROBIN EGG	3/8 yard
	C	K001-1007 ASH (includes binding)	1-1/3 yard		Н	K001-350 CHEDDAR	3/8 yard
	D	K001-1071 CHARCOAL	3/8 yard		I	K001-481 SANGRIA	3/8 yard
	E	K001-1176 ICE PEACH	1/8 yard		J	KOO1-91 STEEL	1/2 yard
Copyright 2015, Robert Kaufman For individual use only - Not for resale				You will also need: 8-1/2 yards for backing			

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 40" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

From each of the **Fabric A fat quarters**, cut:

- four 4-1/8" squares. Cut each square once on the diagonal, creating eight triangles.
- five 5-1/4" squares.

NOTE: This will create extra pieces but will allow for more simplified cutting and greater flexibility with fabric combinations.

From **Fabric B**, cut:

- ten 4-1/8" x WOF strips. Subcut ninety-six 4-1/8" squares. Cut each square once on the diagonal, creating one hundred ninety-two triangles.
- two 20-3/4" x WOF strips. Subcut four 20-3/4" squares.
- twenty-six 2-1/2" x WOF strips. Subcut fifteen 2-1/2" x 20-3/4" block sashing strips. Piece the remaining eighteen strips together end to end, then trim to create six 2-1/2" x 87-1/2" row sashing strips and two 2-1/2" x 113-3/4" side strips.

From **Fabric C**, cut:

- two 4-1/8" x WOF strips. Subcut sixteen 4-1/8" squares. Cut each square once on the diagonal, creating thirty-two triangles.
- one 5-1/4" x WOF strip. Subcut five 5-1/4" squares.
- eleven 2-1/2" x WOF strips for binding.

From **Fabric D**, cut:

- one 4-1/8" x WOF strip. Subcut four 4-1/8" squares. Cut each square once on the diagonal, creating eight triangles.
- one 5-1/4" x WOF strip. Subcut eight 5-1/4" squares.

From **Fabric E**, cut:

- one 4-1/8" x WOF strip. Subcut eight 4-1/8" squares. Cut each square once on the diagonal, creating sixteen triangles.
- one 5-1/4" x WOF strip. Subcut eight 5-1/4" squares.

From **Fabric F**, cut:

- seven 4-1/8" x WOF strips. Subcut sixty-four 4-1/8" squares. Cut each square once on the diagonal, creating one hundred twenty-eight triangles.
- one 5-1/4" x WOF strip. Subcut two 5-1/4" squares.

From **Fabric G**, cut:

- one 4-1/8" x WOF strip. Subcut four 4-1/8" squares. Cut each square once on the diagonal, creating eight triangles.
- one 5-1/4" x WOF strip. Subcut five 5-1/4" squares.

From **Fabric H**, cut:

- one 4-1/8" x WOF strip. Subcut six 4-1/8" squares. Cut each square once on the diagonal, creating twelve triangles.
- one 5-1/4" x WOF strip. Subcut eight 5-1/4" squares.


From **Fabric I**, cut:


- one 4-1/8" x WOF strip. Subcut six 4-1/8" squares. Cut each square once on the diagonal, creating twelve triangles.
- one 5-1/4" x WOF strip. Subcut eight 5-1/4" squares.

From **Fabric J**, cut:

• three 5-1/4" x WOF strips. Subcut seventeen 5-1/4" squares.

Assemble the Block



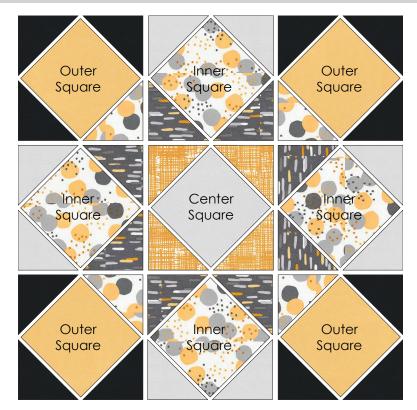

Tip: Make one complete block first to become familiar with the construction, then move on to sewing a few blocks assembly-line style if you wish.

On your work surface, arrange the block fabric pieces as follows:


- Select four squares to be the outer squares.
- Select four squares to be the inner squares.
- Select one square to be the center square.

Place three Fabric B triangles around each outer square.

Place two Fabric F triangles at the outer edges of the inner squares.

Fill in remaining twelve triangles, using the Block Assembly Diagram as your guide. Note that the fourth triangle on the outer squares is made from the same fabric as the inner squares.

Beginning with one square, sew triangles to the opposite sides of the square, pressing seams away from the square. Repeat, sewing two triangles to the remaining sides.

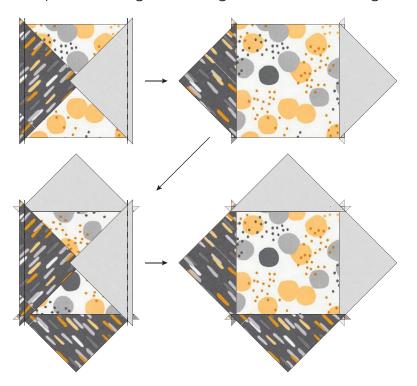

Continue this process for all nine squares in the block. Trim each block to 7-1/4" square, being sure to leave 1/4" beyond the middle square's points.

Carefully check the orientation, then sew the units into three rows of three to complete the block. Press seams in the first and third rows to the middle block and press seams in the second row away from the middle block. Press row seams open.

Repeat to make sixteen 20-3/4" square blocks.

Assemble the Quilt


Lay out the blocks, including the four 20-3/4" solid squares, following the Quilt Assembly Diagram, into five rows of four blocks each.

Sew a 2-1/2" x 20-3/4" block sashing strip between each block. Press seams toward the sashing. Repeat for all five rows.

Sew the 87-1/2" row sashing between the rows and to the top and bottom of the quilt. Press seams toward the sashing.

Sew the 113-3/4" side sashing to the left and right sides of the quilt. Press toward the sashing.

Your quilt top is now complete. Baste, bind, quilt and enjoy!

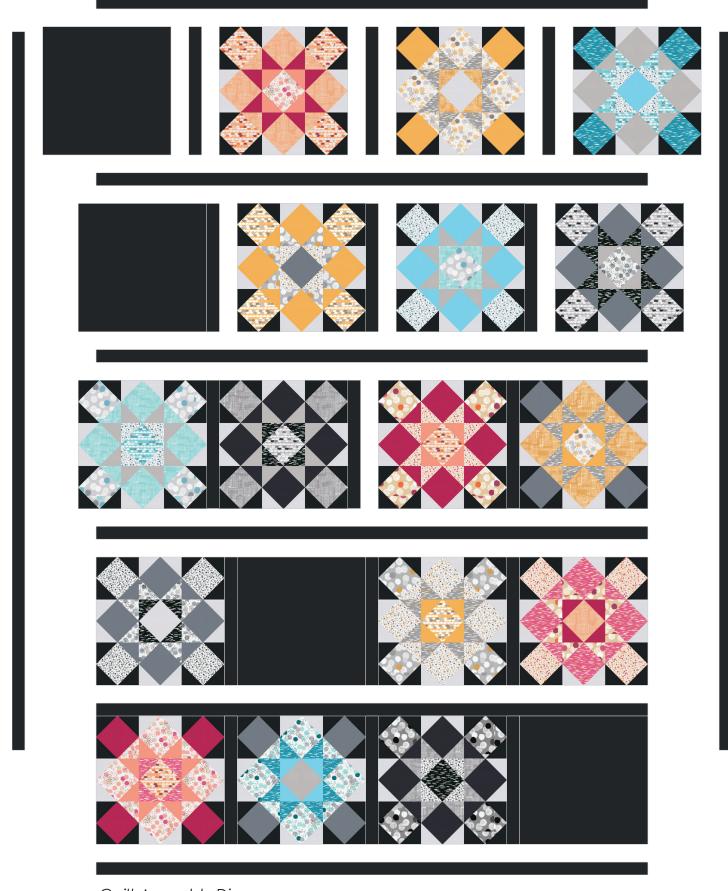

Quilt Assembly Diagram