


SLANTED STRIPES RUNNER

Designed by Robert Kaufman Fabrics
www.robertkaufman.com

Featuring **Stars and Stripes**

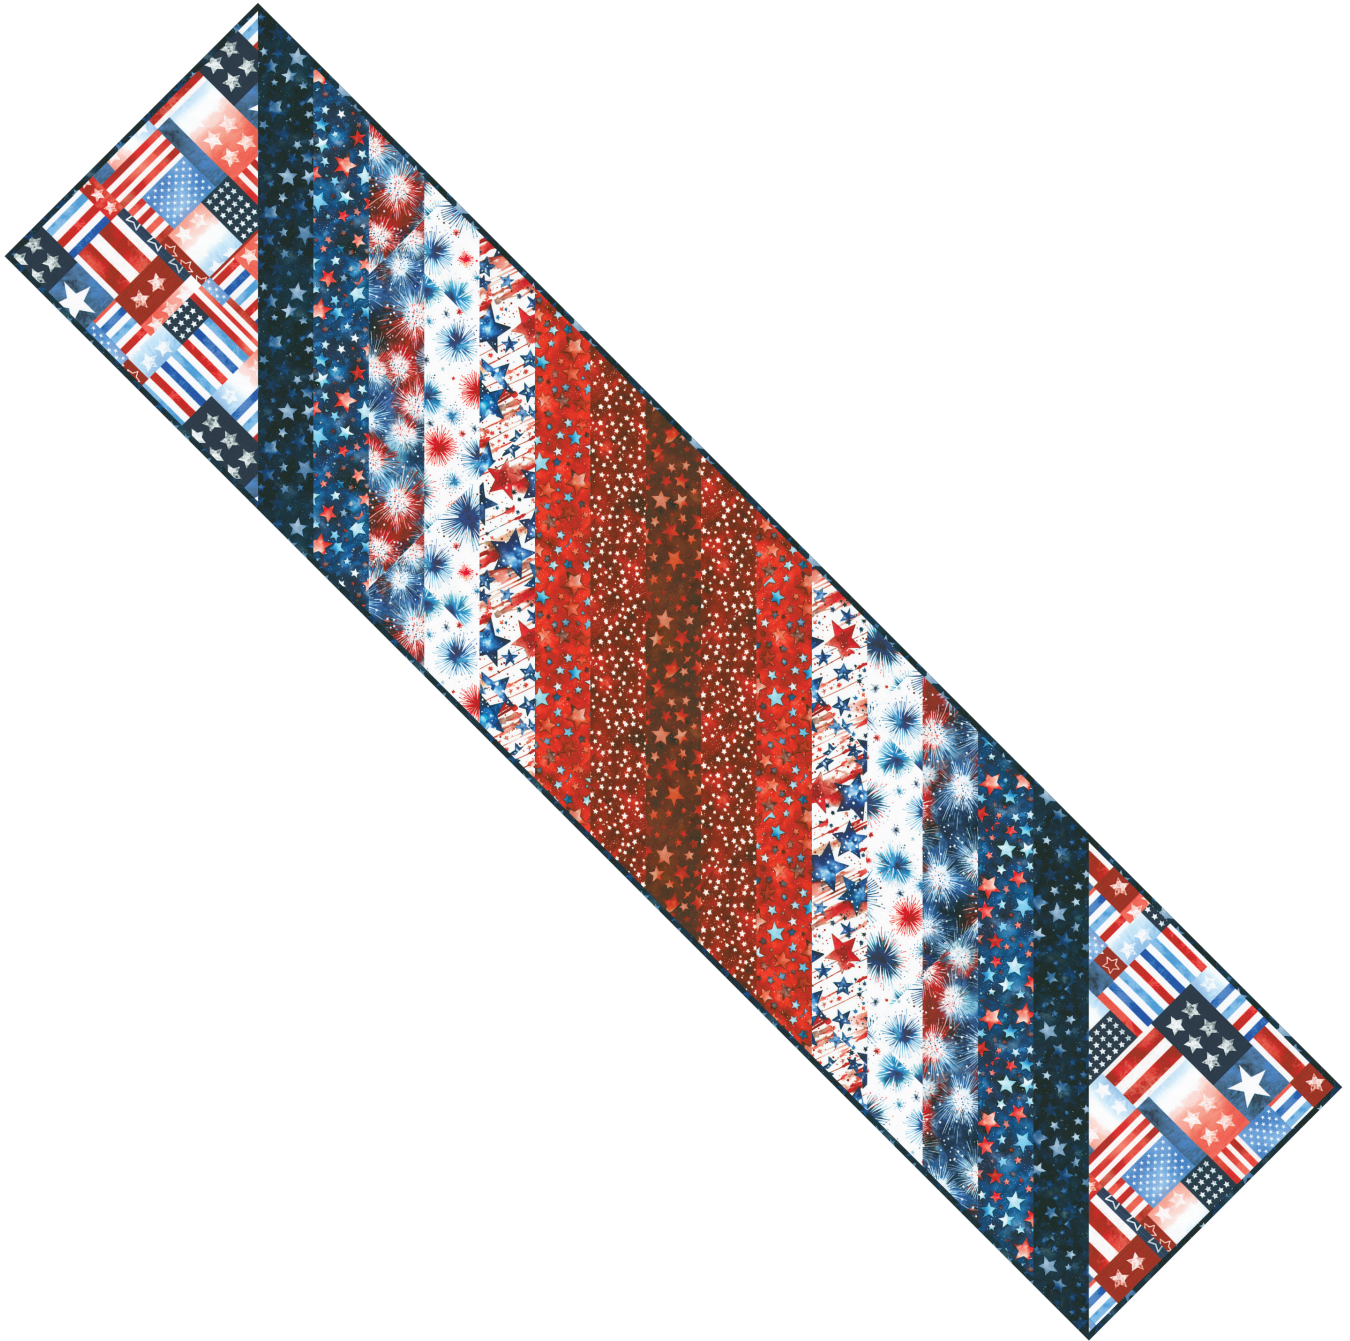

Finished project measures: 55" x 12-1/2"











Difficulty Rating: **Beginner**

ROBERTKAUFMAN
F A B R I C S

For questions about this pattern, please email Patterns@RobertKaufman.com.

Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	SRKD-23426-3	1/2 yard		F	SRKD-23431-1	1/8 yard
	B	SRKD-23427-4	1/8 yard		G	SRKD-23430-3	1/8 yard
	C	SRKD-23430-4	1/8 yard		H	SRKD-23426-3	1/8 yard
	D	SRKD-23429-203	1/8 yard		I	SRKD-23427-3	1/8 yard
	E	SRKD-23432-203	1/8 yard		Binding	SRKD-23427-4	1/3 yard

Copyright 2024, Robert Kaufman
For individual use only - Not for resale

You will also need:
1-1/4 yards for backing

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

From Fabric A, cut:

one 13-1/2" x WOF strip, subcut:

one 13-1/2" square, then cut the square once on the diagonal to yield two triangles.

From each of Fabrics B-H, cut:

one 2-1/2" x WOF strip, subcut:

two 2-1/2" x 20-1/2" rectangles.

From Fabric I, cut:

one 2-1/2" x WOF strip, subcut:


one 2-1/2" x 20-1/2" rectangle.

From the Binding Fabric, cut:


four 2-1/2" x WOF strips.

Assemble the Project Top


Step 1: Arrange the 2-1/2" Fabric B-I strips in a gradient pattern. When you are happy with the order of your strips, off set the ends of the strips by 2", then sew the strips together and press.

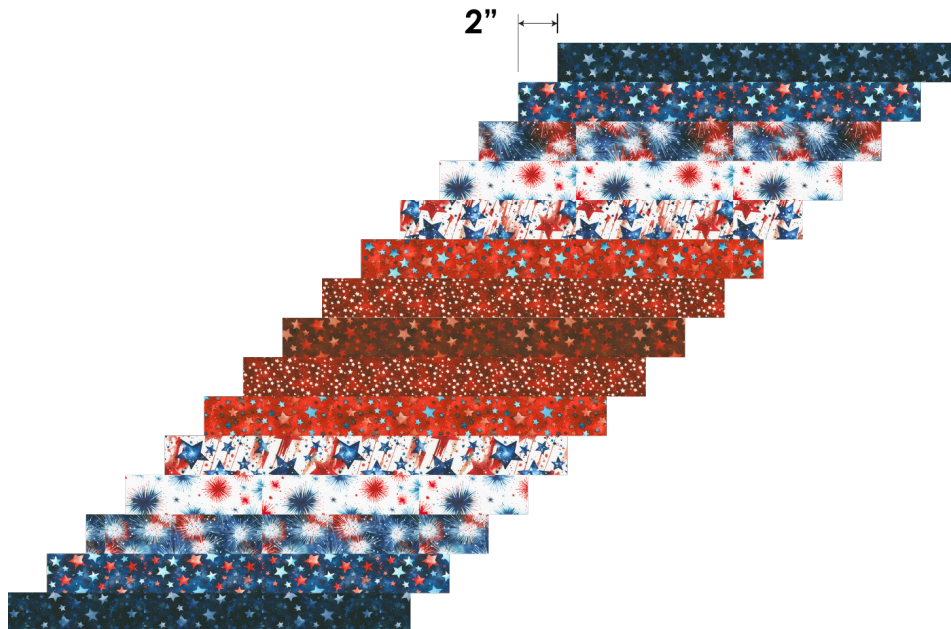

Step 2: Trim the staggered ends of the sewn unit by placing a ruler along the inner points of the strips and cutting along that line.

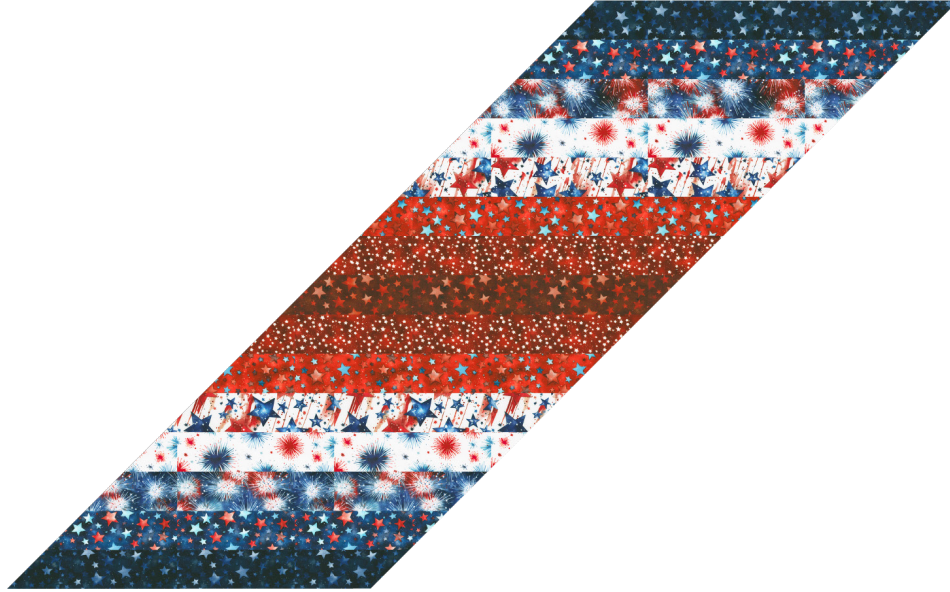

Step 3: Sew a Fabric A triangle to each end of the unit, then press.

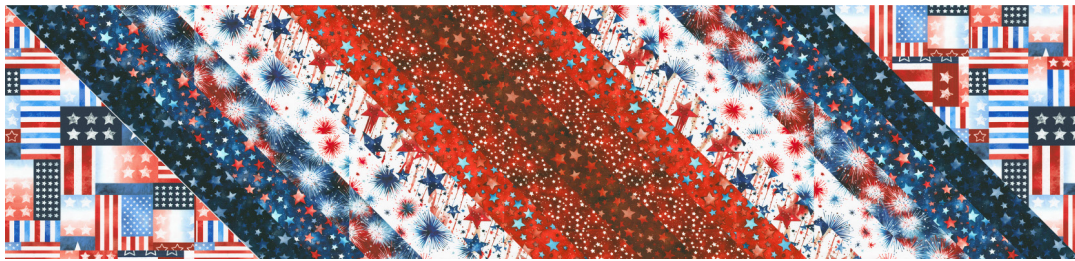

Your project top is complete! Baste, quilt, bind, and enjoy!