

Trail's End

Designed by Robert Kaufman Fabrics

Featuring **SOUND** of the
WOODS










Finished project measures 64" x 80"
Shown in "Shadow" colorstory. For alternate colorstories see pages 6-9.

Pattern Level: Experienced Intermediate

"I know the ropes and would like to test my skills!"

ROBERT KAUFMAN
F A B R I C S

Fabric and Supplies Needed

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	AVIM-15168-304 SHADOW	2/3 yard		E	AVIM-15171-304 SHADOW	1-3/8 yards
	B	AVIM-15169-304 SHADOW	3/8 yard		F	ETJ-9864-12 GREY	1-1/8 yards
	C	AVIM-15170-304 SHADOW	1-1/3 yards		G	SRKM-14476-290 ASH	1/4 yard
	D	AVIM-15171-133 GOLD	5/8 yard	You will also need: 5-1/8 yards Backing Fabric 1/2 yard Binding Fabric 70" x 86" Quilt Batting			

Notes Before You Begin

- Please read through all of the instructions before beginning.
- All of the seam allowances are a scant 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Remember to measure twice and cut once!

Cutting Instructions

Fabric A

- Trim the panel to 24" x 40-1/2"

Fabric B


- Cut two strips 2-1/2" x 36-1/2".
- Cut three strips 2-1/2" x WOF.

Fabric C

- Cut three strips 3-3/8" x WOF, then subcut into thirty-six squares 3-3/8" x 3-3/8".
- Cut two strips 2-3/4" x WOF.
- Cut two strips 2-1/2" x 24".
- Cut seven strips 3-1/2" x WOF.

Fabric D

- Cut six strips 3" x WOF, then subcut seventy-two squares 3" x 3".
Cut each square once on the diagonal.



Fabric E

- Cut seven strips 2-1/2" x WOF, then subcut one hundred twelve squares 2-1/2" x 2-1/2".
- Cut five strips 6-1/4" x WOF, then subcut twenty-eight squares 6-1/4" x 6-1/4".

Fabric F

- Cut nine strips 3" x WOF, then subcut one hundred twelve squares 3" x 3".
Cut each square once on the diagonal.
- Cut eight strips 1-1/2" x WOF.

Fabric G

- Cut four squares 4-1/2" x 4-1/2".
- Cut four squares 3-1/2" x 3-1/2".
- Cut four squares 2-1/2" x 2-1/2".
- Cut four rectangles 2-1/2" x 2-3/4".

Assembly Instructions

Make the Small Square in a Square (SIAS) Blocks

- Sew a Fabric D triangle to each side of a Fabric C square (fig. 1). Press seam allowances toward Fabric D and trim to 4-1/2" x 4-1/2" (fig. 2).

- Repeat to make thirty-six SAIS Blocks.




fig. 1




fig. 2

make 36

Assemble the Small SIAS Borders

- Sew seven small SAIS Blocks with short ends together. Sew a Fabric G square to each short end and press seam allowances toward Fabric G (fig. 3). Repeat to make a second border strip.



fig. 3

make 2



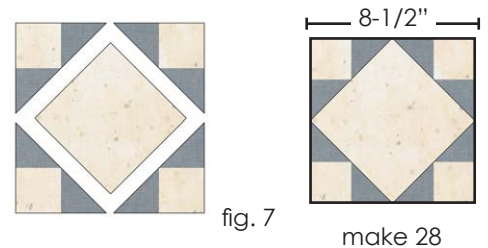


fig. 4

make 2

Make the Large SAIS Blocks

- Sew two Fabric F triangles to a Fabric E $2\frac{1}{2}$ " square, as pictured (fig. 5). Press the first seam allowance toward E and the second toward F.
- Repeat to make one hundred twelve E/F units (fig. 7).
- Sew an E/F unit to each side of a Fabric E $6\frac{1}{4}$ " square (fig. 7) matching the centers. Press seam allowances toward the center.
Block will measure $8\frac{1}{2}$ " x $8\frac{1}{2}$ "
- Repeat to make twenty-eight large SAIS blocks.






Assemble Diamond in a Square Borders

- Sew seven large SAIS blocks together to make a border strip (fig. 8).
- Repeat to make four border strips.



Assemble the Corner Block Borders


- Sew a Fabric G $2\frac{1}{2}$ " x $2\frac{3}{4}$ " rectangle to either short end of a Fabric C $2\frac{1}{2}$ " x $24\frac{1}{2}$ " strip. Repeat to make a second strip (fig. 9).
- Sew a Fabric G $2\frac{1}{2}$ " square to either short end of a Fabric B $3\frac{1}{2}$ " x $36\frac{1}{2}$ " strip. Repeat to make a second strip (fig. 10).
- Sew three Fabric C $3\frac{1}{2}$ " x WOF strips, short ends together. From this strip cut two strips $3\frac{1}{2}$ " x $56\frac{1}{2}$ ". Sew a Fabric G $3\frac{1}{2}$ " square to either short end of both strips (fig. 11).



Assemble the Quilt Top

- Follow the assembly diagram to sew the borders to the center panel in numerical order (fig. 12). You will need to sew the strips for the solid side borders with short sides together and trim to fit after sewing them to the quilt top.

Tip: Pin each border to the quilt top while it is laying on a flat surface. This will keep your borders from stretching as you sew them onto the quilt top.

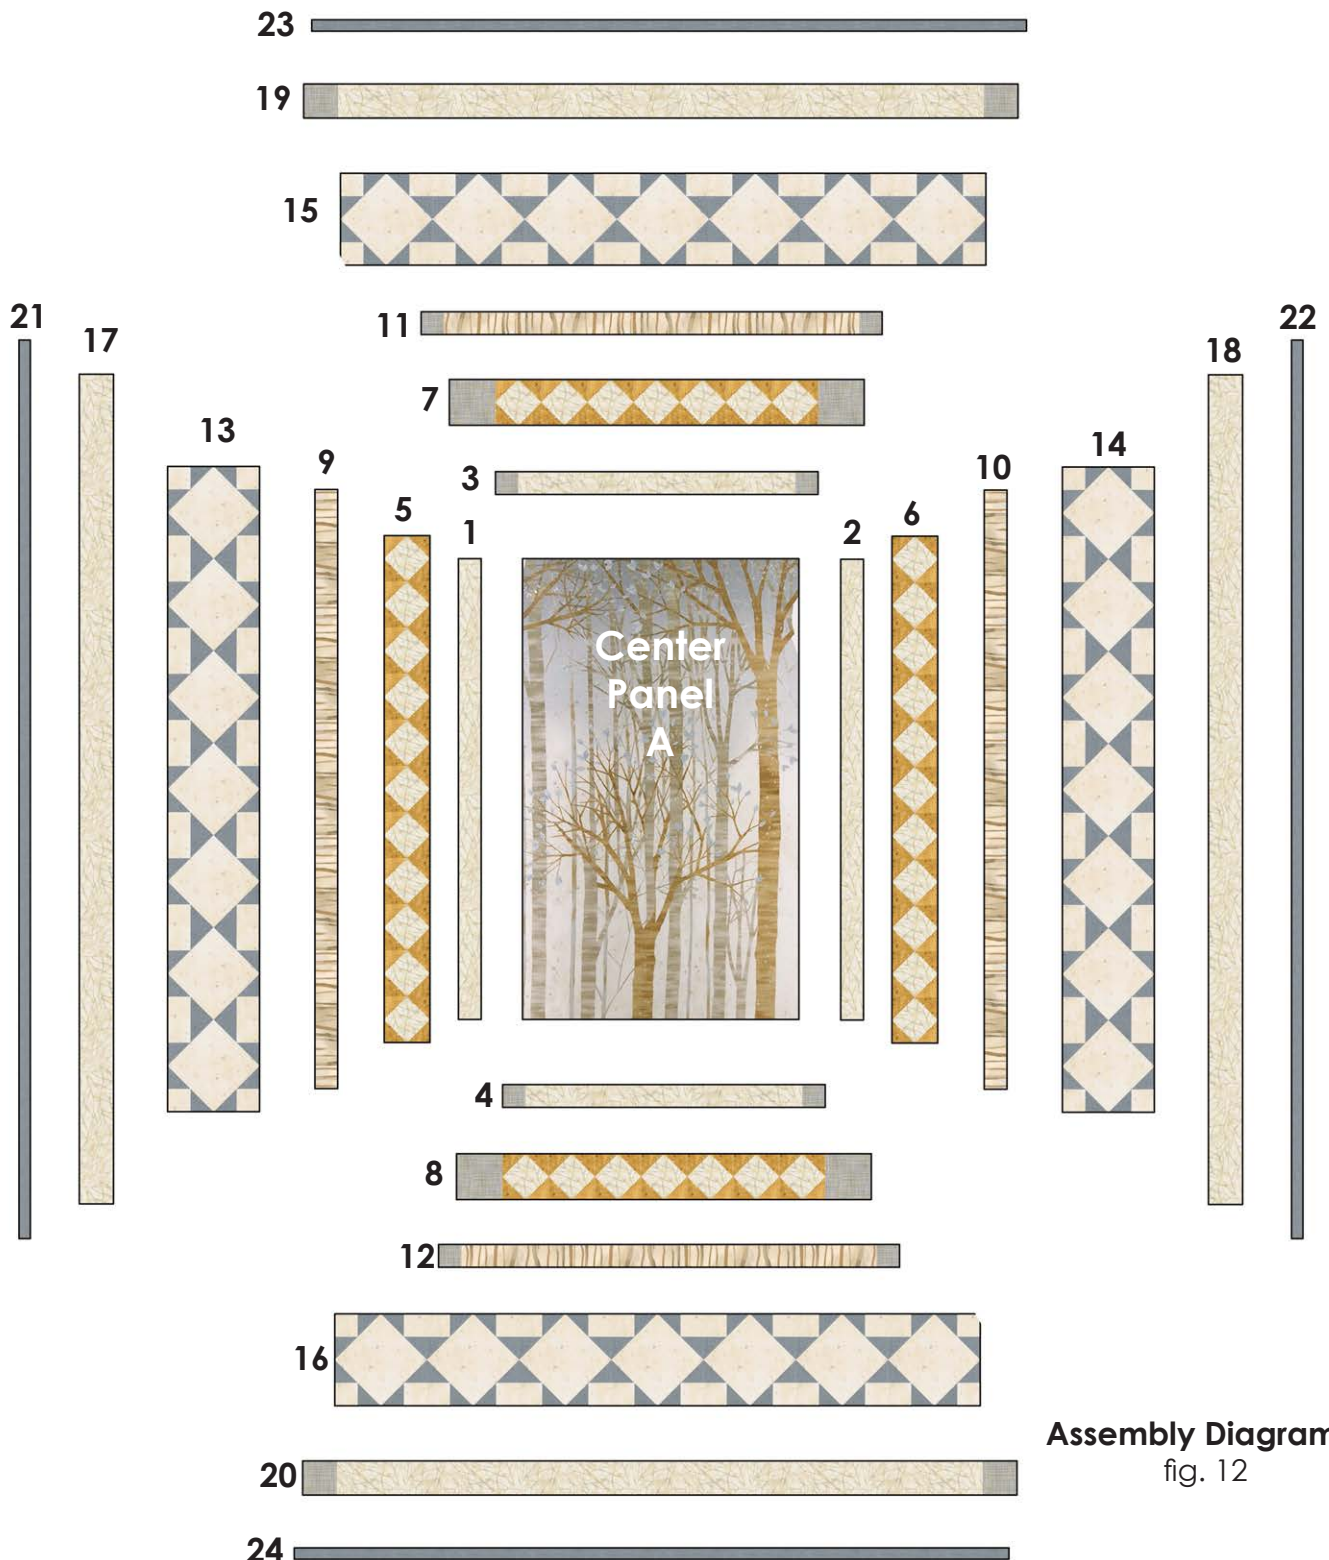








Assembly Diagram
fig. 12

Trail's End: "Mist" Colorway



Fabric and Supplies Needed

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	AVIM-15168-245 MIST	2/3 yard		E	AVIM-15171-15 IVORY	3/8 yard
	B	AVIM-15169-245 MIST	1-1/4 yards		F	AVIM-15171-245 MIST	3/8 yard
	C	AVIM-15170-245 MIST	1-3/4 yards		G	SRKM-14476-284 BONE	1/4 yard
	D	AVIM-15171-9 NAVY	1-1/4 yards	<p>You will also need: 5-1/8 yards Backing Fabric 1/2 yard Binding Fabric 70" x 86" Quilt Batting</p>			

Cutting Instructions

Fabric A

- Trim the panel to 24" x 40-1/2"

Fabric B

- Cut six strips 3" x WOF, then subcut seventy-two squares 3" x 3".
Cut each square once on the diagonal.
- Cut seven strips 3-1/2" x WOF.

Fabric C

- Cut seven strips 2-1/2" x WOF, then subcut one hundred twelve squares 2-1/2" x 2-1/2".
- Cut five strips 6-1/4" x WOF, then subcut twenty-eight squares 6-1/4" x 6-1/4".
- Cut two strips 2-3/4" x WOF.
- Cut two strips 2-1/2" x 24".

Fabric D

- Cut eight strips 1-1/2" x WOF.
- Cut nine strips 3" x WOF, then subcut one hundred twelve squares 3" x 3".
Cut each square once on the diagonal.

Fabric E

- Cut three strips 3-3/8" x WOF, then subcut into thirty-six squares 3-3/8" x 3-3/8".

Fabric F

- Cut two strips 2-1/2" x 36-1/2".
- Cut three strips 2-1/2" x WOF.

Fabric G








- Cut four squares 4-1/2" x 4-1/2".
- Cut four squares 3-1/2" x 3-1/2".
- Cut four squares 2-1/2" x 2-1/2".
- Cut four rectangles 2-1/2" x 2-3/4".

Follow the Assembly Instructions on pages 3-5, substituting in the appropriate fabrics. The fabric letters (Fabric A, Fabric B, etc..) will not be consistent, but the measurements for each piece will remain the same.

Trail's End: "Earth" Colorway



Fabric and Supplies Needed

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	AVIM-15168-169 EARTH	3/4 yard		E	AVIM-15171-169 EARTH	3/8 yard
	B	AVIM-15169-169 EARTH	1-1/4 yards		F	SRKM-14476-1 WHITE	1/3 yard
	C	AVIM-15170-169 EARTH	1-3/4 yards		G	SRKM-14476-153 SAND	1/4 yard
	D	AVIM-15171-16 BROWN	1-1/4 yards	<p>You will also need: 5-1/8 yards Backing Fabric 1/2 yard Binding Fabric 70" x 86" Quilt Batting</p>			

Cutting Instructions

Fabric A

- Trim the panel to 24" x 40-1/2"

Fabric B

- Cut six strips 3" x WOF, then subcut seventy-two squares 3" x 3".
Cut each square once on the diagonal.
- Cut seven strips 3-1/2" x WOF.

Fabric C

- Cut seven strips 2-1/2" x WOF, then subcut one hundred twelve squares 2-1/2" x 2-1/2".
- Cut five strips 6-1/4" x WOF, then subcut twenty-eight squares 6-1/4" x 6-1/4".
- Cut three strips 3-3/8" x WOF, then subcut into thirty-six squares 3-3/8" x 3-3/8".

Fabric D

- Cut eight strips 1-1/2" x WOF.
- Cut nine strips 3" x WOF, then subcut one hundred twelve squares 3" x 3".
Cut each square once on the diagonal.

Fabric E

- Cut two strips 2-1/2" x 36-1/2".
- Cut three strips 2-1/2" x WOF.

Fabric F

- Cut two strips 2-3/4" x WOF.
- Cut two strips 2-1/2" x 24".

Fabric G

- Cut four squares 4-1/2" x 4-1/2".
- Cut four squares 3-1/2" x 3-1/2".
- Cut four squares 2-1/2" x 2-1/2".
- Cut four rectangles 2-1/2" x 2-3/4".

Follow the Assembly Instructions on pages 3-5, substituting in the appropriate fabrics. The fabric letters (Fabric A, Fabric B, etc..) will not be consistent, but the measurements for each piece will remain the same.