

Treasure Trove

Designed by Robert Kaufman Fabrics

Featuring

**Nature's
Treasures**

Laura Van Horne
















Finished quilt measures: 87" x 115"

Pattern Level: Confident Beginner

*"I have basic block construction down
and would like to learn a new trick!"*

ROBERT KAUFMAN
F A B R I C S

Fabric and Supplies Needed

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	AVA-14779-142 AMBER	1 yard		H	AVA-14781-201 JEWEL	1/2 yard
	B	AVA-14779-201 JEWEL	1 yard		I	AVA-14781-228 LAPIS	1/2 yard
	C	AVA-14779-228 LAPIS	1 yard		J	K001-484 ASTRAL	1-1/8 yard
	D	AVA-14780-142 AMBER	1/2 yard		IK	K001-492 LATTE	1 yard
	E	AVA-14780-201 JEWEL	1/2 yard		L	K001-495 MORNING GLORY	1-1/3 yard
	F	AVA-14780-228 LAPIS	1/2 yard		M	K001-1387 WHITE	3-1/2 yard
	G	AVA-14781-142 AMBER	1/2 yard	You will also need: 3/4 yard Binding 7-3/4 yards Backing Fabric and Batting			

Notes Before You Begin

- Please read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Press all seam allowances open after each seam is sewn, unless otherwise noted.
- Remember to measure twice and cut once!

Cutting Instructions

Fabric A

- Cut eight squares 9" x 9", then cut on the diagonal to make HSTs.

Fabric B

- Cut nine squares 9" x 9", then cut on the diagonal to make HSTs.

Fabric C

- Cut ten squares 9" x 9", then cut on the diagonal to make HSTs.

Fabric D, E, G and I

- Cut two strips 5" x WOF, then subcut twelve squares 5" x 5".

Fabric F

- Cut two strips 5" x WOF, then subcut fourteen squares 5" x 5".

Fabric H

- Cut two strips 5" x WOF, then subcut thirteen squares 5" x 5".

Fabric J

- Cut four strips 5" x WOF, then:
 - subcut ten squares 5" x 5".
 - subcut twenty squares 5" x 5", then cut on the diagonal to make HSTs.
- Cut four strips 4-1/2" x WOF, then subcut thirty-two squares 4-1/2" x 4-1/2".

Fabric K


- Cut three strips 5" x WOF, then:
 - subcut eight squares 5" x 5"
 - subcut sixteen squares 5" x 5", then cut on the diagonal to make HSTs
- Cut four strips 4-1/2" x WOF, then subcut thirty-two squares 4-1/2" x 4-1/2".

Fabric L

- Cut four strips 5" x WOF, then:
 - subcut nine squares 5" x 5"
 - subcut sixteen squares 5" x 5", then cut on the diagonal to make HSTs.
- Cut six strips 4-1/2" x WOF, then subcut forty-eight squares 4-1/2" x 4-1/2"


Fabric M

- Cut six strips 5" x WOF, then subcut into forty-eight squares 5" x 5"
- Cut nineteen strips 4-1/2" x WOF, then subcut ten strips into sashing strips 4-1/2" x 16-1/2".





Assembly Instructions

Step 1: Make Half Square Triangles (HSTs)



- Place a Fabric D 5" square and a Fabric K 5" square with right sides together. Draw a diagonal line from corner to corner and sew a scant $\frac{1}{4}$ " from each side of the line.


- Cut along the drawn line and press seam allowances open. Trim to $4\frac{1}{2}$ " x $4\frac{1}{2}$ ".





You will now have two HSTs.
Repeat to make one hundred fifty HSTs based on the chart below:

Fabrics	# of HSTs	Fabrics	# of HSTs
H/L	10	F/J	12
E/L	8	F/M	16
H/M	16	G/K	8
E/M	16	G/M	16
I/J	8	D/K	8
I/M	16	D/M	16

Step 2: Assemble Blocks




- Sew two Fabric K triangles to the print sides of a Fabric G/K HST. Press seam allowance toward the triangles.

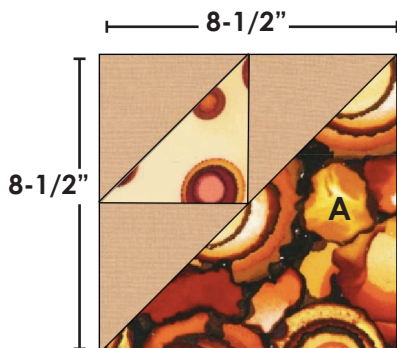


- Sew a Fabric A triangle to the G/K triangle unit. Press seam allowance toward Fabric A.
- The block should measure $8\frac{1}{2}$ " x $8\frac{1}{2}$ ".
- Repeat to make a second block.

- Sew block together as pictured. You will first make two 4-patch blocks using two Fabric K 4-1/2" squares and two G/M HSTs per block. Next, sew the 4-patch blocks to the triangle blocks to complete the block.


- Block should measure 16-1/2" x 16-1/2".

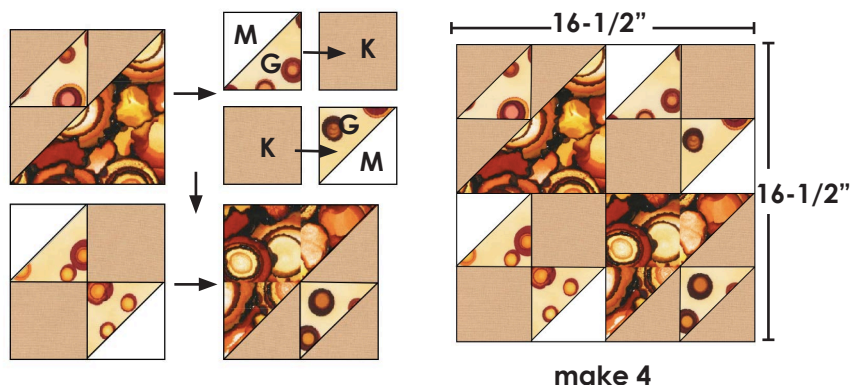


- Repeat Step 2 to make blocks according to the diagrams below:




make 4




make 4



make 2




make 2




make 4


- Assemble half and quarter blocks the same way as the whole blocks. Refer to the diagrams below:




make 4




make 4



make 2



make 2





make 2

Step 3: Assemble Quilt

- Refer to the assembly diagram and sew blocks into diagonal rows with Fabric M 4-1/2" x 16-1/2" sashing between each block. Press seam allowance toward sashing.
- Sew rows together diagonally with Fabric M 4-1/2" sashing in between. You will need to piece the sashing for the longer rows. Press seam allowance toward sashing.

Assembly Diagram

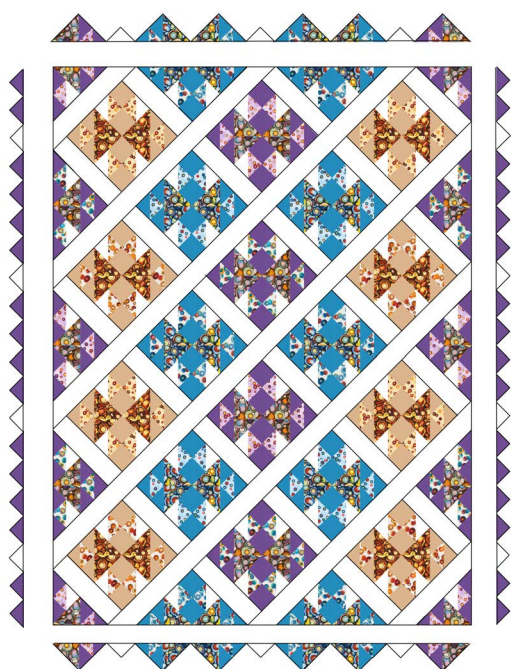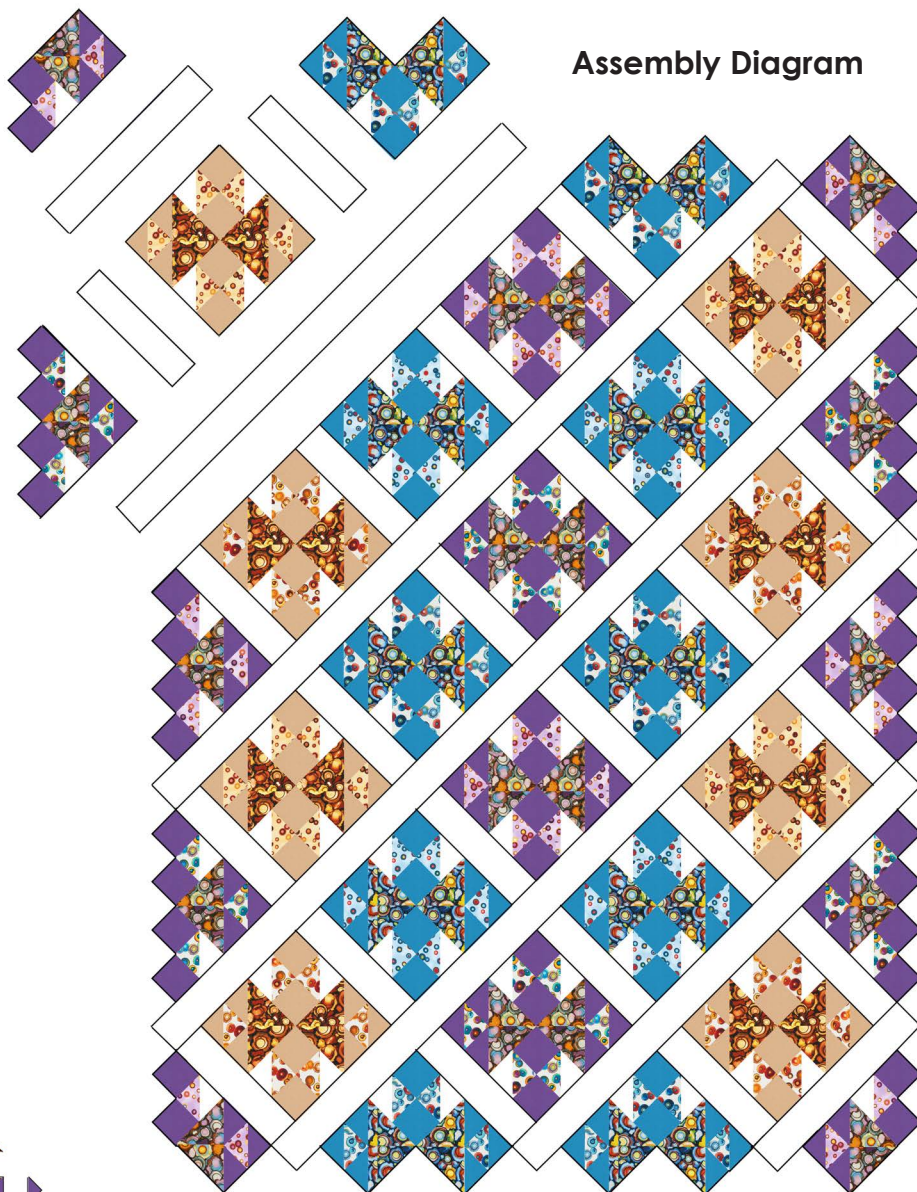

- Trim edges to true up the sides.

Your quilt top is complete! Baste, quilt, bind & enjoy.