

WHIRLING SPARKS

Designed by Elise Lea for RK
www.robertkaufman.com

Featuring **KONA**[®]
cotton solids



Finished quilt measures: 57" x 66"










Difficulty Rating: **Intermediate**

ROBERTKAUFMAN
F A B R I C S

For questions about this pattern, please email Patterns@RobertKaufman.com.

Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
	A	K001-1019 BLACK	2-1/2 yards		F	K001-1370 TANGERINE	5/8 yard
	B	K001-1091 CRIMSON	1/3 yard		G	K001-1265 ORANGE	5/8 yard
	C	K001-1551 RICH RED	5/8 yard		H	K001-1482 SCHOOL BUS	1/4 yard
	D	K001-1296 POPPY	5/8 yard		Binding*	K001-1194 LIPSTICK	1/2 yard
	E	K001-323 FLAME	5/8 yard	<div>You will also need: 3-5/8 yards for backing</div>			
Copyright 2021, Robert Kaufman For individual use only - Not for resale							

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

From Fabric A, cut:

six 3" x WOF strips. Subcut:

eighty-four 3" squares for the HSTs

seventeen 2-1/2" x WOF strips. Sew six strips together, end-to-end, then trim:

two 2-1/2" x 62-1/2" side outer borders

two 2-1/2" x 57-1/2" top/bottom outer borders

From the remaining eleven strips, subcut:

one hundred sixty-eight 2-1/2" squares

seventeen 1-1/2" x WOF strips. Sew eight strips together, end-to-end, then trim:

six 1-1/2" x 53-1/2" row sashing strips

From the remaining nine strips, subcut:

thirty-five 1-1/2" x 8-1/2" block sashing strips

From Fabric B, cut:

four 2-1/2" x WOF strips. Subcut:

twenty-eight 2-1/2" x 4-1/2" rectangles

From each of Fabrics C-G, cut:

one 3" x WOF strip. Subcut:

fourteen 3" squares for the HSTs

six 2-1/2" x WOF strips. Subcut:

twenty-eight 2-1/2" x 4-1/2" rectangles

twenty-eight 2-1/2" squares. Mark a diagonal line on the back of each square.

From Fabric H, cut:

one 3" x WOF strip. Subcut:

fourteen 3" squares for the HSTs

two 2-1/2" x WOF strips. Subcut:

twenty-eight 2-1/2" squares. Mark a diagonal line on the back of each square.

From the Binding Fabric, cut:

seven 2-1/2" x WOF strips

Assemble the Half-Square Triangles (HSTs)

Step 1: Pair a 3" Fabric A square with a 3" Fabric C square, RST. Mark a diagonal line on the wrong side of one square. Sew 1/4" away from both sides of the marked line. Cut on the marked line, creating two half-square triangles (HSTs). Press toward the darker fabric. Trim to 2-1/2" square. Repeat to make twenty-eight A/C HSTs.



Step 2: Repeat Step 1 to make:



twenty-eight
A/D HSTs



twenty-eight
A/E HSTs



twenty-eight
A/F HSTs



twenty-eight
A/G HSTs



twenty-eight
A/H HSTs

Assemble the Stitch and Flip Units

Step 3: Place a 2-1/2" Fabric C square at one end of a Fabric B rectangle, right sides together. Note the orientation of the marked diagonal line. Sew on the marked line, then trim away the excess fabric, leaving a 1/4" seam allowance. Press. Repeat to make twenty-eight B/C units.



Step 4: Repeat Step 3 to make:



twenty-eight C/D HSTs



twenty-eight D/E HSTs



twenty-eight E/F HSTs



twenty-eight F/G HSTs




twenty-eight G/H HSTs

Assemble the Blocks

Step 5: Gather:
four A/C HSTs

Arrange the HST units into two rows of two, to form a pinwheel unit. Note the fabric placement and block orientation in the Block Assembly Diagram.




Step 6: Sew the squares together to form the rows. Press the seams in opposite directions.

Step 7: Sew the rows together, nesting the seams and pressing the seams to one side to form the block center.

Step 8: Gather:
the completed Step 7 unit
four B/C Stitch and Flip units
four 2-1/2" Fabric A squares


Arrange the units into three rows of three. Note the fabric placement and block orientation in the Block Assembly Diagram.




Step 9: Sew the units together to form the rows. Press the seams toward the stitch and flip units.

Step 10: Sew the rows together, nesting the seams and pressing the seams to one side to form the block.

The resulting Block should measure 8-1/2" square. Make seven B/C Blocks. Repeat to make:



seven C/D Blocks



seven D/E Blocks



seven E/F Blocks



seven F/G Blocks



seven G/H Blocks


Assemble the Quilt

Step 11: Arrange the Blocks together as indicated in the Quilt Assembly Diagram. Sew each row together, using sashing strips between each block. Press seams toward the sashing. Repeat to make seven block rows.

Step 12: Sew the sashing and block rows together, pinning and nesting the seams. Press seams open or to the sashing.

Step 13: Sew the borders to the sides of the quilt center. Press toward the border. Sew the borders to the top and bottom of the quilt center. Press toward the border.

Your quilt top is complete! Baste, quilt, bind and enjoy!

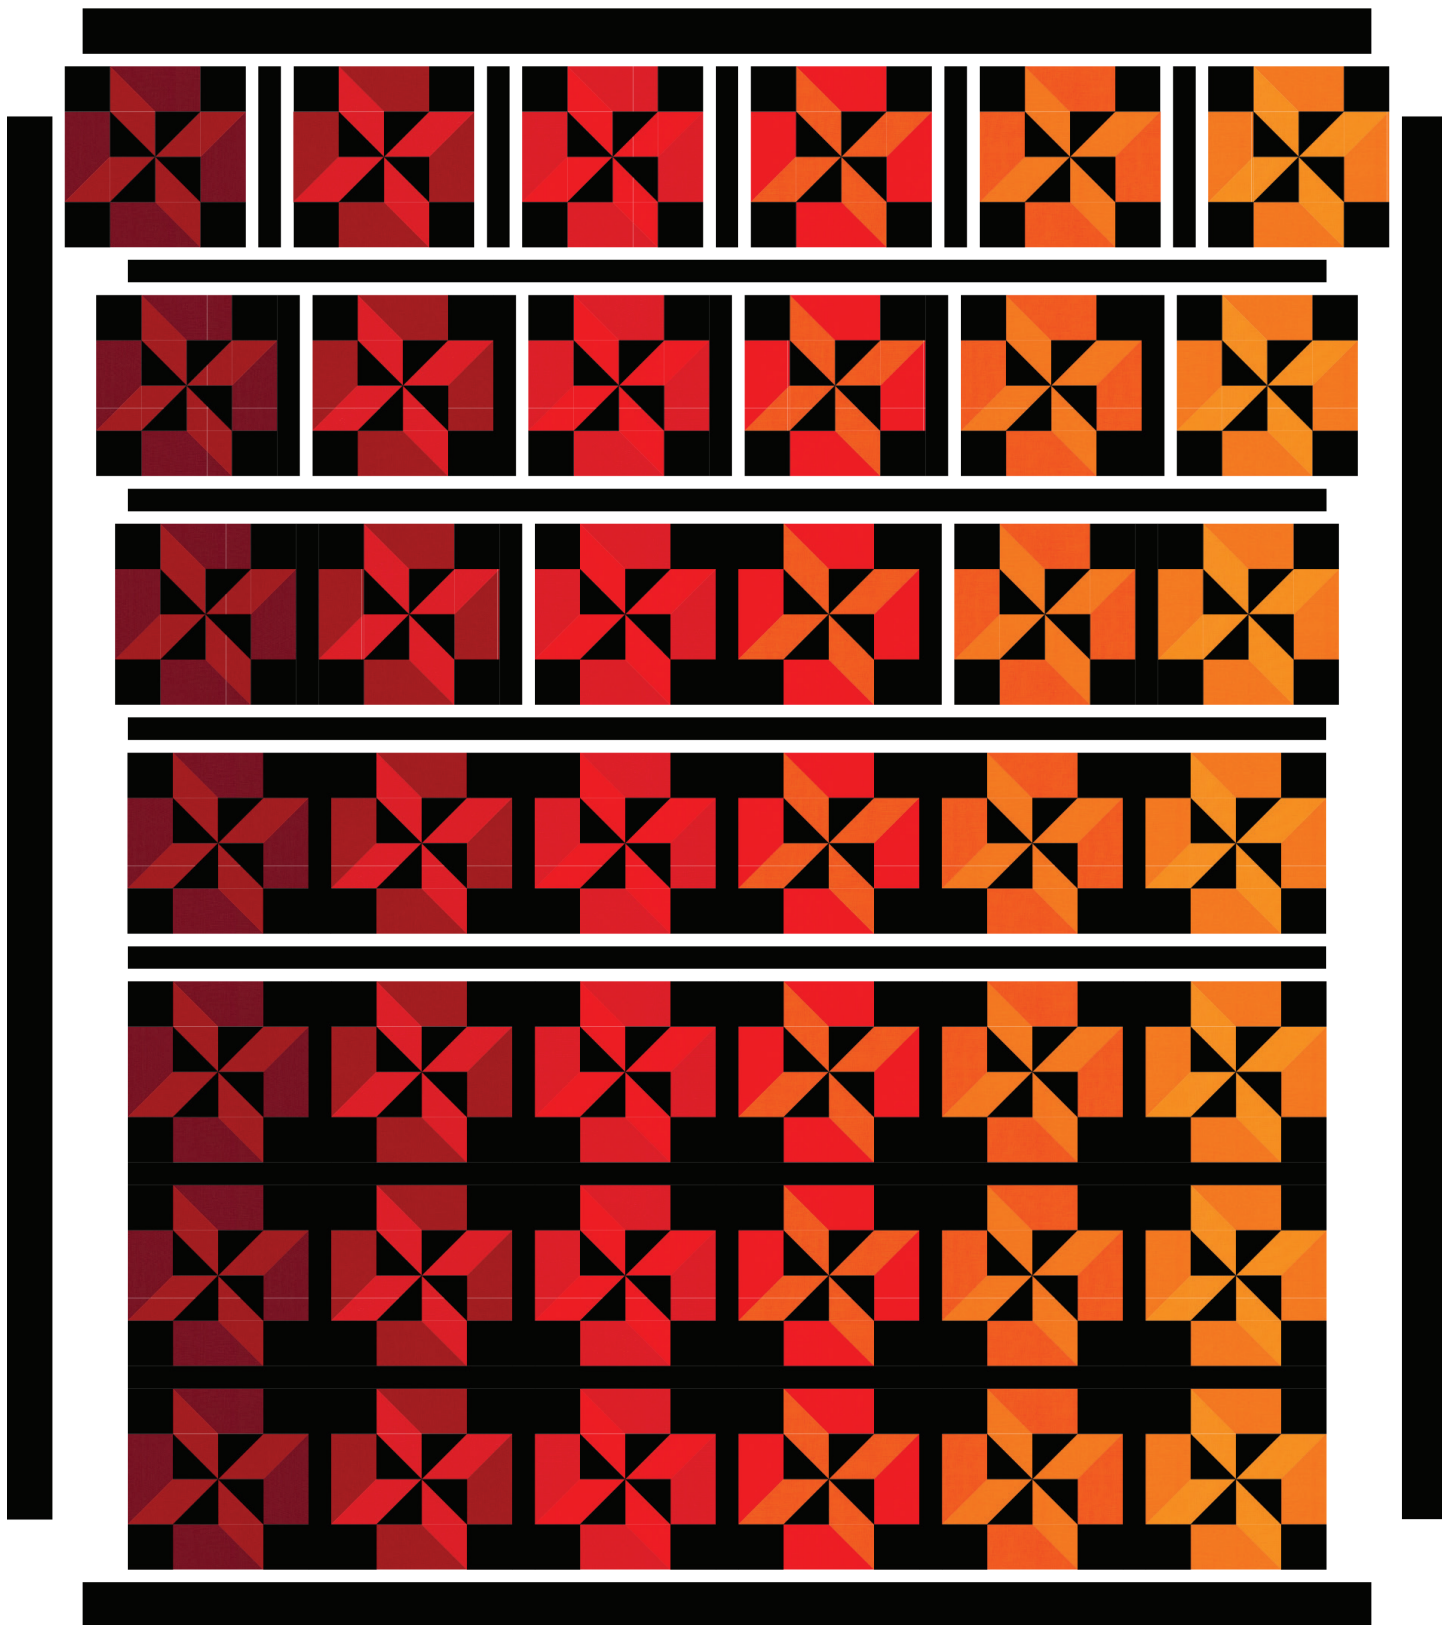

This pattern may be used for personal purposes only and may not be reproduced in any form without the express permission from Robert Kaufman Fabrics. This pattern is not for resale. All patterns, unless otherwise attributed, are © Robert Kaufman Co., Inc. 2005-2021. All rights reserved.