


Constellation

featuring
posies

Quilt designed by Cheri House • Approx. 67" x 72"

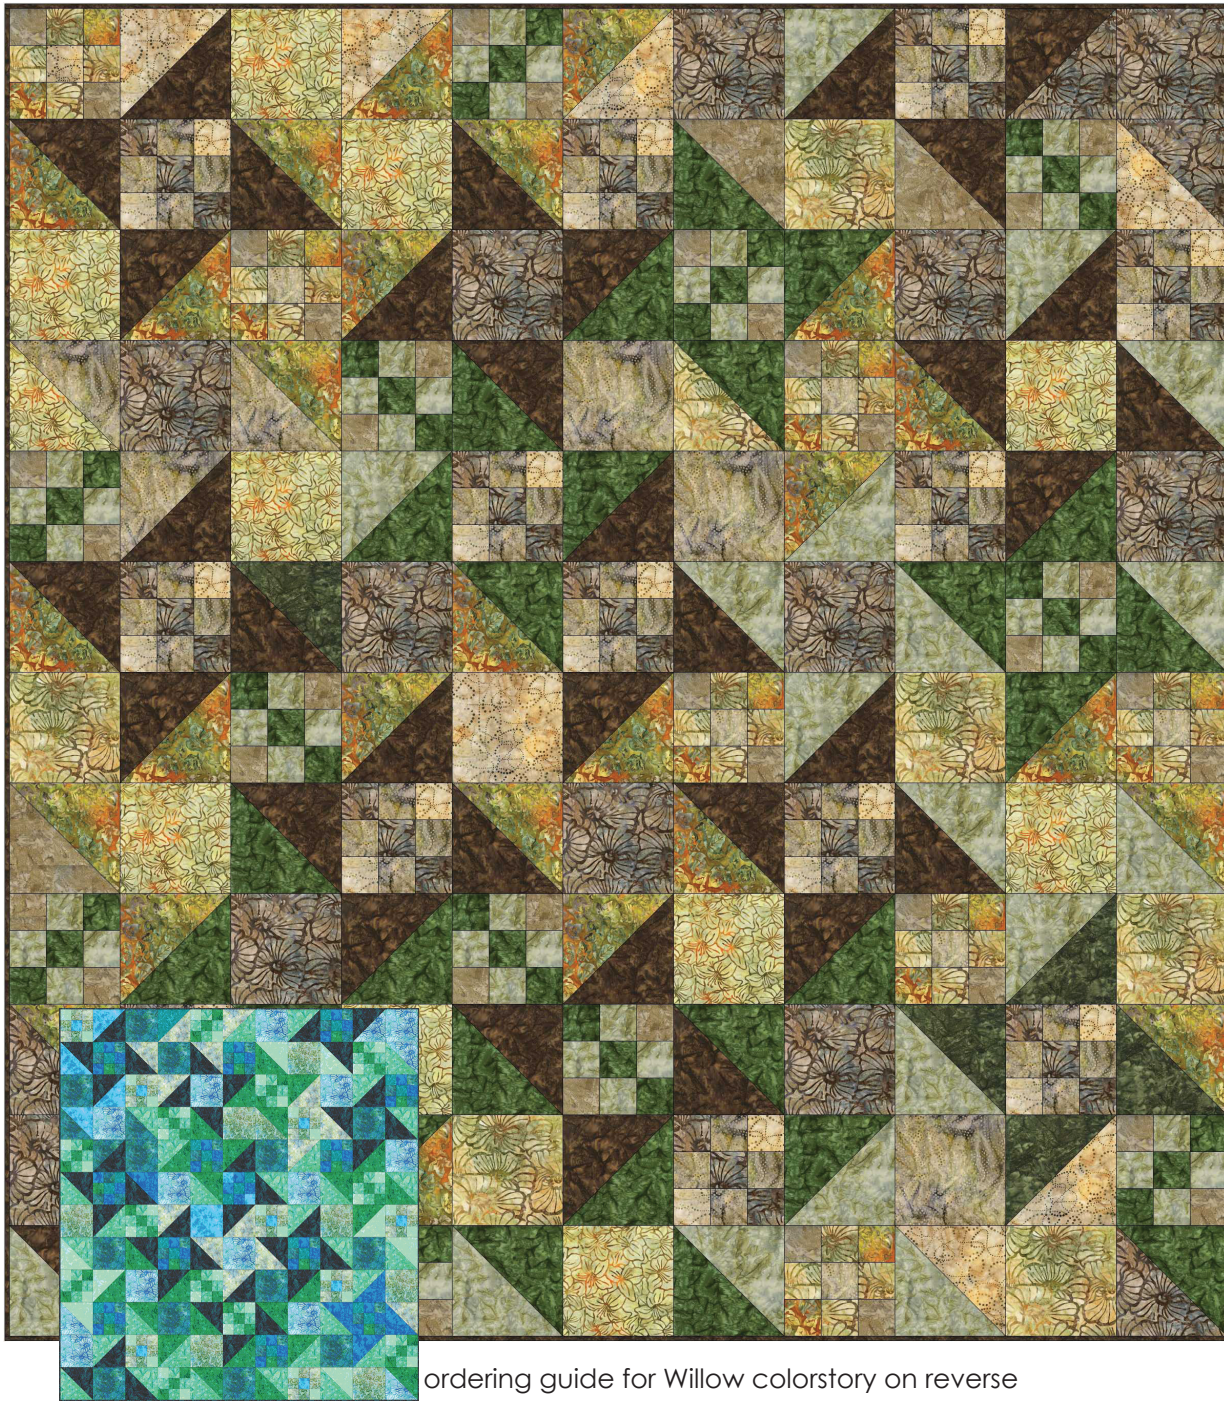

ordering guide for Willow colorstory on reverse



AMD-7394-163 Spice
3/8 yard




AMD-9302-163 Spice
5/8 yard




AMD-9302-175 Nutmeg
3/4 yard




AMD-9303-163 Spice
3/4 yard




AMD-9304-142 Amber
1/2 yard




AMD-7000-48 Jungle
3/4 yard




AMD-7000-45 Moss
1/4 yard




AMD-7000-58 Cactus
3/8 yard



AMD-7000-176 Bronze
1 yard



AMD-7000-161 Straw
5/8 yard



AMD-7201-183 Pewter
5/8 yard

ROBERTKAUFMAN
F A B R I C S
www.robertkaufman.com

Pattern available to purchase directly from
www.cherryhousequilts.com
Wholesale Price: \$ 4.50

constellation by cherry house quilts, spice colorstory

ordering guide - quilt pattern

pattern number	1 kit ydg	bolts	5 kits	bolts	10 kits	bolts	15 kits	bolts	25 kits	bolts	50 kits	bolts
amd-9303-163	3/4	1	3 3/4	1	7 1/2	1	11 1/4	1	18 3/4	2	37 1/2	3
amd-9302-163	5/8	1	3 1/8	1	6 1/4	1	9 3/8	1	15 5/8	2	31 1/4	3
amd-9302-175	3/4	1	3 3/4	1	7 1/2	1	11 1/4	1	18 3/4	2	37 1/2	3
amd-7394-163	3/8	1	1 7/8	1	3 3/4	1	5 5/8	1	9 3/8	1	18 3/4	2
amd-7201-183	5/8	1	3 1/8	1	6 1/4	1	9 3/8	1	15 5/8	2	31 1/4	3
amd-9304-142	1/2	1	2 1/2	1	5	1	7 1/2	1	12 1/2	1	25	2
amd-7000-161	5/8	1	3 1/8	1	6 1/4	1	9 3/8	1	15 5/8	2	31 1/4	3
amd-7000-176	1	1	5	1	10	1	15	1	25	2	50	4
amd-7000-58	3/8	1	1 7/8	1	3 3/4	1	5 5/8	1	9 3/8	1	18 3/4	2
amd-7000-45	1/4	1	1 1/4	1	2 1/2	1	3 3/4	1	6 1/4	1	12 1/2	1
amd-7000-48	3/4	1	3 3/4	1	7 1/2	1	11 1/4	1	18 3/4	2	37 1/2	3

constellation by cherry house quilts, willow colorstory

ordering guide - quilt pattern

pattern number	1 kit ydg	bolts	5 kits	bolts	10 kits	bolts	15 kits	bolts	25 kits	bolts	50 kits	bolts
amd-9302-241	5/8	1	3 1/8	1	6 1/4	1	9 3/8	1	15 5/8	2	31 1/4	3
amd-9303-39	5/8	1	3 1/8	1	6 1/4	1	9 3/8	1	15 5/8	2	31 1/4	3
amd-7394-241	3/4	1	3 3/4	1	7 1/2	1	11 1/4	1	18 3/4	2	37 1/2	3
amd-7026-39	1/2	1	2 1/2	1	5	1	7 1/2	1	12 1/2	1	25	2
amd-7000-32	5/8	1	3 1/8	1	6 1/4	1	9 3/8	1	15 5/8	2	31 1/4	3
amd-7000-213	1	1	5	1	10	1	15	1	25	1	50	2
amd-7000-51	3/8	1	1 7/8	1	3 3/4	1	5 5/8	1	9 3/8	2	18 3/4	3
amd-7000-35	1	1	5	1	10	1	15	1	25	2	50	4
amd-7000-215	5/8	1	3 1/8	1	6 1/4	1	9 3/8	1	15 5/8	1	31 1/4	2
amd-7000-79	1/2	1	2 1/2	1	5	1	7 1/2	1	12 1/2	1	25	1
amd-7000-28	7/8	1	4 3/8	1	8 3/4	1	13 1/8	1	21 7/8	2	43 3/4	3

bolt requirement based on 15 yd put-up